




# Screws

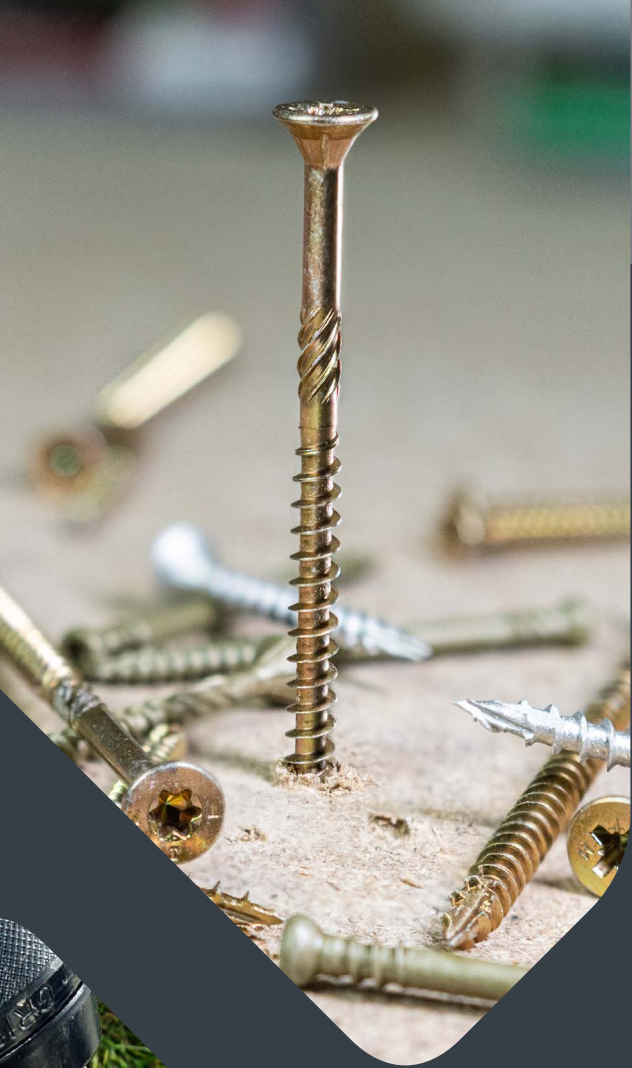

# Screws

## Timber Construction Screws

|                            |       |
|----------------------------|-------|
| Premium Woodscrews         | 9-15  |
| Multi-Purpose Woodscrews   | 17-19 |
| Woodscrews                 | 21-26 |
| Mirror & Decorative Screws | 27    |
| Screw Caps & Covers        | 28    |
| Decking & Timber Screws    | 29    |
| Coach Screws               | 35    |

## Dry-Lining, Collated & Roofing Screws

|                         |    |
|-------------------------|----|
| Drywall Screws          | 36 |
| Cement Board Screws     | 37 |
| Collated Drywall Screws | 38 |
| Collated Screws         | 39 |

## Metal Construction Screws

|                               |       |
|-------------------------------|-------|
| Self-Drilling Screws          | 41-43 |
| Fibre Cement Board Screws     | 43    |
| Slash Point Screws            | 43    |
| Wing-Tip Self-Drilling Screws | 44    |
| Washers, Caps & Sheet Fixings | 45    |
| Metal Framing Screws          | 46    |
| Self-Tapping Screws           | 47-48 |
| Machine Screws                | 49    |

## Window Fabrication Screws

|                                |    |
|--------------------------------|----|
| Specialist Window Screws       | 51 |
| Screws for Reinforced Frames   | 52 |
| Screws for Unreinforced Frames | 53 |



## Recess Style



### Pozi / Cross Recess

Standard recess for woodscrews, chipboard screws etc.



### Phillips Recess

Standard recess for self-drilling, drywall and window screws.



### Combi Recess

A combination of a traditional slotted recess with a more common pozi recess.



### TX Drive Recess

High performance recess on C2 Clamp-Fix and TIMCO concrete/masonry screws.



### Square Recess

Recess on square drive pan self-drilling and Solo screws.

## Head Types



### Countersunk

Designed for countersinking into timber for a flush or recessed finish. May have ribs to assist countersinking.



### Double Countersunk

Improved design on the countersunk head to give additional head strength and assist countersinking.



### Double Countersunk with Ribs

Ribs under head to assist with countersinking.



### Shallow Pan Countersunk

A special head design to assist with clamping and countersinking.



### Wafer / Flange / Pancake

Low profile head with a flat underside for applications where a large clamping area and a non-obtrusive finish is required.



### Pan / Round

Head with a flat underside. Designed for application fixing against metal surfaces.



### Hexagon

Positive drive hex head with an integral washer to increase clamping effectiveness.



### Bugle

A curved surface under the head to prevent damage or tearing to the plasterboard paper.



### Socket Button

Designed for a raised finish with a flat underside to aid clamping.



### Socket Cap

An industry standard, requiring a hex key to loosen or tighten.

## Thread Types



### Self-Tapping Thread

A common thread design, mainly used in steel applications (1-5mm).



### Twin Thread

Also known as twin lead threads, they are designed to give a fast insertion time in soft material.



### Coarse Thread (up to 16 TPI)

Also known as spaced threads, they are normally used for all timber applications.



### Fine Thread (over 16 TPI)

Also known as metric threads, they are only used in steel applications. Fine threads are for use with thicker steels (5 - 12mm thickness).



### Serrated Thread

Reduces the torque required to install the fastener as well as assisting with the speed of insertion.



### Hi-Lo Thread

Used in soft timbers, plastics and thin sheet sections. Hi-Lo threads have superior holding power compared to a low TPI coarse thread in these types of material.

## Point Styles



### AB Point

For use in pre-drilled sheet material applications.



### Needle / Gimlet and Super Sharp Point (SS)

Designed for piercing timber, MDF, plastic and light gauge metal up to 0.6mm without pre-drilling.



### B POINT

For use in pre-drilled shallow holes.



### Self-Drill Point

For drilling into metals without the need for pre-drilling.



### C2 Slash

Twin cut for rapid "pick up" and reduced splitting.




### Type 17 Point

Also known as slash point, they are used for fixing timber without the need to pre-drill. The cutting edge helps reduces splitting of the timber.


## Gauge / Diameter

The gauge of the screw is determined by the size of the outside thread diameter.




| Gauge | Metric (mm) |
|-------|-------------|
| 0g    | 1.5         |
| 1g    | 1.9         |
| 2g    | 2.25        |
| 3g    | 2.5         |
| 4g    | 3.0         |
| 5g    | 3.3         |
| 6g    | 3.5         |
| 7g    | 3.9         |
| 8g    | 4.2         |
| 9g    | 4.5         |
| 10g   | 4.8         |
| 12g   | 5.5         |
| 13g   | 6.1         |
| 14g   | 6.3         |
| 15g   | 6.5         |
| 16g   | 6.8         |
| 18g   | 7.5         |
| 20g   | 8.1         |
| 24g   | 9.4         |

## Thread Length

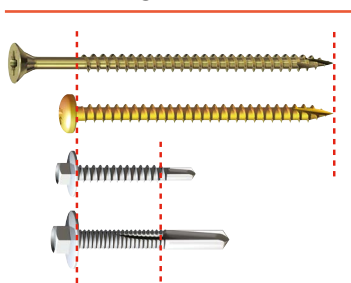

## Threads Per Inch (TPI)

The TPI is the number of thread crests that can be counted within 1" (25.4mm). The coarser the thread the faster the insertion time but lower the holding power.



## Measuring Length

Screws with the following head types are measured from the top of the countersunk to the point of the screw:



Screws with the following head types are measured from the underside of the head to the point of the screw:



## Metric/Imperial Size Comparison Chart

Listed beside the common imperial sizes are the metric equivalents. Also listed are common 'even' approximate metric equivalents in brackets.

| Imperial (inch) | Metric (mm) | Imperial (inch) | Metric (mm)  | Imperial (inch) | Metric (mm)  | Imperial (inch) | Metric (mm)  | Imperial (inch) | Metric (mm)      |
|-----------------|-------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|------------------|
| 1/64"           | 0.40        | 25/64"          | 8.33         | 21/32"          | 16.67        | 31/32"          | 24.61        | 4"              | 101.60 (100)     |
| 1/32"           | 0.79        | 11/32"          | 8.73         | 43/64"          | 17.06        | 63/64"          | 25.00        | 4 1/2"          | 114.30 (115)     |
| 3/64"           | 1.19        | 25/64"          | 9.13         | 17/16"          | 17.46        | 1"              | 25.40 (25.0) | 5"              | 127.00 (125)     |
| 1/16"           | 1.59        | 3/4"            | 9.52 (10.0)  | 7/8"            | 17.86        | 1 1/16"         | 26.99        | 5 1/2"          | 139.70 (140)     |
| 5/64"           | 1.98        | 25/64"          | 9.92         | 25/32"          | 18.26        | 1 1/32"         | 27.78        | 6"              | 152.40 (150)     |
| 3/32"           | 2.38        | 11/32"          | 10.32        | 13/16"          | 18.65        | 1 1/8"          | 28.58 (28.0) | 6 1/2"          | 165.10 (165)     |
| 1/8"            | 2.78        | 25/64"          | 10.72        | 3/4"            | 19.05 (19.0) | 1 1/2"          | 29.37        | 7"              | 177.80 (175)     |
| 1/4"            | 3.17 (3.0)  | 11/16"          | 11.11        | 49/64"          | 19.45        | 1 3/8"          | 30.16 (30.0) | 7 1/2"          | 190.50 (190)     |
| 3/8"            | 3.5         | 25/64"          | 11.51        | 25/32"          | 19.84        | 1 1/2"          | 30.96        | 8"              | 203.20 (200)     |
| 1/2"            | 3.97 (4.0)  | 11/32"          | 11.91        | 13/16"          | 20.24        | 1 3/4"          | 31.75 (32.0) | 8 1/2"          | 215.90 (215)     |
| 5/8"            | 4.5         | 3/4"            | 12.30        | 15/16"          | 20.64        | 1 7/8"          | 38.10 (38.0) | 9"              | 228.60 (230)     |
| 3/4"            | 4.76 (5.0)  | 1/2"            | 12.70 (13.0) | 25/64"          | 21.03        | 2"              | 45.45 (45.0) | 9 1/2"          | 241.30 (240)     |
| 7/8"            | 5.16        | 17/32"          | 13.49        | 25/32"          | 21.43        | 2 1/8"          | 50.80 (50.0) | 10"             | 254.00 (250/255) |
| 1 1/32"         | 5.5         | 25/64"          | 13.89        | 25/32"          | 21.83        | 2 1/4"          | 57.15 (57.0) | 11"             | 279.40 (280)     |
| 1 1/8"          | 5.95        | 3/4"            | 14.29 (14.0) | 7/8"            | 22.23 (22.0) | 2 1/2"          | 63.50 (65.0) | 12"             | 304.80 (305)     |
| 1 1/4"          | 6.35 (6.0)  | 25/64"          | 14.68        | 25/32"          | 22.62        | 2 3/4"          | 69.85 (70.0) | 13"             | 330.20 (330)     |
| 1 3/8"          | 6.75        | 15/32"          | 15.08        | 25/32"          | 23.02        | 3"              | 76.20 (75.0) | 14"             | 355.60 (350/355) |
| 1 1/2"          | 7.14        | 25/64"          | 15.48        | 25/32"          | 23.42        | 3 1/4"          | 82.55 (82.0) | 15"             | 381.00 (380)     |
| 1 3/4"          | 7.54        | 3/4"            | 15.88 (16.0) | 15/16"          | 23.81        | 3 1/2"          | 88.90 (90.0) | 16"             | 406.40 (400/405) |
| 1 5/8"          | 7.94 (8.0)  | 45/64"          | 16.27        | 25/64"          | 24.21        | 3 3/4"          | 95.25 (95.0) | 18"             | 457.20 (455/460) |

## Plating Guide

|                                                                                                                                                                                                             |                                                                                                                                                                                                                                  |                                                                                                                              |                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bright</b> - Polished only.                                                                                                                                                                              | <b>Black Phos.</b> - An immersed black phosphate plating for corrosion resistance and lubrication.                                                                                                                               | <b>Galv.</b> - A post-manufacturing electro-galvanic plating applied to the product.                                         | <b>Mart. SS + Rusp.</b> - A magnetic, martensitic stainless steel with moderate heat resistance, with silver ruspert plating.                                        |
| <b>Zinc (CR3)</b> - A bright Zinc electrolytic plating with a clear toxin free finish. Complies with restrictions of hazardous substances in electrical/electronic equipment (ROHS) directive (2002/95/EC). | <b>Nickel</b> - An electroplated, high lustre, corrosion resistant finish.                                                                                                                                                       | <b>Pre Galv.</b> - A pre-manufacturing electro-galvanic plating applied to the product.                                      | <b>A2 SS</b> - A non-magnetic austenitic stainless steel suitable for many day to day external or corrosive applications offering excellent resistance to corrosion. |
| <b>Yellow</b> - Zinc electrolytic plating and yellow passivated after treatment for enhanced corrosion resistance.                                                                                          | <b>Exterior</b> - A superior organic finish which is environmentally friendly and offers excellent resistance to corrosion in outdoor applications. Exterior includes; nano technology, silver, green, black and white finishes. | <b>FirmaGalv</b> - An electro-galvanic plating.                                                                              | <b>A4 SS</b> - Very similar to the A2 SS but more suitable for extremely corrosive applications, including coastal environments.                                     |
| <b>Black</b> - A zinc electrolytic plating with a black passivation after treatment to enhance corrosion resistance.                                                                                        | <b>Sherardised</b> - A dry galvanised, zinc bonded plating.                                                                                                                                                                      | <b>FirmaGalv+</b> - Similar to the electro-galvanic plating on FirmaGalv. This plating provides better corrosion resistance. |                                                                                                                                                                      |
|                                                                                                                                                                                                             |                                                                                                                                                                                                                                  | <b>Hot Dipped</b> - A galvanised zinc plating which gives excellent corrosion resistance.                                    |                                                                                                                                                                      |

## Corrosion Ratings

|                                        |                                                  |                                                     |                                                          |                                                                 |
|----------------------------------------|--------------------------------------------------|-----------------------------------------------------|----------------------------------------------------------|-----------------------------------------------------------------|
| 1 2 3 4 5                              | 1 2 3 4 5                                        | 1 2 3 4 5                                           | 1 2 3 4 5                                                | 1 2 3 4 5                                                       |
| Clean, dry & low humidity environments | Occasionally damp/wet, rural and sheltered areas | Urban & industrial areas with a low salt atmosphere | Urban & industrial areas with a moderate salt atmosphere | Industrial and coastal areas with an aggressive salt atmosphere |



# c2

## **STRONG-FIX** **PREMIUM SCREW**

### **FOR ALL ROUND FINISHING STRENGTH**



**EXTREME  
PULL-OUT  
RESISTANCE**



**DESIGNED FOR  
SUPERIOR  
HOLD**



**PRECISION  
PZ DRIVE  
PREVENTS  
"CAM-OUT"**

**43%  
QUICKER\***

**52%  
LESS TORQUE\***

THE  
**c2**

**TWIN-CUT**

**1<sup>ST</sup> CUT FOR  
RAPID "PICK-UP"  
AND QUICK  
INSERTION TIME**

**2<sup>ND</sup> CUT HELPS  
PREVENT WOOD  
SPLITTING WHEN  
SCREWING CLOSE  
TO THE EDGE**

\*Compared against a standard woodscrew



### **Precision PZ Drive Recess**

prevents  
'cam-out', giving  
a precise and  
positive drive  
control on  
every screw.

### **Double Countersunk with Ribs**

helps improve  
countersinking, giving a  
smooth and flush finish  
whilst also preventing  
splitting and substrate  
damage.

### **Helix Shank**

helps remove  
debris and  
improve  
clamping.  
(From 100mm  
and above only)



### **Unique Synthetic Lubrication**

reduces insertion torque and  
increases rust protection up  
to 20x longer than a standard  
zinc plating.

### **Dual Angle Thread**

for ultimate performance and  
exceptionally high pull out  
resistance. (Partially threaded from 80mm)



## C2 Strong-Fix Premium Screw

Yellow



TX DRIVE EN 14592:2008



HARD & SOFT WOODS MAN MADE BOARDS



THIN METAL PLASTIC

Using the most modern manufacturing methods and

design techniques, the C2 is a revolutionary high performance multi-purpose screw.

Designed to give ultimate performance in a multitude of materials, the patented twin-cut point gives a consistent and rapid pick-up and reduces timber splitting.

NOTE: Partially threaded from 80mm. Helix from 100mm and above. Twin cut tip on 3.5 gauge from 20mm.

### Industry Boxes



| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>INDUSTRY PACK (1,000 PCS)</b> |           |                 |                |                    |                    |
| 40030C2IND                       | 4.0 x 30  | PZ2             | 1,000          | 12                 | 288                |
| 40040C2IND                       | 4.0 x 40  | PZ2             | 1,000          | 12                 | 288                |
| 40050C2IND                       | 4.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 40060C2IND                       | 4.0 x 60  | PZ2             | 1,000          | 6                  | 144                |
| 40080C2IND                       | 4.0 x 80  | PZ2             | 1,000          | 6                  | 144                |
| 50050C2IND                       | 5.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 50060C2IND                       | 5.0 x 60  | PZ2             | 1,000          | 3                  | 81                 |
| 50070C2IND                       | 5.0 x 70  | PZ2             | 1,000          | 3                  | 81                 |
| 50080C2IND                       | 5.0 x 80  | PZ2             | 1,000          | 3                  | 81                 |
| 50100C2IND                       | 5.0 x 100 | PZ2             | 1,000          | 3                  | 81                 |

CC202

### Boxes



| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 35012C2      | 3.5 x 12  | PZ2             | 200            | 140                | 5040               |
| 35016C2      | 3.5 x 16  | PZ2             | 200            | 140                | 5040               |
| 35020C2      | 3.5 x 20  | PZ2             | 200            | 75                 | 2700               |
| 35025C2      | 3.5 x 25  | PZ2             | 200            | 75                 | 2700               |
| 35030C2      | 3.5 x 30  | PZ2             | 200            | 75                 | 1800               |
| 35040C2      | 3.5 x 40  | PZ2             | 200            | 50                 | 1200               |
| 35050C2      | 3.5 x 50  | PZ2             | 200            | 35                 | 840                |
| 40025C2      | 4.0 x 25  | PZ2             | 200            | 75                 | 1800               |
| 40030C2      | 4.0 x 30  | PZ2             | 200            | 75                 | 1800               |
| 40035C2      | 4.0 x 35  | PZ2             | 200            | 50                 | 1200               |
| 40040C2      | 4.0 x 40  | PZ2             | 200            | 50                 | 1200               |
| 40045C2      | 4.0 x 45  | PZ2             | 200            | 35                 | 840                |
| 40050C2      | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40060C2      | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070C2      | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 40080C2      | 4.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 45030C2      | 4.5 x 30  | PZ2             | 200            | 50                 | 1200               |
| 45040C2      | 4.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 45050C2      | 4.5 x 50  | PZ2             | 200            | 15                 | 540                |
| 45060C2      | 4.5 x 60  | PZ2             | 200            | 15                 | 540                |
| 45070C2      | 4.5 x 70  | PZ2             | 200            | 16                 | 384                |
| 45080C2      | 4.5 x 80  | PZ2             | 200            | 16                 | 384                |
| 50030C2      | 5.0 x 30  | PZ2             | 200            | 50                 | 1200               |
| 50040C2      | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50045C2      | 5.0 x 45  | PZ2             | 200            | 15                 | 540                |
| 50050C2      | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060C2      | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070C2      | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50075C2      | 5.0 x 75  | PZ2             | 200            | 16                 | 384                |
| 50080C2      | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50090C2      | 5.0 x 90  | PZ2             | 100            | 15                 | 540                |
| 50100C2      | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 50120C2      | 5.0 x 120 | PZ2             | 100            | 15                 | 540                |
| 60050C2      | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60060C2      | 6.0 x 60  | PZ3             | 200            | 16                 | 384                |
| 60070C2      | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60080C2      | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60090C2      | 6.0 x 90  | PZ3             | 100            | 15                 | 540                |
| 60100C2      | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60120C2      | 6.0 x 120 | PZ3             | 100            | 16                 | 384                |
| 60130C2      | 6.0 x 130 | PZ3             | 100            | 12                 | 288                |
| 60150C2      | 6.0 x 150 | PZ3             | 100            | 12                 | 288                |
| 60180C2      | 6.0 x 180 | PZ3             | 100            | 8                  | 192                |
| 60200C2      | 6.0 x 200 | PZ3             | 100            | 8                  | 192                |

CC201

### Tubs



x3  
PZ  
38mm  
Power Bit  
Included

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 35025C2TUB                       | 3.5 x 25  | PZ2             | 2,000          | 4                  | 180                |
| 35030C2TUB                       | 3.5 x 30  | PZ2             | 1,800          | 4                  | 180                |
| 40025C2TUB                       | 4.0 x 25  | PZ2             | 1,700          | 4                  | 180                |
| 40030C2TUB                       | 4.0 x 30  | PZ2             | 1,500          | 4                  | 180                |
| 40040C2TUB                       | 4.0 x 40  | PZ2             | 1,200          | 4                  | 180                |
| 40050C2TUB                       | 4.0 x 50  | PZ2             | 800            | 4                  | 180                |
| 40060C2TUB                       | 4.0 x 60  | PZ2             | 600            | 4                  | 180                |
| 40070C2TUB                       | 4.0 x 70  | PZ2             | 500            | 4                  | 180                |
| 45040C2TUB                       | 4.5 x 40  | PZ2             | 1,000          | 4                  | 180                |
| 45050C2TUB                       | 4.5 x 50  | PZ2             | 700            | 4                  | 180                |
| 45080C2TUB                       | 4.5 x 80  | PZ2             | 375            | 4                  | 180                |
| 50040C2TUB                       | 5.0 x 40  | PZ2             | 800            | 4                  | 180                |
| 50050C2TUB                       | 5.0 x 50  | PZ2             | 600            | 4                  | 180                |
| 50060C2TUB                       | 5.0 x 60  | PZ2             | 400            | 4                  | 180                |
| 50070C2TUB                       | 5.0 x 70  | PZ2             | 375            | 4                  | 180                |
| 50080C2TUB                       | 5.0 x 80  | PZ2             | 350            | 4                  | 180                |
| 50090C2TUB                       | 5.0 x 90  | PZ2             | 325            | 4                  | 180                |
| 50100C2TUB                       | 5.0 x 100 | PZ2             | 300            | 4                  | 180                |
| 60100C2TUB                       | 6.0 x 100 | PZ3             | 225            | 4                  | 180                |

CC201

### Industry Tubs



x3  
PZ  
38mm  
Power Bit  
Included

| Product Code                              | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>INDUSTRY TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 50050C2LT                                 | 5.0 x 50  | PZ2             | 1,600          | 64                 |                    |
| 50070C2LT                                 | 5.0 x 70  | PZ2             | 1,200          | 64                 |                    |
| 50080C2LT                                 | 5.0 x 80  | PZ2             | 1,000          | 64                 |                    |
| 50100C2LT                                 | 5.0 x 100 | PZ2             | 800            | 64                 |                    |

CC202

### Grab Pack

A selection of popular C2 Strong-Fix screw sizes in a handy and reusable storage pack with clip-shut lid.



| Product Code               | Size (mm)       | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------|-----------------|-----------------|----------------|--------------------|--------------------|
| <b>GRAB PACK (600 PCS)</b> |                 |                 |                |                    |                    |
| C2GPACK                    | -               | -               | 600            | 5                  | 150                |
|                            | 4.0 x 30        | PZ2             | 140            |                    |                    |
|                            | 4.0 x 40        | PZ2             | 100            |                    |                    |
|                            | 4.0 x 50        | PZ2             | 70             |                    |                    |
|                            | 4.0 x 60        | PZ2             | 60             |                    |                    |
|                            | 5.0 x 40        | PZ2             | 80             |                    |                    |
|                            | 5.0 x 50        | PZ2             | 55             |                    |                    |
|                            | 5.0 x 60        | PZ2             | 45             |                    |                    |
|                            | 5.0 x 70        | PZ2             | 30             |                    |                    |
|                            | 5.0 x 80        | PZ2             | 20             |                    |                    |
|                            | 38mm Power Bits | PZ2             | 3              |                    |                    |

CC201



### Trade Case

The C2 trade case contains 9 of the most popular sizes in a robust portable case.

| Product Code                        | Size (mm)       | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) |
|-------------------------------------|-----------------|-----------------|----------------|--------------------|
| <b>MIXED TRADE CASE (1,800 PCS)</b> |                 |                 |                |                    |
| C2SC                                | -               | -               | 1,798          | 10                 |
|                                     | 3.5 x 16        | PZ2             | 480            |                    |
|                                     | 3.5 x 25        | PZ2             | 350            |                    |
|                                     | 4.0 x 30        | PZ2             | 250            |                    |
|                                     | 4.0 x 40        | PZ2             | 350            |                    |
|                                     | 4.0 x 50        | PZ2             | 100            |                    |
|                                     | 5.0 x 60        | PZ2             | 65             |                    |
|                                     | 5.0 x 70        | PZ2             | 55             |                    |
|                                     | 5.0 x 80        | PZ2             | 100            |                    |
|                                     | 5.0 x 100       | PZ2             | 45             |                    |
|                                     | 38mm Power Bits | PZ2             | 3              |                    |

CC201



# CLAMP-FIX PREMIUM SCREW

## ADVANCED CLAMPING PERFORMANCE



**STOPS THE  
TIMBER  
JACKING  
APART**



**DESIGNED FOR  
SUPERIOR  
HOLD**



**PRECISION  
TX DRIVE  
PREVENTS  
"CAM-OUT"**

**43%  
QUICKER\***

**52%  
LESS TORQUE\***



## TWIN-CUT

**1<sup>ST</sup> CUT FOR  
RAPID "PICK-UP"  
AND QUICK  
INSERTION TIME**

**2<sup>ND</sup> CUT HELPS  
PREVENT WOOD  
SPLITTING WHEN  
SCREWING CLOSE  
TO THE EDGE**

\*Compared against a standard woodscrew



### Precision TX Drive Recess

prevents  
'cam-out', giving  
a precise and  
positive drive  
control on  
every screw.

### Double Countersunk with Ribs

helps improve  
countersinking, giving a  
smooth and flush finish  
whilst also preventing  
splitting and substrate  
damage.

### Partially Threaded Shank with Helix



stops the timber from  
jacking apart, whilst  
helping remove debris.

Partially threaded from 40mm  
Helix shank on 100mm & above

### Unique Synthetic Lubrication

reduces insertion torque and  
increases rust protection up  
to 20x longer than a standard  
zinc plating.

### Dual Angle Thread

for ultimate performance and  
exceptionally high pull out  
resistance.



## C2 Clamp-Fix Premium Screw

### Yellow



TX DRIVE EN 14592:2008



HARD & SOFT  
WOODS

MAN MADE  
BOARDS



THIN METAL

PLASTIC

A premium multi-material screw featuring the award winning C2 twin-cut technology. The dual

angle partial thread and high torque TX drive ensures maximum clamping strength on every fixing.

Designed to prevent the timber from 'jacking' apart when fastening timber to timber. Ideal for applications such as timber studwork, panelling, roof and decking framework.

NOTE: Partially threaded from 40mm and above. Helix shank from 100mm and above.

### Advanced Clamping Performance



Prevents the timber 'jacking' apart

### Boxes



| Product Code | Size (mm) | Max. CFT (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|---------------|-----------------|----------------|--------------------|--------------------|
| BOX          |           |               |                 |                |                    |                    |
| 40025C2C     | 4.0 x 25  | 0             | TX20            | 200            | 75                 | 1,800              |
| 40030C2C     | 4.0 x 30  | 0             | TX20            | 200            | 75                 | 1,800              |
| 40035C2C     | 4.0 x 35  | 0             | TX20            | 200            | 50                 | 1,200              |
| 40040C2C     | 4.0 x 40  | 10            | TX20            | 200            | 50                 | 1,200              |
| 40045C2C     | 4.0 x 45  | 15            | TX20            | 200            | 35                 | 840                |
| 40050C2C     | 4.0 x 50  | 20            | TX20            | 200            | 35                 | 840                |
| 40060C2C     | 4.0 x 60  | 20            | TX20            | 200            | 15                 | 540                |
| 40070C2C     | 4.0 x 70  | 30            | TX20            | 200            | 15                 | 540                |
| 40080C2C     | 4.0 x 80  | 30            | TX20            | 200            | 16                 | 384                |
| 45070C2C     | 4.5 x 70  | 30            | TX25            | 200            | 16                 | 384                |
| 45080C2C     | 4.5 x 80  | 30            | TX25            | 200            | 16                 | 384                |
| 50030C2C     | 5.0 x 30  | 0             | TX25            | 200            | 50                 | 1,200              |
| 50040C2C     | 5.0 x 40  | 10            | TX25            | 200            | 35                 | 840                |
| 50050C2C     | 5.0 x 50  | 20            | TX25            | 200            | 15                 | 540                |
| 50060C2C     | 5.0 x 60  | 20            | TX25            | 200            | 16                 | 384                |
| 50070C2C     | 5.0 x 70  | 30            | TX25            | 200            | 16                 | 384                |
| 50075C2C     | 5.0 x 75  | 35            | TX25            | 200            | 16                 | 384                |
| 50080C2C     | 5.0 x 80  | 30            | TX25            | 200            | 16                 | 384                |
| 50090C2C     | 5.0 x 90  | 30            | TX25            | 100            | 15                 | 540                |
| 50100C2C     | 5.0 x 100 | 40            | TX25            | 100            | 15                 | 540                |
| 60050C2C     | 6.0 x 50  | 20            | TX30            | 200            | 16                 | 384                |
| 60060C2C     | 6.0 x 60  | 20            | TX30            | 200            | 16                 | 384                |
| 60070C2C     | 6.0 x 70  | 30            | TX30            | 200            | 12                 | 288                |
| 60080C2C     | 6.0 x 80  | 30            | TX30            | 200            | 12                 | 288                |
| 60090C2C     | 6.0 x 90  | 30            | TX30            | 100            | 15                 | 540                |
| 60100C2C     | 6.0 x 100 | 30            | TX30            | 100            | 15                 | 540                |
| 60120C2C     | 6.0 x 120 | 50            | TX30            | 100            | 16                 | 384                |
| 60130C2C     | 6.0 x 130 | 60            | TX30            | 100            | 16                 | 384                |
| 60150C2C     | 6.0 x 150 | 80            | TX30            | 100            | 12                 | 324                |
| 60180C2C     | 6.0 x 180 | 110           | TX30            | 100            | 8                  | 216                |
| 60200C2C     | 6.0 x 200 | 130           | TX30            | 100            | 8                  | 216                |
| 80080C2C     | 8.0 x 80  | 40            | TX40            | 100            | 16                 | 384                |
| 80100C2C     | 8.0 x 100 | 20            | TX40            | 100            | 12                 | 288                |
| 80120C2C     | 8.0 x 120 | 40            | TX40            | 50             | 12                 | 288                |
| 80150C2C     | 8.0 x 150 | 70            | TX40            | 50             | 12                 | 288                |
| 80200C2C     | 8.0 x 200 | 120           | TX40            | 50             | 8                  | 216                |
| 80225C2C     | 8.0 x 225 | 145           | TX40            | 50             | 8                  | 216                |
| 80250C2C     | 8.0 x 250 | 170           | TX40            | 50             | 9                  | 216                |
| 80275C2C     | 8.0 x 275 | 195           | TX40            | 25             | 9                  | 216                |
| 80300C2C     | 8.0 x 300 | 220           | TX40            | 25             | 9                  | 216                |
| 80360C2C     | 8.0 x 360 | 280           | TX40            | 25             | 9                  | 270                |
| 80420C2C     | 8.0 x 420 | 340           | TX40            | 25             | 9                  | 270                |

CFT = CLAMPING FIXTURE THICKNESS

CF201

### Tubs



### C2 Impact Power Bit Included

Designed to handle the most demanding impact driving applications with optimum durability and unbeatable break resistance.



**x3  
TX  
38mm  
Power Bit  
Included**

| Product Code              | Size (mm) | Max. CFT (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------|-----------|---------------|-----------------|----------------|--------------------|--------------------|
| TUB (DRIVER BIT INCLUDED) |           |               |                 |                |                    |                    |
| 40040C2CTUB               | 4.0 x 40  | 10            | TX20            | 1,200          | 20                 | 180                |
| 40050C2CTUB               | 4.0 x 50  | 20            | TX20            | 800            | 20                 | 180                |
| 50050C2CTUB               | 5.0 x 50  | 20            | TX25            | 600            | 20                 | 180                |
| 50070C2CTUB               | 5.0 x 70  | 30            | TX25            | 375            | 20                 | 180                |
| 50080C2CTUB               | 5.0 x 80  | 30            | TX25            | 350            | 20                 | 180                |
| 50100C2CTUB               | 5.0 x 100 | 40            | TX25            | 300            | 20                 | 180                |

CFT = CLAMPING FIXTURE THICKNESS

CF201



NEW

# c2

## EXTERIOR STRONG-FIX PREMIUM SCREW

DESIGNED FOR  
OUTDOOR APPLICATIONS

Ideal for: Ironmongery | Decking | Fencing



**EXTREME  
PULL-OUT  
RESISTANCE**



**DESIGNED  
FOR SUPERIOR  
HOLD**



**PRECISION  
PZ DRIVE  
PREVENTS  
"CAM-OUT"**

### Exterior



NEW



PZI



EN 14592:2008

NOTE: Partially threaded from 80mm. Twin cut tip on 3.5 gauge from 20mm. Helix from 100mm and above.

All the features and superior performance of the C2 screw complete with an organic plating for optimal corrosion resistance when used in the harshest of environments. Silver colour to match commonly used ironmongery. Ideal for many general external applications.

- Ribs under head for improved countersinking
- Special plating to give 1,000 hours salt spray resistance
- Multi-layer coating consisting of organic top coat barrier and a zinc base layer
- Dual angle thread for ultimate performance and exceptionally high pull-out resistance
- Patented twin cut technology for rapid "pick-up" and reduces timber splitting



| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 40030C2SBX   | 4.0 x 30  | PZ2             | 200            | 75                 | 1800               |
| 40040C2SBX   | 4.0 x 40  | PZ2             | 200            | 50                 | 1200               |
| 40050C2SBX   | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40060C2SBX   | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070C2SBX   | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 50040C2SBX   | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50050C2SBX   | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060C2SBX   | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070C2SBX   | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50080C2SBX   | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50100C2SBX   | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 60040C2SBX   | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60050C2SBX   | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60070C2SBX   | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60100C2SBX   | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |

### TUB (C2 IMPACT POWER BIT INCLUDED)

|          |           |     |     |    |     |
|----------|-----------|-----|-----|----|-----|
| 40030C2S | 4.0 x 30  | PZ2 | 400 | 12 | 360 |
| 40040C2S | 4.0 x 40  | PZ2 | 350 | 12 | 360 |
| 40050C2S | 4.0 x 50  | PZ2 | 300 | 12 | 360 |
| 40060C2S | 4.0 x 60  | PZ2 | 200 | 12 | 360 |
| 40070C2S | 4.0 x 70  | PZ2 | 170 | 12 | 360 |
| 50040C2S | 5.0 x 40  | PZ2 | 200 | 12 | 360 |
| 50050C2S | 5.0 x 50  | PZ2 | 180 | 12 | 360 |
| 50060C2S | 5.0 x 60  | PZ2 | 150 | 12 | 360 |
| 50070C2S | 5.0 x 70  | PZ2 | 120 | 12 | 360 |
| 50080C2S | 5.0 x 80  | PZ2 | 110 | 12 | 360 |
| 50100C2S | 5.0 x 100 | PZ2 | 80  | 12 | 360 |
| 60040C2S | 6.0 x 40  | PZ3 | 150 | 12 | 360 |
| 60050C2S | 6.0 x 50  | PZ3 | 120 | 12 | 360 |
| 60070C2S | 6.0 x 70  | PZ3 | 90  | 12 | 360 |
| 60100C2S | 6.0 x 100 | PZ3 | 60  | 12 | 360 |

### GRAB PACK (600 PCS)

|                         |          |     |     |   |     |
|-------------------------|----------|-----|-----|---|-----|
| C2SGPACK                | -        | -   | 600 | 5 | 150 |
|                         | 4.0 x 30 | PZ2 | 140 |   |     |
|                         | 4.0 x 40 | PZ2 | 100 |   |     |
|                         | 4.0 x 50 | PZ2 | 70  |   |     |
|                         | 4.0 x 60 | PZ2 | 60  |   |     |
|                         | 5.0 x 40 | PZ2 | 80  |   |     |
|                         | 5.0 x 50 | PZ2 | 55  |   |     |
|                         | 5.0 x 60 | PZ2 | 45  |   |     |
|                         | 5.0 x 70 | PZ2 | 30  |   |     |
|                         | 5.0 x 80 | PZ2 | 20  |   |     |
| Impact 38mm Driver Bits | PZ2      |     | 3   |   |     |



CC205

# c2

## DECK-FIX PREMIUM SCREW

DESIGNED FOR DECKING  
PLATFORMS & EXTERNAL  
TIMBER CONSTRUCTION



**DESIGNED  
FOR SUPERIOR  
CLAMPING WITH  
HELIX TO STOP  
TIMBER JACKING**



**REDUCED  
IMPACT  
RESISTANT  
HEAD FOR A  
CLEAN FINISH**



**PRECISION TX  
DRIVE PREVENTS  
"CAM-OUT"**

### Exterior



TX DRIVE



EN 14592:2008

A premium decking screw using the C2 twin-cut technology.

- Strengthened head to prevent shearing when installed with an impact tool
- Ribs under the head for improved countersinking
- Helix shank for removing debris and to improve clamping
- Coated with a patented multi-layer corrosion resistant plating to withstand 1,000 hours salt spray
- Patented twin cut technology for rapid "pick-up" and reduces timber splitting

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
|--------------|-----------|-----------------|----------------|--------------------|--------------------|

### BOX (DRIVER BIT INCLUDED)

|            |          |      |     |    |     |
|------------|----------|------|-----|----|-----|
| 50C2D250BX | 4.5 x 50 | TX20 | 250 | 15 | 540 |
| 65C2D250BX | 4.5 x 65 | TX20 | 250 | 18 | 432 |
| 75C2D250BX | 4.5 x 75 | TX20 | 250 | 18 | 432 |
| 85C2D250BX | 4.5 x 85 | TX20 | 250 | 18 | 432 |

ID004

### TUB (DRIVER BIT INCLUDED)

|           |          |      |       |   |     |
|-----------|----------|------|-------|---|-----|
| 50C2D250  | 4.5 x 50 | TX20 | 250   | 8 | 288 |
| 65C2D250  | 4.5 x 65 | TX20 | 250   | 8 | 288 |
| 65C2D1000 | 4.5 x 65 | TX20 | 1,000 | 1 | 72  |
| 75C2D250  | 4.5 x 75 | TX20 | 250   | 8 | 216 |

ID004

### TIMBAG

|        |          |      |     |   |     |
|--------|----------|------|-----|---|-----|
| 50C2DB | 4.5 x 50 | TX20 | 175 | 5 | 500 |
| 65C2DB | 4.5 x 65 | TX20 | 145 | 5 | 500 |
| 75C2DB | 4.5 x 75 | TX20 | 120 | 5 | 500 |

BAG01

### INDUSTRY PACK (1,000 PCS)

|          |          |      |       |   |    |
|----------|----------|------|-------|---|----|
| 65C2DIND | 4.5 x 65 | TX20 | 1,000 | 3 | 81 |
|----------|----------|------|-------|---|----|

ID004





**NEW**

# c2

## FLOOR-FIX PREMIUM SCREW

**DESIGNED FOR FIXING  
FLOORBOARDS TO JOISTS**

*Ideal for: Hardwood | Softwood | Man-Made Board*



**DESIGNED  
FOR  
SUPERIOR  
HOLD**



**STOPS THE  
BOARDS  
JACKING**



**PRECISION TX  
DRIVE PREVENTS  
"CAM-OUT"**

**NEW**

# c2

## TONGUE-FIX PREMIUM SCREW

**DESIGNED FOR FIXING  
TONGUE & GROOVE  
FLOORBOARDS & PANNELLING**

*Ideal for: Hardwood | Chipboard | Softwood*



**DESIGNED  
FOR  
SUPERIOR  
HOLD**



**HIDDEN  
FIXING  
SYSTEM**



**PRECISION TX  
DRIVE PREVENTS  
"CAM-OUT"**

**Yellow**





TX DRIVE



EN 14592:2008



HARD & SOFT  
WOODS



MAN MADE  
BOARDS

Designed for use in man-made boards such as MDF and chipboard. The C2 twin-cut tip gives rapid pick up and reduces the likelihood of splitting, whilst the steep head design with finishing teeth and self countersinking ribs ensure a flush finish.

- Specifically designed dual action head - finishing teeth and self-countersinking ribs ensures a flush finish
- Plain shank for pulling the two substrates together without manual clamping
- Coated with a high-molecular polymer lubricant that reduces the insertion torque by up to 52% and increases rust protection up to 20 times longer than a standard zinc plating
- Dual angle thread for ultimate performance and exceptionally high pull-out resistance
- Patented twin cut technology for rapid "pick-up" and reduces timber splitting



**NEW**

| Product Code                              | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (C2 IMPACT POWER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 42055C2MDFBX                              | 4.2 x 55  | TX20            | 200            | 15                 | 540                |
| CC204                                     |           |                 |                |                    |                    |
| <b>TUB (C2 IMPACT POWER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 42055C2MDF                                | 4.2 x 55  | TX20            | 250            | 12                 | 360                |
| CC204                                     |           |                 |                |                    |                    |

**Yellow**





TX DRIVE



EN 14592:2008



HARD & SOFT  
WOODS



MAN MADE  
BOARDS

Specially designed for attaching tongue and groove floorboards and panelling. Provides a secure hidden fixture without causing damage, allowing a flush fit with the next board.

- Reduced head for concealed countersinking
- Plain shank for pulling the two substrates together without manual clamping
- Coated with a high-molecular polymer lubricant that reduces the insertion torque by up to 52% and increases rust protection up to 20 times longer than a standard zinc plating
- Dual angle thread for ultimate performance and exceptionally high pull-out resistance
- Patented twin cut technology for rapid "pick-up" and reduces timber splitting



**NEW**

| Product Code                              | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (C2 IMPACT POWER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 35045C2TGBX                               | 3.5 x 45  | TX10            | 200            | 50                 | 1200               |
| CC203                                     |           |                 |                |                    |                    |
| <b>TUB (C2 IMPACT POWER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 35045C2TG                                 | 3.5 x 45  | TX10            | 350            | 20                 | 600                |
| CC203                                     |           |                 |                |                    |                    |

# VELOCITY

## Premium Multi-Use Screw

### FOR ALL ROUND DRIVE & CLAMPING PERFORMANCE

The unique patented TIMCO Velocity screw has been specifically designed to give rapid installation into many different materials whilst achieving exceptional pull out resistance.

The Velocity screw is designed and manufactured using the most advanced technology giving the user a consistent and reliable product that can be used in a variety of applications.

**For: Wood | Man-Made Board | Thin Metal | Plastic**



**Dual Angle Thread**  
Designed For Superior Hold



**Partially Threaded**  
Stops The Timber Jacking



**Rapid Drive Twist Cut**  
Enhances Drive Performance



Pozi

#### Corrosion Rating

**2**

Occasionally damp/wet, rural and sheltered areas.

Available in:

**Yellow**



#### Double countersunk with ribs

Helps improve countersinking, giving a smooth and flush finish whilst also preventing splitting and substrate damage.

#### Superior corrosion resistance

Special plating to give over 504 hours salt spray resistance in accordance to BS EN 9227:2012.

#### Partially threaded from 40mm

To assist clamping of material.

#### Anti-friction lubrication

Lubricated with XXS5 to enhance screw insertion time and reduce driving torque.

#### Dual angle thread

Designed for superior hold.

#### Twist cut thread

To give rapid drive & performance.

#### Single slash tip from 25mm

Helps prevent the timber splitting when screwing close to the edge, whilst also helping to reduce torque.



## Velocity Premium Multi-Use Screw - Pozi

Yellow



POZI



EN 14592:2008



HARD & SOFT  
WOODS



MAN MADE  
BOARDS



THIN METAL



PLASTIC

### Industry Boxes



| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>INDUSTRY PACK (1,000 PCS)</b> |           |                 |                |                    |                    |
| 40030VYIND                       | 4.0 x 30  | PZ2             | 1,000          | 12                 | 288                |
| 40040VYIND                       | 4.0 x 40  | PZ2             | 1,000          | 12                 | 288                |
| 40050VYIND                       | 4.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 50040VYIND                       | 5.0 x 40  | PZ2             | 1,000          | 6                  | 144                |
| 50050VYIND                       | 5.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 50060VYIND                       | 5.0 x 60  | PZ2             | 1,000          | 3                  | 81                 |
| 50070VYIND                       | 5.0 x 70  | PZ2             | 1,000          | 3                  | 81                 |
| 50080VYIND                       | 5.0 x 80  | PZ2             | 1,000          | 3                  | 81                 |
| 50090VYIND                       | 5.0 x 90  | PZ2             | 1,000          | 3                  | 81                 |
| 50100VYIND                       | 5.0 x 100 | PZ2             | 1,000          | 3                  | 81                 |

VEL01

### Boxes



| Product Code | Size (mm) | Thread Length (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|--------------------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                    |                 |                |                    |                    |
| 30016VY      | 3.0 x 16  | 16                 | PZ1             | 200            | 140                | 5,040              |
| 30020VY      | 3.0 x 20  | 20                 | PZ1             | 200            | 140                | 5,040              |
| 30030VY      | 3.0 x 30  | 30                 | PZ1             | 200            | 75                 | 2,700              |
| 30040VY      | 3.0 x 40  | 40                 | PZ1             | 200            | 50                 | 1,200              |
| 35012VY      | 3.5 x 12  | 12                 | PZ2             | 200            | 140                | 5,040              |
| 35016VY      | 3.5 x 16  | 16                 | PZ2             | 200            | 140                | 5,040              |
| 35020VY      | 3.5 x 20  | 20                 | PZ2             | 200            | 75                 | 2,700              |
| 35025VY      | 3.5 x 25  | 25                 | PZ2             | 200            | 75                 | 2,700              |
| 35030VY      | 3.5 x 30  | 30                 | PZ2             | 200            | 75                 | 1,800              |
| 35035VY      | 3.5 x 35  | 35                 | PZ2             | 200            | 50                 | 1,200              |
| 35040VY      | 3.5 x 40  | 30                 | PZ2             | 200            | 50                 | 1,200              |
| 35045VY      | 3.5 x 45  | 30                 | PZ2             | 200            | 35                 | 840                |
| 35050VY      | 3.5 x 50  | 30                 | PZ2             | 200            | 35                 | 840                |
| 40016VY      | 4.0 x 16  | 16                 | PZ2             | 200            | 75                 | 2,700              |
| 40020VY      | 4.0 x 20  | 20                 | PZ2             | 200            | 75                 | 2,700              |
| 40025VY      | 4.0 x 25  | 25                 | PZ2             | 200            | 75                 | 1,800              |
| 40030VY      | 4.0 x 30  | 30                 | PZ2             | 200            | 75                 | 1,800              |
| 40035VY      | 4.0 x 35  | 35                 | PZ2             | 200            | 50                 | 1,200              |
| 40040VY      | 4.0 x 40  | 30                 | PZ2             | 200            | 50                 | 1,200              |
| 40045VY      | 4.0 x 45  | 30                 | PZ2             | 200            | 35                 | 840                |
| 40050VY      | 4.0 x 50  | 30                 | PZ2             | 200            | 35                 | 840                |
| 40060VY      | 4.0 x 60  | 40                 | PZ2             | 200            | 15                 | 540                |
| 40070VY      | 4.0 x 70  | 40                 | PZ2             | 200            | 15                 | 540                |
| 40080VY      | 4.0 x 80  | 50                 | PZ2             | 200            | 16                 | 384                |
| 45030VY      | 4.5 x 30  | 30                 | PZ2             | 200            | 50                 | 1,200              |
| 45040VY      | 4.5 x 40  | 30                 | PZ2             | 200            | 35                 | 840                |
| 45050VY      | 4.5 x 50  | 30                 | PZ2             | 200            | 15                 | 540                |
| 45060VY      | 4.5 x 60  | 40                 | PZ2             | 200            | 15                 | 540                |
| 45070VY      | 4.5 x 70  | 40                 | PZ2             | 200            | 16                 | 384                |
| 45080VY      | 4.5 x 80  | 50                 | PZ2             | 200            | 16                 | 384                |
| 50030VY      | 5.0 x 30  | 30                 | PZ2             | 200            | 50                 | 1,056              |
| 50040VY      | 5.0 x 40  | 30                 | PZ2             | 200            | 35                 | 840                |
| 50045VY      | 5.0 x 45  | 30                 | PZ2             | 200            | 15                 | 540                |
| 50050VY      | 5.0 x 50  | 30                 | PZ2             | 200            | 15                 | 540                |
| 50060VY      | 5.0 x 60  | 40                 | PZ2             | 200            | 16                 | 384                |
| 50070VY      | 5.0 x 70  | 40                 | PZ2             | 200            | 16                 | 384                |
| 50075VY      | 5.0 x 75  | 40                 | PZ2             | 200            | 16                 | 384                |
| 50080VY      | 5.0 x 80  | 50                 | PZ2             | 200            | 16                 | 384                |
| 50090VY      | 5.0 x 90  | 60                 | PZ2             | 200            | 15                 | 540                |
| 50100VY      | 5.0 x 100 | 60                 | PZ2             | 200            | 15                 | 540                |
| 60040VY      | 6.0 x 40  | 30                 | PZ3             | 200            | 15                 | 540                |
| 60045VY      | 6.0 x 45  | 30                 | PZ3             | 200            | 15                 | 540                |
| 60050VY      | 6.0 x 50  | 30                 | PZ3             | 200            | 16                 | 384                |
| 60060VY      | 6.0 x 60  | 40                 | PZ3             | 200            | 16                 | 384                |
| 60070VY      | 6.0 x 70  | 40                 | PZ3             | 200            | 12                 | 288                |
| 60080VY      | 6.0 x 80  | 50                 | PZ3             | 200            | 12                 | 288                |
| 60090VY      | 6.0 x 90  | 60                 | PZ3             | 100            | 15                 | 540                |
| 60100VY      | 6.0 x 100 | 70                 | PZ3             | 100            | 15                 | 540                |
| 60120VY      | 6.0 x 120 | 70                 | PZ3             | 100            | 16                 | 384                |
| 60130VY      | 6.0 x 130 | 70                 | PZ3             | 100            | 12                 | 384                |
| 60150VY      | 6.0 x 150 | 70                 | PZ3             | 100            | 12                 | 324                |
| 60180VY      | 6.0 x 180 | 70                 | PZ3             | 100            | 8                  | 192                |
| 60200VY      | 6.0 x 200 | 70                 | PZ3             | 100            | 8                  | 192                |

VEL01

### Tubs



| Product Code                     | Size (mm) | TL (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|---------|-----------------|----------------|--------------------|--------------------|
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |         |                 |                |                    |                    |
| 40030VYTUB                       | 4.0 x 30  | 30      | PZ2             | 1,500          | 4                  | 180                |
| 40040VYTUB                       | 4.0 x 40  | 30      | PZ2             | 1,200          | 4                  | 180                |
| 40050VYTUB                       | 4.0 x 50  | 30      | PZ2             | 800            | 4                  | 180                |
| 50040VYTUB                       | 5.0 x 40  | 30      | PZ2             | 800            | 4                  | 180                |
| 50050VYTUB                       | 5.0 x 50  | 30      | PZ2             | 600            | 4                  | 180                |
| 50060VYTUB                       | 5.0 x 60  | 40      | PZ2             | 400            | 4                  | 180                |
| 50070VYTUB                       | 5.0 x 70  | 40      | PZ2             | 375            | 4                  | 180                |
| 50080VYTUB                       | 5.0 x 80  | 50      | PZ2             | 350            | 4                  | 180                |
| 50090VYTUB                       | 5.0 x 90  | 60      | PZ2             | 325            | 4                  | 180                |
| 50100VYTUB                       | 5.0 x 100 | 60      | PZ2             | 300            | 4                  | 180                |

TL = THREAD LENGTH

VEL02

### Grab Pack

A selection of popular Velocity screw sizes in a handy and reusable storage pack with clip-shut lid.



| Product Code               | Size (mm)        | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------|------------------|-----------------|----------------|--------------------|--------------------|
| <b>GRAB PACK (600 PCS)</b> |                  |                 |                |                    |                    |
| VYGPACK                    | -                | -               | 600            | 5                  | 150                |
|                            | 4.0 x 30         | PZ2             | 140            |                    |                    |
|                            | 4.0 x 40         | PZ2             | 100            |                    |                    |
|                            | 4.0 x 50         | PZ2             | 70             |                    |                    |
|                            | 4.0 x 60         | PZ2             | 60             |                    |                    |
|                            | 5.0 x 40         | PZ2             | 80             |                    |                    |
|                            | 5.0 x 50         | PZ2             | 55             |                    |                    |
|                            | 5.0 x 60         | PZ2             | 45             |                    |                    |
|                            | 5.0 x 70         | PZ2             | 30             |                    |                    |
|                            | 5.0 x 80         | PZ2             | 20             |                    |                    |
|                            | 25mm Driver Bits | PZ2             | 1              |                    |                    |

VEL01

# CLASS/C®

## MULTI-PURPOSE SCREWS

### Exceptional Reliability & Strength

The TIMCO Multi-Purpose Classic Screw enables the user to rely on one product for a variety of applications.

Specifically designed as a multi-purpose product, the 25° sharp point, special thread design, lubrication and corrosion resistant plating ensures the screw will consistently perform efficiently in hardwood, chipboard, MDF, plastic and thin sheet metal, while offering exceptional holding power.



Pozi

#### Corrosion Rating

2

Occasionally damp/wet, rural and sheltered areas.

Available in:

Yellow

Black

Nickel

A2 Stainless

A4 Stainless

Countersunk  
Head



Pan  
Head



Reduced  
Head  
(Hinge)



#### Double Countersunk

Reduces the likelihood of head shear and assists completion of countersinking.

#### Fully Threaded up to and including 75mm

Partially threaded thereafter (with 70mm thread length).

#### Molecular Lubrication

Patented lubrication, designed to enhance screw insertion time and provides greater resistance to corrosion.

#### 40° Deep Single Thread

To provide a secure fixing with high pull-out resistance.


#### Surface Hardened

Up to 750 HV to prevent torque shearing under load and a core hardness of up to 450 HV for improved ductility.

#### Type 17 Single Slash

\*Single slash on 25mm

To reduce torque and the likelihood of the timber splitting when the screw is inserted close to the edge.

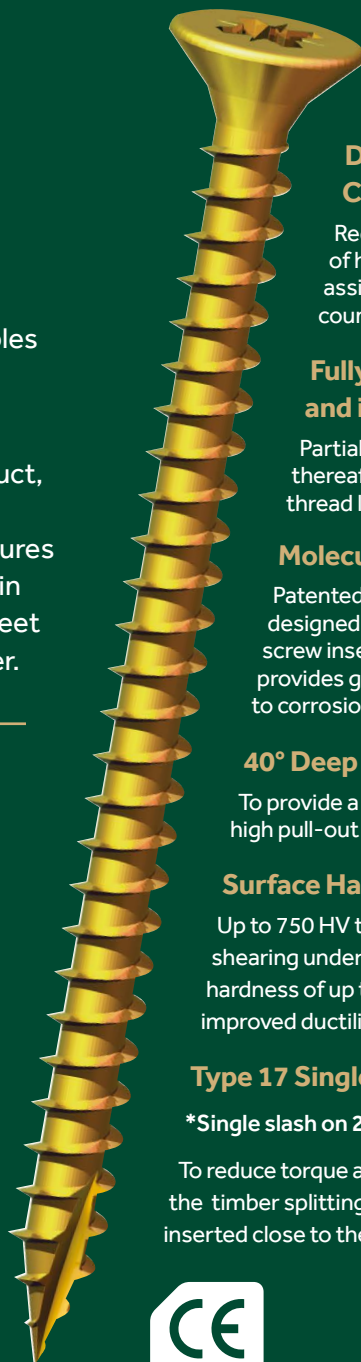



## Classic Multi-Purpose Screw - Double Countersunk

Yellow



POZI



EN 14592:2008



HARD & SOFT  
WOODS



MAN MADE  
BOARDS



THIN METAL



PLASTIC

NOTE: Partially threaded from 80mm. Single slash from 25mm.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 30012CLAF    | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30016CLAF    | 3.0 x 16  | PZ1             | 200            | 140                | 5,040              |
| 30020CLAF    | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |
| 30025CLAF    | 3.0 x 25  | PZ1             | 200            | 75                 | 2,700              |
| 30030CLAF    | 3.0 x 30  | PZ1             | 200            | 75                 | 2,700              |
| 30035CLAF    | 3.0 x 35  | PZ1             | 200            | 50                 | 1,200              |
| 30040CLAF    | 3.0 x 40  | PZ1             | 200            | 50                 | 1,200              |
| 35012CLAF    | 3.5 x 12  | PZ2             | 200            | 140                | 5,040              |
| 35016CLAF    | 3.5 x 16  | PZ2             | 200            | 140                | 5,040              |
| 35020CLAF    | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025CLAF    | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 35030CLAF    | 3.5 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 35035CLAF    | 3.5 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 35040CLAF    | 3.5 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 35045CLAF    | 3.5 x 45  | PZ2             | 200            | 35                 | 840                |
| 35050CLAF    | 3.5 x 50  | PZ2             | 200            | 35                 | 840                |
| 40012CLAF    | 4.0 x 12  | PZ2             | 200            | 140                | 5,040              |
| 40016CLAF    | 4.0 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 40020CLAF    | 4.0 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 40025CLAF    | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLAF    | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |

CLA01

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 40035CLAF    | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040CLAF    | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40045CLAF    | 4.0 x 45  | PZ2             | 200            | 35                 | 840                |
| 40050CLAF    | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40055CLAF    | 4.0 x 55  | PZ2             | 200            | 15                 | 540                |
| 40060CLAF    | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070CLAF    | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 40080CLAF    | 4.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 45016CLAF    | 4.5 x 16  | PZ2             | 200            | 75                 | 1,800              |
| 45020CLAF    | 4.5 x 20  | PZ2             | 200            | 75                 | 1,800              |
| 45025CLAF    | 4.5 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 45030CLAF    | 4.5 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 45035CLAF    | 4.5 x 35  | PZ2             | 200            | 35                 | 840                |
| 45040CLAF    | 4.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 45045CLAF    | 4.5 x 45  | PZ2             | 200            | 35                 | 840                |
| 45050CLAF    | 4.5 x 50  | PZ2             | 200            | 15                 | 540                |
| 45055CLAF    | 4.5 x 55  | PZ2             | 200            | 15                 | 540                |
| 45060CLAF    | 4.5 x 60  | PZ2             | 200            | 15                 | 540                |
| 45070CLAF    | 4.5 x 70  | PZ2             | 200            | 16                 | 384                |
| 45080CLAF    | 4.5 x 80  | PZ2             | 200            | 16                 | 384                |
| 50020CLAF    | 5.0 x 20  | PZ2             | 200            | 50                 | 1,200              |
| 50025CLAF    | 5.0 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 50030CLAF    | 5.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 50035CLAF    | 5.0 x 35  | PZ2             | 200            | 35                 | 840                |
| 50040CLAF    | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50045CLAF    | 5.0 x 45  | PZ2             | 200            | 15                 | 540                |
| 50050CLAF    | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50055CLAF    | 5.0 x 55  | PZ2             | 200            | 15                 | 540                |
| 50060CLAF    | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070CLAF    | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50075CLAF    | 5.0 x 75  | PZ2             | 200            | 16                 | 384                |
| 50080CLAF    | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50090CLAF    | 5.0 x 90  | PZ2             | 100            | 15                 | 540                |
| 50100CLAF    | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 50120CLAF    | 5.0 x 120 | PZ2             | 100            | 15                 | 540                |
| 60040CLAF    | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60045CLAF    | 6.0 x 45  | PZ3             | 200            | 15                 | 540                |
| 60050CLAF    | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60060CLAF    | 6.0 x 60  | PZ3             | 200            | 16                 | 384                |
| 60070CLAF    | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60080CLAF    | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60090CLAF    | 6.0 x 90  | PZ3             | 100            | 15                 | 540                |
| 60100CLAF    | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60120CLAF    | 6.0 x 120 | PZ3             | 100            | 16                 | 384                |
| 60130CLAF    | 6.0 x 130 | PZ3             | 100            | 12                 | 288                |
| 60150CLAF    | 6.0 x 150 | PZ3             | 100            | 12                 | 288                |
| 60180CLAF    | 6.0 x 180 | PZ3             | 100            | 8                  | 192                |
| 60200CLAF    | 6.0 x 200 | PZ3             | 100            | 8                  | 192                |

CLA01

## Classic Multi-Purpose Screw - Pan Head

Yellow



POZI



EN 14592:2008



HARD & SOFT  
WOODS



MAN MADE  
BOARDS



THIN METAL



PLASTIC

NOTE: Single slash from 25mm.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 35012CLAP    | 3.5 x 12  | PZ2             | 200            | 140                | 5,040              |
| 35016CLAP    | 3.5 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 35020CLAP    | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025CLAP    | 3.5 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40016CLAP    | 4.0 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 40020CLAP    | 4.0 x 20  | PZ2             | 200            | 75                 | 1,800              |
| 40025CLAP    | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLAP    | 4.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 40035CLAP    | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040CLAP    | 4.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 40050CLAP    | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 50030CLAP    | 5.0 x 30  | PZ2             | 200            | 35                 | 840                |
| 50050CLAP    | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |

CLA01

## Mixed Tray

The Classic screw mixed tray contains 12 of the most popular sizes.



| Product Code                | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>MIXED TRAY (895 PCS)</b> |           |                 |                |                    |                    |
| CLASSICTRAY                 | -         | -               | 895            | 6                  | 108                |
|                             | 3.5 x 16  | PZ2             | 200            |                    |                    |
|                             | 3.5 x 25  | PZ2             | 100            |                    |                    |
|                             | 3.5 x 30  | PZ2             | 100            |                    |                    |
|                             | 4.0 x 20  | PZ2             | 100            |                    |                    |
|                             | 4.0 x 25  | PZ2             | 60             |                    |                    |
|                             | 4.0 x 30  | PZ2             | 50             |                    |                    |
|                             | 4.0 x 40  | PZ2             | 70             |                    |                    |
|                             | 4.0 x 50  | PZ2             | 60             |                    |                    |
|                             | 4.0 x 60  | PZ2             | 50             |                    |                    |
|                             | 5.0 x 40  | PZ2             | 30             |                    |                    |
|                             | 5.0 x 50  | PZ2             | 40             |                    |                    |
|                             | 5.0 x 60  | PZ2             | 35             |                    |                    |

CLA01

## Classic Multi-Purpose Screw - Double Countersunk

### A2 Stainless Steel



POZI EN 14592:2008



HARD & SOFT WOODS



THIN METAL



MAN MADE BOARDS

NOTE: Partially threaded from 80mm. Single slash from 25mm.

**Superior  
Corrosion  
Resistance!**

Please note a pilot hole is recommended for all stainless steel screws.

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|
| <b>TIMPAC</b> |           |                 |                |                    |
| 35030CHSSP    | 3.5 x 30  | PZ2             | 30             | 10                 |
| 40025CHSSP    | 4.0 x 25  | PZ2             | 25             | 10                 |
| 40030CHSSP    | 4.0 x 30  | PZ2             | 20             | 10                 |
| 40040CHSSP    | 4.0 x 40  | PZ2             | 15             | 10                 |
| 40050CHSSP    | 4.0 x 50  | PZ2             | 14             | 10                 |
| 50030CHSSP    | 5.0 x 30  | PZ2             | 10             | 10                 |
| 50040CHSSP    | 5.0 x 40  | PZ2             | 10             | 10                 |
| 50050CHSSP    | 5.0 x 50  | PZ2             | 10             | 10                 |
| 50060CHSSP    | 5.0 x 60  | PZ2             | 8              | 10                 |
| 50070CHSSP    | 5.0 x 70  | PZ2             | 7              | 10                 |
| 50080CHSSP    | 5.0 x 80  | PZ2             | 6              | 10                 |
| 50100CHSSP    | 5.0 x 100 | PZ2             | 4              | 10                 |

PAK01

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 30012CLASS   | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30016CLASS   | 3.0 x 16  | PZ1             | 200            | 140                | 5,040              |
| 30020CLASS   | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |
| 30025CLASS   | 3.0 x 25  | PZ1             | 200            | 75                 | 2,700              |
| 35012CLASS   | 3.5 x 12  | PZ2             | 200            | 140                | 5,040              |
| 35016CLASS   | 3.5 x 16  | PZ2             | 200            | 140                | 5,040              |
| 35020CLASS   | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025CLASS   | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 35030CLASS   | 3.5 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 35035CLASS   | 3.5 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 35040CLASS   | 3.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 35050CLASS   | 3.5 x 50  | PZ2             | 200            | 35                 | 840                |
| 40016CLASS   | 4.0 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 40020CLASS   | 4.0 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 40025CLASS   | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLASS   | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40035CLASS   | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040CLASS   | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40045CLASS   | 4.0 x 45  | PZ2             | 200            | 35                 | 840                |
| 40050CLASS   | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40060CLASS   | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070CLASS   | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 45025CLASS   | 4.5 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 45030CLASS   | 4.5 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 45040CLASS   | 4.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 45050CLASS   | 4.5 x 50  | PZ2             | 200            | 15                 | 540                |
| 45060CLASS   | 4.5 x 60  | PZ2             | 200            | 15                 | 540                |
| 50025CLASS   | 5.0 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 50030CLASS   | 5.0 x 30  | PZ2             | 200            | 35                 | 1,200              |
| 50035CLASS   | 5.0 x 35  | PZ2             | 200            | 35                 | 840                |
| 50040CLASS   | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50050CLASS   | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060CLASS   | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070CLASS   | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50080CLASS   | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50090CLASS   | 5.0 x 90  | PZ2             | 100            | 15                 | 540                |
| 50100CLASS   | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 60040CLASS   | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60050CLASS   | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60060CLASS   | 6.0 x 60  | PZ3             | 200            | 16                 | 384                |
| 60070CLASS   | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60080CLASS   | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60100CLASS   | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60130CLASS   | 6.0 x 130 | PZ3             | 100            | 12                 | 384                |
| 60150CLASS   | 6.0 x 150 | PZ3             | 100            | 12                 | 288                |

CSS01

## Classic Multi-Purpose Screw - Pan Head


### A2 Stainless Steel



POZI EN 14592:2008



HARD & SOFT WOODS



THIN METAL



MAN MADE BOARDS

NOTE: Single slash from 25mm.

**Superior  
Corrosion  
Resistance!**


Please note a pilot hole is recommended for all stainless steel screws.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 35016CLAPSS  | 3.5 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 35020CLAPSS  | 3.5 x 20  | PZ2             | 200            | 75                 | 1,800              |
| 35025CLAPSS  | 3.5 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 35030CLAPSS  | 3.5 x 30  | PZ2             | 200            | 50                 | 1,800              |
| 40020CLAPSS  | 4.0 x 20  | PZ2             | 200            | 75                 | 1,800              |
| 40025CLAPSS  | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLAPSS  | 4.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 40040CLAPSS  | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40050CLAPSS  | 4.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50025CLAPSS  | 5.0 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 50030CLAPSS  | 5.0 x 30  | PZ2             | 200            | 35                 | 840                |
| 50040CLAPSS  | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50050CLAPSS  | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 60040CLAPSS  | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60050CLAPSS  | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |

CSS01

## Mixed Tray

The Classic stainless steel screw mixed tray contains 12 of the most popular sizes.

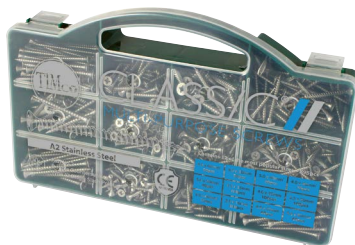

| Product Code                | Size (mm) | Driver Bit Size | Screw Qty (pcs) | Pack Qty (pcs) | Pallet Qty (packs) |
|-----------------------------|-----------|-----------------|-----------------|----------------|--------------------|
| <b>MIXED TRAY (895 PCS)</b> |           |                 |                 |                |                    |
| STSTTRAY                    | -         | -               | -               | 6              | 108                |
|                             | 3.5 x 16  | PZ2             | 200             |                |                    |
|                             | 3.5 x 25  | PZ2             | 100             |                |                    |
|                             | 3.5 x 30  | PZ2             | 100             |                |                    |
|                             | 4.0 x 20  | PZ2             | 100             |                |                    |
|                             | 4.0 x 25  | PZ2             | 60              |                |                    |
|                             | 4.0 x 30  | PZ2             | 50              |                |                    |
|                             | 4.0 x 40  | PZ2             | 70              |                |                    |
|                             | 4.0 x 50  | PZ2             | 60              |                |                    |
|                             | 4.0 x 60  | PZ2             | 50              |                |                    |
|                             | 5.0 x 40  | PZ2             | 30              |                |                    |
|                             | 5.0 x 50  | PZ2             | 40              |                |                    |
|                             | 5.0 x 60  | PZ2             | 35              |                |                    |


CSS01

## Collated Screws

Available in:

**A2 Stainless Steel**

Page  
**39**

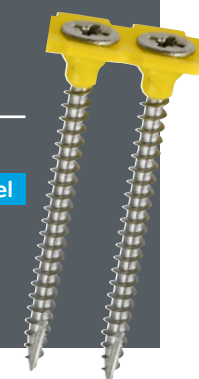

## Classic Multi-Purpose Screw - Double Countersunk

### A4 Stainless Steel



POZI

EN 14592:2008



HARD & SOFT  
WOODS

MAN MADE  
BOARDS



THIN METAL

PLASTIC

NOTE: Partially threaded from 80mm. Single slash from 25mm.



| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 30016CLA4    | 3.0 x 16  | PZ1             | 200            | 140                | 5,040              |
| 35020CLA4    | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025CLA4    | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 35030CLA4    | 3.5 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40025CLA4    | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLA4    | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40035CLA4    | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040CLA4    | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40050CLA4    | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40060CLA4    | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070CLA4    | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 50030CLA4    | 5.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 50040CLA4    | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50050CLA4    | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060CLA4    | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070CLA4    | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50080CLA4    | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50100CLA4    | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 60080CLA4    | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60100CLA4    | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60130CLA4    | 6.0 x 130 | PZ3             | 100            | 16                 | 288                |
| 60150CLA4    | 6.0 x 150 | PZ3             | 100            | 12                 | 288                |

CSS02

## Classic Multi-Purpose Screw - Double Countersunk

### Exterior (Black Organic)



POZI

EN 14592:2008



HARD & SOFT  
WOODS

MAN MADE  
BOARDS



THIN METAL

PLASTIC

NOTE: Single slash from 25mm.



| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 35016CLAB    | 3.5 x 16  | PZ2             | 200            | 140                | 5,040              |
| 35025CLAB    | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 40025CLAB    | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030CLAB    | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40040CLAB    | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 50030CLAB    | 5.0 x 30  | PZ2             | 200            | 35                 | 840                |
| 50040CLAB    | 5.0 x 40  | PZ2             | 200            | 15                 | 540                |

CLA04



### Yellow



### Nickel



POZI

EN 14592:2008

Reduced 5mm head for specific use in continuous/piano hinges.

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |           |                 |                |                    |                    |
| <b>Yellow</b> |           |                 |                |                    |                    |
| 30012CLAH     | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30016CLAH     | 3.0 x 16  | PZ1             | 200            | 140                | 5,040              |
| 30020CLAH     | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |
| 30025CLAH     | 3.0 x 25  | PZ1             | 200            | 75                 | 2,700              |

CLA01

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |           |                 |                |                    |                    |
| <b>Nickel</b> |           |                 |                |                    |                    |
| 30012CLAHN    | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30016CLAHN    | 3.0 x 16  | PZ1             | 200            | 140                | 5,040              |
| 30020CLAHN    | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |

CLA03

# Solo Woodscrews

**Ideal for:**  
Softwood  
Chipboard  
Plastic  
and some  
hardwoods

## For general applications

An economic single thread woodscrew designed to be consistently reliable in softwood, chipboard, plastic and some hardwoods.

The Solo range is an ideal fixing for today's tradesman when fixing into low density substrates.



Pozi



Square

### Corrosion Rating

**1**

Clean, dry &  
low humidity  
environments

Available in:

**Yellow**

**Zinc**

Double  
Countersunk



Pan  
Head



### Double Countersunk

Reduces the likelihood of head shear and assists completion of countersinking.

### Fully Threaded up to and including 75mm

Partially threaded thereafter (with 70mm thread length).

### Wax Lubricated

To enhance screw insertion time, reduced driving torque and resistance to corrosion.

### 40° Deep Single Thread

To provide a secure fixing with high pull-out resistance.

### 25° Sharp Point

Sharp point and single lead for a fast start and improved thread acceptance.





## Solo - Double Countersunk

### Yellow



SOFTWOOD

CHIPBOARD



Boxes

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 30012SOLOC   | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30015SOLOC   | 3.0 x 15  | PZ1             | 200            | 140                | 5,040              |
| 30017SOLOC   | 3.0 x 17  | PZ1             | 200            | 140                | 5,040              |
| 30020SOLOC   | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |
| 30025SOLOC   | 3.0 x 25  | PZ1             | 200            | 75                 | 2,700              |
| 30030SOLOC   | 3.0 x 30  | PZ1             | 200            | 75                 | 2,700              |
| 35012SOLOC   | 3.5 x 12  | PZ2             | 200            | 140                | 5,040              |
| 35015SOLOC   | 3.5 x 15  | PZ2             | 200            | 140                | 5,040              |
| 35017SOLOC   | 3.5 x 17  | PZ2             | 200            | 140                | 5,040              |
| 35020SOLOC   | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025SOLOC   | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 35030SOLOC   | 3.5 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 35035SOLOC   | 3.5 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 35040SOLOC   | 3.5 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 35050SOLOC   | 3.5 x 50  | PZ2             | 200            | 35                 | 840                |
| 40015SOLOC   | 4.0 x 15  | PZ2             | 200            | 75                 | 2,700              |
| 40017SOLOC   | 4.0 x 17  | PZ2             | 200            | 75                 | 2,700              |
| 40020SOLOC   | 4.0 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 40025SOLOC   | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030SOLOC   | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40035SOLOC   | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040SOLOC   | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40045SOLOC   | 4.0 x 45  | PZ2             | 200            | 35                 | 840                |
| 40050SOLOC   | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |
| 40060SOLOC   | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070SOLOC   | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 40080SOLOC   | 4.0 x 80  | PZ2             | 200            | 15                 | 540                |
| 45020SOLOC   | 4.5 x 20  | PZ2             | 200            | 75                 | 1,800              |
| 45030SOLOC   | 4.5 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 45035SOLOC   | 4.5 x 35  | PZ2             | 200            | 35                 | 840                |
| 45040SOLOC   | 4.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 45045SOLOC   | 4.5 x 45  | PZ2             | 200            | 35                 | 840                |
| 45050SOLOC   | 4.5 x 50  | PZ2             | 200            | 15                 | 540                |
| 45060SOLOC   | 4.5 x 60  | PZ2             | 200            | 15                 | 540                |
| 45070SOLOC   | 4.5 x 70  | PZ2             | 200            | 16                 | 384                |

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 45080SOLOC   | 4.5 x 80  | PZ2             | 200            | 16                 | 384                |
| 50025SOLOC   | 5.0 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 50030SOLOC   | 5.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 50035SOLOC   | 5.0 x 35  | PZ2             | 200            | 35                 | 840                |
| 50040SOLOC   | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50045SOLOC   | 5.0 x 45  | PZ2             | 200            | 15                 | 540                |
| 50050SOLOC   | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060SOLOC   | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070SOLOC   | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50075SOLOC   | 5.0 x 75  | PZ2             | 200            | 16                 | 384                |
| 50080SOLOC   | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50090SOLOC   | 5.0 x 90  | PZ2             | 100            | 15                 | 540                |
| 50100SOLOC   | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 50120SOLOC   | 5.0 x 120 | PZ2             | 100            | 15                 | 540                |
| 60040SOLOC   | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60050SOLOC   | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60060SOLOC   | 6.0 x 60  | PZ3             | 200            | 16                 | 384                |
| 60070SOLOC   | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60080SOLOC   | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60090SOLOC   | 6.0 x 90  | PZ3             | 100            | 15                 | 540                |
| 60100SOLOC   | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60120SOLOC   | 6.0 x 120 | PZ3             | 100            | 16                 | 384                |
| 60130SOLOC   | 6.0 x 130 | PZ3             | 100            | 12                 | 384                |
| 60150SOLOC   | 6.0 x 150 | PZ3             | 100            | 12                 | 324                |
| 60180SOLOC   | 6.0 x 180 | PZ3             | 100            | 8                  | 216                |
| 60200SOLOC   | 6.0 x 200 | PZ3             | 100            | 8                  | 192                |

### Industry Box



| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>INDUSTRY PACK (1,000 PCS)</b> |           |                 |                |                    |                    |
| 40030SOLOIND                     | 4.0 x 30  | PZ2             | 1,000          | 12                 | 288                |
| 40040SOLOIND                     | 4.0 x 40  | PZ2             | 1,000          | 12                 | 288                |
| 40050SOLOIND                     | 4.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 40060SOLOIND                     | 4.0 x 60  | PZ2             | 1,000          | 6                  | 144                |
| 40080SOLOIND                     | 4.0 x 80  | PZ2             | 1,000          | 6                  | 144                |
| 50050SOLOIND                     | 5.0 x 50  | PZ2             | 1,000          | 6                  | 144                |
| 50060SOLOIND                     | 5.0 x 60  | PZ2             | 1,000          | 3                  | 81                 |
| 50070SOLOIND                     | 5.0 x 70  | PZ2             | 1,000          | 3                  | 81                 |
| 50080SOLOIND                     | 5.0 x 80  | PZ2             | 1,000          | 3                  | 81                 |
| 50100SOLOIND                     | 5.0 x 100 | PZ2             | 1,000          | 3                  | 81                 |

### Tubs



| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TUB</b>   |           |                 |                |                    |                    |
| 40040STUBY   | 4.0 x 40  | PZ2             | 1,000          | 4                  | 20                 |
| 40050STUBY   | 4.0 x 50  | PZ2             | 800            | 4                  | 20                 |
| 50050STUBY   | 5.0 x 50  | PZ2             | 525            | 4                  | 20                 |
| 50060STUBY   | 5.0 x 60  | PZ2             | 400            | 4                  | 20                 |
| 50070STUBY   | 5.0 x 70  | PZ2             | 375            | 4                  | 20                 |
| 50080STUBY   | 5.0 x 80  | PZ2             | 325            | 4                  | 20                 |
| 50100STUBY   | 5.0 x 100 | PZ2             | 250            | 4                  | 20                 |

SOC01

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |           |                 |                |                    |                    |
| 35015CHYB     | 3.5 x 15  | PZ2             | 750            | 5                  | 870                |
| 35030CHYB     | 3.5 x 30  | PZ2             | 500            | 5                  | 870                |
| 40025CHYB     | 4.0 x 25  | PZ2             | 470            | 5                  | 870                |
| 40030CHYB     | 4.0 x 30  | PZ2             | 430            | 5                  | 870                |
| 40035CHYB     | 4.0 x 35  | PZ2             | 380            | 5                  | 600                |
| 40040CHYB     | 4.0 x 40  | PZ2             | 350            | 5                  | 600                |
| 40050CHYB     | 4.0 x 50  | PZ2             | 280            | 5                  | 600                |
| 40060CHYB     | 4.0 x 60  | PZ2             | 230            | 5                  | 600                |
| 50040CHYB     | 5.0 x 40  | PZ2             | 220            | 5                  | 600                |
| 50050CHYB     | 5.0 x 50  | PZ2             | 180            | 5                  | 600                |
| 50060CHYB     | 5.0 x 60  | PZ2             | 160            | 5                  | 600                |
| 50070CHYB     | 5.0 x 70  | PZ2             | 140            | 5                  | 600                |
| 50080CHYB     | 5.0 x 80  | PZ2             | 120            | 5                  | 600                |
| 50100CHYB     | 5.0 x 100 | PZ2             | 90             | 5                  | 600                |
| 60080CHYB     | 6.0 x 80  | PZ3             | 90             | 5                  | 600                |
| 60120CHYB     | 6.0 x 120 | PZ3             | 50             | 5                  | 600                |
| 60150CHYB     | 6.0 x 150 | PZ3             | 35             | 5                  | 600                |

BAG02

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TIMPAC</b> |           |                 |                |                    |                    |
| 35015CHYP     | 3.5 x 15  | PZ2             | 45             | 10                 | -                  |
| 35030CHYP     | 3.5 x 30  | PZ2             | 35             | 10                 | -                  |
| 40025CHYP     | 4.0 x 25  | PZ2             | 30             | 10                 | -                  |
| 40030CHYP     | 4.0 x 30  | PZ2             | 25             | 10                 | -                  |
| 40035CHYP     | 4.0 x 35  | PZ2             | 22             | 10                 | -                  |
| 40040CHYP     | 4.0 x 40  | PZ2             | 20             | 10                 | -                  |
| 40050CHYP     | 4.0 x 50  | PZ2             | 16             | 10                 | -                  |
| 40060CHYP     | 4.0 x 60  | PZ2             | 12             | 10                 | -                  |
| 50040CHYP     | 5.0 x 40  | PZ2             | 10             | 10                 | -                  |
| 50050CHYP     | 5.0 x 50  | PZ2             | 12             | 10                 | -                  |
| 50060CHYP     | 5.0 x 60  | PZ2             | 10             | 10                 | -                  |
| 50070CHYP     | 5.0 x 70  | PZ2             | 8              | 10                 | -                  |
| 50080CHYP     | 5.0 x 80  | PZ2             | 6              | 10                 | -                  |
| 50100CHYP     | 5.0 x 100 | PZ2             | 4              | 10                 | -                  |
| 60080CHYP     | 6.0 x 80  | PZ3             | 4              | 10                 | -                  |
| 60120CHYP     | 6.0 x 120 | PZ3             | 2              | 10                 | -                  |
| 60150CHYP     | 6.0 x 150 | PZ3             | 2              | 10                 | -                  |

PAK02

### Mixed Pack



The Solo wood screw mixed pack contains 9 of the most popular sizes in 200 & 100 quantities.

| Product Code                  | Size (mm) | Driver Bit Size | Screw Qty (pcs) | Pack Qty (pcs) | Carton Qty (packs) |
|-------------------------------|-----------|-----------------|-----------------|----------------|--------------------|
| <b>MIXED PACK (1,140 PCS)</b> |           |                 |                 |                |                    |
| SOLOMP                        | -         | -               | -               | 1,400          | 10                 |
|                               | 3.5 x 25  | PZ2             | 200             |                |                    |
|                               | 4.0 x 30  | PZ2             | 200             |                |                    |
|                               | 4.0 x 40  | PZ2             | 200             |                |                    |
|                               | 4.0 x 50  | PZ2             | 200             |                |                    |
|                               | 5.0 x 50  | PZ2             | 200             |                |                    |
|                               | 5.0 x 60  | PZ2             | 100             |                |                    |
|                               | 5.0 x 70  | PZ2             | 100             |                |                    |
|                               | 5.0 x 80  | PZ2             | 100             |                |                    |
|                               | 5.0 x 100 | PZ2             | 100             |                |                    |

SOC01

### Grab Pack



The Solo wood screw grab pack contains 9 of the most popular sizes.

| Product Code                 | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>GRAB PACK (1,200 PCS)</b> |           |                 |                |                    |                    |
| TRAY1200                     | -         | -               | 1,200          | 5                  | 135                |
|                              | 3.5 x 16  | PZ2             | 150            |                    |                    |
|                              | 3.5 x 20  | PZ2             | 130            |                    |                    |
|                              | 3.5 x 25  | PZ2             | 220            |                    |                    |
|                              | 4.0 x 30  | PZ2             | 350            |                    |                    |
|                              | 4.0 x 40  | PZ2             | 120            |                    |                    |
|                              | 4.0 x 50  | PZ2             | 80             |                    |                    |
|                              | 5.0 x 50  | PZ2             | 65             |                    |                    |
|                              | 5.0 x 60  | PZ2             | 55             |                    |                    |
|                              | 5.0 x 80  | PZ2             | 30             |                    |                    |

SOC01

## Solo - Double Countersunk

## Zinc



POZI EN 14592:2008



SOFTWOOD

CHIPBOARD

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 30012SOLOZ   | 3.0 x 12  | PZ1             | 200            | 140                | 5,040              |
| 30015SOLOZ   | 3.0 x 15  | PZ1             | 200            | 140                | 5,040              |
| 30020SOLOZ   | 3.0 x 20  | PZ1             | 200            | 140                | 5,040              |
| 30025SOLOZ   | 3.0 x 25  | PZ1             | 200            | 75                 | 2,700              |
| 35015SOLOZ   | 3.5 x 15  | PZ2             | 200            | 140                | 5,040              |
| 35020SOLOZ   | 3.5 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 35025SOLOZ   | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 35030SOLOZ   | 3.5 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 35035SOLOZ   | 3.5 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 35040SOLOZ   | 3.5 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 35050SOLOZ   | 3.5 x 50  | PZ2             | 200            | 35                 | 840                |
| 40015SOLOZ   | 4.0 x 15  | PZ2             | 200            | 75                 | 2,700              |
| 40020SOLOZ   | 4.0 x 20  | PZ2             | 200            | 75                 | 2,700              |
| 40025SOLOZ   | 4.0 x 25  | PZ2             | 200            | 75                 | 1,800              |
| 40030SOLOZ   | 4.0 x 30  | PZ2             | 200            | 75                 | 1,800              |
| 40035SOLOZ   | 4.0 x 35  | PZ2             | 200            | 50                 | 1,200              |
| 40040SOLOZ   | 4.0 x 40  | PZ2             | 200            | 50                 | 1,200              |
| 40045SOLOZ   | 4.0 x 45  | PZ2             | 200            | 35                 | 840                |
| 40050SOLOZ   | 4.0 x 50  | PZ2             | 200            | 35                 | 840                |

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>                       |           |                 |                |                    |                    |
| 40060SOLOZ                       | 4.0 x 60  | PZ2             | 200            | 15                 | 540                |
| 40070SOLOZ                       | 4.0 x 70  | PZ2             | 200            | 15                 | 540                |
| 40080SOLOZ                       | 4.0 x 80  | PZ2             | 200            | 15                 | 540                |
| 45025SOLOZ                       | 4.5 x 25  | PZ2             | 200            | 35                 | 1,200              |
| 45030SOLOZ                       | 4.5 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 45035SOLOZ                       | 4.5 x 35  | PZ2             | 200            | 50                 | 840                |
| 45040SOLOZ                       | 4.5 x 40  | PZ2             | 200            | 35                 | 840                |
| 45050SOLOZ                       | 4.5 x 50  | PZ2             | 200            | 15                 | 540                |
| 45060SOLOZ                       | 4.5 x 60  | PZ2             | 200            | 15                 | 540                |
| 45070SOLOZ                       | 4.5 x 70  | PZ2             | 200            | 16                 | 384                |
| 45080SOLOZ                       | 4.5 x 80  | PZ2             | 200            | 16                 | 384                |
| 50025SOLOZ                       | 5.0 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 50030SOLOZ                       | 5.0 x 30  | PZ2             | 200            | 50                 | 1,200              |
| 50035SOLOZ                       | 5.0 x 35  | PZ2             | 200            | 35                 | 840                |
| 50040SOLOZ                       | 5.0 x 40  | PZ2             | 200            | 35                 | 840                |
| 50045SOLOZ                       | 5.0 x 45  | PZ2             | 200            | 15                 | 540                |
| 50050SOLOZ                       | 5.0 x 50  | PZ2             | 200            | 15                 | 540                |
| 50060SOLOZ                       | 5.0 x 60  | PZ2             | 200            | 16                 | 384                |
| 50070SOLOZ                       | 5.0 x 70  | PZ2             | 200            | 16                 | 384                |
| 50080SOLOZ                       | 5.0 x 80  | PZ2             | 200            | 16                 | 384                |
| 50090SOLOZ                       | 5.0 x 90  | PZ2             | 100            | 15                 | 540                |
| 50100SOLOZ                       | 5.0 x 100 | PZ2             | 100            | 15                 | 540                |
| 50120SOLOZ                       | 5.0 x 120 | PZ2             | 100            | 15                 | 540                |
| 60040SOLOZ                       | 6.0 x 40  | PZ3             | 200            | 15                 | 540                |
| 60050SOLOZ                       | 6.0 x 50  | PZ3             | 200            | 16                 | 384                |
| 60060SOLOZ                       | 6.0 x 60  | PZ3             | 200            | 16                 | 384                |
| 60070SOLOZ                       | 6.0 x 70  | PZ3             | 200            | 12                 | 288                |
| 60080SOLOZ                       | 6.0 x 80  | PZ3             | 200            | 12                 | 288                |
| 60100SOLOZ                       | 6.0 x 100 | PZ3             | 100            | 15                 | 540                |
| 60120SOLOZ                       | 6.0 x 120 | PZ3             | 100            | 16                 | 384                |
| 60150SOLOZ                       | 6.0 x 150 | PZ3             | 100            | 12                 | 324                |
| 60200SOLOZ                       | 6.0 x 200 | PZ3             | 100            | 8                  | 192                |
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 40030STUBZ                       | 4.0 x 30  | PZ2             | 1,250          | 4                  | 20                 |

SOC02

## Exterior (Black Organic)



POZI EN 14592:2008



SOFTWOOD

CHIPBOARD

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TIMPAC</b> |           |                 |                |                    |                    |
| 40030CHBP     | 4.0 x 30  | PZ2             | 25             | 10                 | -                  |

PAK02

## Solo Square Recess



A single thread woodscrew mainly used in various types of timber and man-made boards or into masonry with the use of a plastic plug.

## Solo - Double Countersunk

## Zinc



SQUARE EN 14592:2008



SOFTWOOD

CHIPBOARD

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 40020SQSZ    | 4.0 x 20  | SQ2             | 200            | 75                 | 2,700              |
| 40025SQSZ    | 4.0 x 25  | SQ2             | 200            | 75                 | 2,700              |
| 40040SQSZ    | 4.0 x 40  | SQ2             | 200            | 50                 | 1,200              |
| 50040SQSZ    | 5.0 x 40  | SQ2             | 200            | 35                 | 840                |
| 50050SQSZ    | 5.0 x 50  | SQ2             | 200            | 15                 | 540                |
| 50080SQSZ    | 5.0 x 80  | SQ2             | 200            | 16                 | 384                |

SOC02

## Solo - Pan Head

## Zinc



SQUARE EN 14592:2008



SOFTWOOD

CHIPBOARD

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 40020SQPSZ   | 4.0 x 20  | SQ2             | 200            | 75                 | 2,700              |
| 40025SQPSZ   | 4.0 x 25  | SQ2             | 200            | 75                 | 1,800              |
| 40040SQPSZ   | 4.0 x 40  | SQ2             | 200            | 35                 | 840                |
| 50040SQPSZ   | 5.0 x 40  | SQ2             | 200            | 15                 | 540                |

SOC02

# Twin-Threaded Woodscrews

## Ideal for:

Softwood & masonry with a plastic plug

## For general applications

A traditional woodscrew designed to give rapid installation into softwoods.

This fixing is also ideal for use with a plastic plug when fixing into masonry.



Pozi

### Corrosion Rating

1

Clean, dry & low humidity environments

Available in:

Zinc

Double Countersunk



Round Head



### Double Countersunk

Reduces the likelihood of head shear and assists completion of countersinking.

### Partially Threaded

1-1¼" twin-thread woodscrews and above are part threaded.

### 60° Twin-Thread


60° Twin-threads with parallel shank for faster insertion and greater pull out resistance.

### Surface Hardened

Up to 750 HV to prevent torque shearing under load and a core hardness of up to 450 HV for improved ductility.

### 25° Sharp Point

Sharp point and single lead for a fast start and improved thread acceptance.

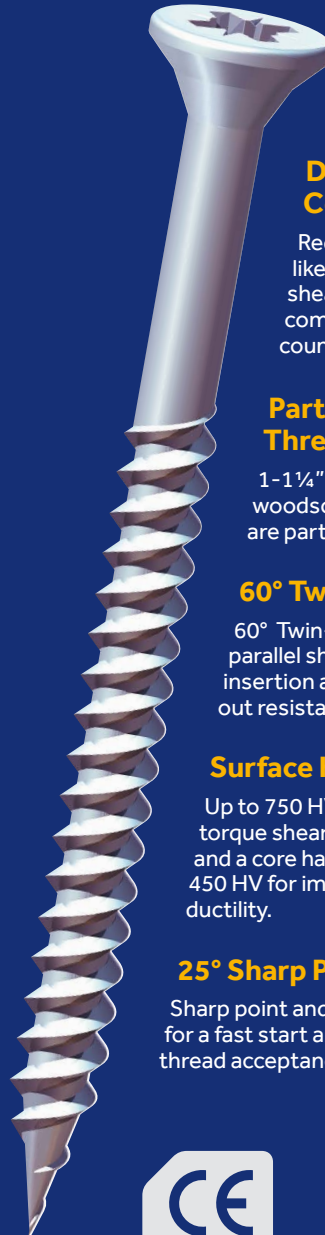

## Twin-Threaded - Double Countersunk

Zinc



POZI EN 14592:2008



SOFTWOOD CHIPBOARD

A traditional twin-thread woodscrew with single lead start for a fast installation. Mainly used in soft timber applications or masonry with a plastic plug.

Note: Partially threaded from 1 1/4"

| Product Code | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |             |                 |                |                    |                    |
| 00412CWZ     | 4 x 1/2     | PZ1             | 200            | 140                | 5,040              |
| 00458CWZ     | 4 x 3/4     | PZ1             | 200            | 140                | 5,040              |
| 00434CWZ     | 4 x 1       | PZ1             | 200            | 140                | 5,040              |
| 00041CWZ     | 4 x 1       | PZ1             | 200            | 75                 | 2,700              |
| 00558CWZ     | 5 x 3/4     | PZ2             | 200            | 140                | 5,040              |
| 00534CWZ     | 5 x 1       | PZ2             | 200            | 140                | 5,040              |
| 00612CWZ     | 6 x 1/2     | PZ2             | 200            | 140                | 5,040              |
| 00658CWZ     | 6 x 3/4     | PZ2             | 200            | 140                | 5,040              |
| 00634CWZ     | 6 x 1       | PZ2             | 200            | 75                 | 2,700              |
| 00061CWZ     | 6 x 1       | PZ2             | 200            | 75                 | 2,700              |
| 06114CWZ     | 6 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 06112CWZ     | 6 x 1 1/2   | PZ2             | 200            | 50                 | 1,200              |
| 06134CWZ     | 6 x 1 3/4   | PZ2             | 200            | 35                 | 840                |
| 00062CWZ     | 6 x 2       | PZ2             | 200            | 35                 | 840                |
| 00758CWZ     | 7 x 3/4     | PZ2             | 200            | 75                 | 2,700              |
| 00734CWZ     | 7 x 1       | PZ2             | 200            | 75                 | 1,800              |
| 00071CWZ     | 7 x 1       | PZ2             | 200            | 75                 | 1,800              |
| 07114CWZ     | 7 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 07112CWZ     | 7 x 1 1/2   | PZ2             | 200            | 35                 | 840                |
| 00812CWZ     | 8 x 1/2     | PZ2             | 200            | 140                | 5,040              |
| 00858CWZ     | 8 x 3/4     | PZ2             | 200            | 75                 | 2,700              |
| 00834CWZ     | 8 x 1       | PZ2             | 200            | 75                 | 2,700              |
| 00081CWZ     | 8 x 1       | PZ2             | 200            | 75                 | 1,800              |
| 08114CWZ     | 8 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 08112CWZ     | 8 x 1 1/2   | PZ2             | 200            | 50                 | 1,200              |
| 08134CWZ     | 8 x 1 3/4   | PZ2             | 200            | 35                 | 840                |
| 00082CWZ     | 8 x 2       | PZ2             | 200            | 35                 | 540                |
| 08214CWZ     | 8 x 2 1/4   | PZ2             | 200            | 15                 | 540                |
| 08212CWZ     | 8 x 2 1/2   | PZ2             | 200            | 16                 | 384                |
| 00083CWZ     | 8 x 3       | PZ2             | 200            | 16                 | 384                |
| 00083CWZ100  | 8 x 3       | PZ2             | 100            | 50                 | 1,200              |
| 01034CWZ     | 10 x 3/4    | PZ2             | 200            | 50                 | 1,200              |
| 00101CWZ     | 10 x 1      | PZ2             | 200            | 50                 | 1,200              |
| 10114CWZ     | 10 x 1 1/4  | PZ2             | 200            | 50                 | 1,200              |
| 10112CWZ     | 10 x 1 1/2  | PZ2             | 200            | 35                 | 840                |
| 10134CWZ     | 10 x 1 3/4  | PZ2             | 200            | 15                 | 540                |
| 00102CWZ     | 10 x 2      | PZ2             | 200            | 15                 | 540                |
| 10214CWZ     | 10 x 2 1/4  | PZ2             | 200            | 16                 | 384                |
| 10212CWZ     | 10 x 2 1/2  | PZ2             | 200            | 16                 | 384                |
| 00103CWZ     | 10 x 3      | PZ2             | 200            | 16                 | 384                |
| 00103CWZ100  | 10 x 3      | PZ2             | 100            | 15                 | 540                |
| 10312CWZ     | 10 x 3 1/2  | PZ2             | 100            | 15                 | 540                |
| 00104CWZ     | 10 x 4      | PZ2             | 100            | 15                 | 540                |
| 00121CWZ     | 12 x 1      | PZ3             | 200            | 35                 | 840                |
| 12114CWZ     | 12 x 1 1/4  | PZ3             | 200            | 35                 | 840                |
| 12112CWZ     | 12 x 1 1/2  | PZ3             | 200            | 15                 | 540                |
| 00122CWZ     | 12 x 2      | PZ3             | 200            | 16                 | 384                |
| 12212CWZ     | 12 x 2 1/2  | PZ3             | 200            | 16                 | 384                |
| 00123CWZ     | 12 x 3      | PZ3             | 200            | 12                 | 288                |
| 00123CWZ100  | 12 x 3      | PZ3             | 100            | 15                 | 540                |
| 12312CWZ     | 12 x 3 1/2  | PZ3             | 100            | 15                 | 540                |
| 00124CWZ     | 12 x 4      | PZ3             | 100            | 15                 | 540                |

W0001



| Product Code  | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |             |                 |                |                    |                    |
| 00658CWZB     | 6 x 3/4     | PZ2             | 700            | 5                  | 870                |
| 00634CWZB     | 6 x 1       | PZ2             | 620            | 5                  | 870                |
| 00061CWZB     | 6 x 1       | PZ2             | 500            | 5                  | 870                |
| 00834CWZB     | 8 x 3/4     | PZ2             | 540            | 5                  | 870                |
| 00081CWZB     | 8 x 1       | PZ2             | 470            | 5                  | 870                |
| 08114CWZB     | 8 x 1 1/4   | PZ2             | 390            | 5                  | 600                |
| 08112CWZB     | 8 x 1 1/2   | PZ2             | 350            | 5                  | 600                |
| 00082CWZB     | 8 x 2       | PZ2             | 270            | 5                  | 600                |
| 08212CWZB     | 8 x 2 1/2   | PZ2             | 200            | 5                  | 600                |
| 00083CWZB     | 8 x 3       | PZ2             | 180            | 5                  | 600                |
| 10112CWZB     | 10 x 1 1/2  | PZ2             | 250            | 5                  | 600                |
| 00102CWZB     | 10 x 2      | PZ2             | 190            | 5                  | 600                |
| 10212CWZB     | 10 x 2 1/2  | PZ2             | 160            | 5                  | 600                |
| 00103CWZB     | 10 x 3      | PZ2             | 140            | 5                  | 600                |
| 00104CWZB     | 10 x 4      | PZ2             | 90             | 5                  | 600                |

BAG02

| Product Code  | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>TIMPAC</b> |             |                 |                |                    |                    |
| 00658CWZP     | 6 x 3/4     | PZ2             | 45             | 10                 | -                  |
| 00634CWZP     | 6 x 1       | PZ2             | 40             | 10                 | -                  |
| 00061CWZP     | 6 x 1       | PZ2             | 35             | 10                 | -                  |
| 00834CWZP     | 8 x 3/4     | PZ2             | 35             | 10                 | -                  |
| 00081CWZP     | 8 x 1       | PZ2             | 30             | 10                 | -                  |
| 08114CWZP     | 8 x 1 1/4   | PZ2             | 25             | 10                 | -                  |
| 08112CWZP     | 8 x 1 1/2   | PZ2             | 20             | 10                 | -                  |
| 00082CWZP     | 8 x 2       | PZ2             | 16             | 10                 | -                  |
| 08212CWZP     | 8 x 2 1/2   | PZ2             | 12             | 10                 | -                  |
| 00083CWZP     | 8 x 3       | PZ2             | 10             | 10                 | -                  |
| 10112CWZP     | 10 x 1 1/2  | PZ2             | 15             | 10                 | -                  |
| 00102CWZP     | 10 x 2      | PZ2             | 12             | 10                 | -                  |
| 10212CWZP     | 10 x 2 1/2  | PZ2             | 10             | 10                 | -                  |
| 00103CWZP     | 10 x 3      | PZ2             | 8              | 10                 | -                  |
| 00104CWZP     | 10 x 4      | PZ2             | 6              | 10                 | -                  |

PAK02

### Mixed Tray



The twin-thread woodscrew mixed tray contains 12 of the most popular sizes.

| Product Code                  | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>MIXED TRAY (1,140 PCS)</b> |             |                 |                |                    |                    |
| WOODTRAY                      | 6 x 1/2     | PZ2             | 180            | 6                  | 108                |
|                               | 6 x 3/4     | PZ2             | 190            |                    |                    |
|                               | 6 x 1       | PZ2             | 130            |                    |                    |
|                               | 6 x 1 1/4   | PZ2             | 110            |                    |                    |
|                               | 8 x 3/4     | PZ2             | 100            |                    |                    |
|                               | 8 x 1 1/4   | PZ2             | 85             |                    |                    |
|                               | 8 x 1 1/2   | PZ2             | 65             |                    |                    |
|                               | 8 x 1       | PZ2             | 60             |                    |                    |
|                               | 8 x 2       | PZ2             | 50             |                    |                    |
|                               | 10 x 2      | PZ2             | 35             |                    |                    |
|                               | 10 x 2 1/2  | PZ2             | 35             |                    |                    |
|                               |             |                 |                |                    |                    |

W0001

## Twin-Threaded - Roundhead

Zinc



POZI EN 14592:2008



SOFTWOOD

Roundhead zinc and clear woodscrew used for clamping to flat surfaces or to achieve a high aesthetic appearance.

Note: Partially threaded from 1 1/4"

| Product Code | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |             |                 |                |                    |                    |
| 00412CRWZ    | 4 x 1/2     | PZ1             | 200            | 140                | 5,040              |
| 00458CRWZ    | 4 x 3/4     | PZ1             | 200            | 140                | 5,040              |
| 00612CRWZ    | 6 x 1/2     | PZ2             | 200            | 140                | 5,040              |
| 00658CRWZ    | 6 x 3/4     | PZ2             | 200            | 75                 | 2,700              |
| 00634CRWZ    | 6 x 1       | PZ2             | 200            | 75                 | 1,800              |
| 00061CRWZ    | 6 x 1       | PZ2             | 200            | 75                 | 1,800              |
| 06114CRWZ    | 6 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 08112CRWZ    | 8 x 1/2     | PZ2             | 200            | 75                 | 2,700              |
| 08114CRWZ    | 8 x 3/4     | PZ2             | 200            | 75                 | 2,700              |
| 0812CRWZ     | 8 x 1       | PZ2             | 200            | 75                 | 2,700              |
| 08134CRWZ    | 8 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 00081CRWZ    | 8 x 1       | PZ2             | 200            | 50                 | 1,200              |
| 08114CRWZ    | 8 x 1 1/4   | PZ2             | 200            | 50                 | 1,200              |
| 08112CRWZ    | 8 x 1 1/2   | PZ2             | 200            | 35                 | 840                |
| 00082CRWZ    | 8 x 2       | PZ2             | 200            | 35                 | 540                |
| 00101CRWZ    | 10 x 1      | PZ2             | 200            | 50                 | 1,200              |
| 10114CRWZ    | 10 x 1 1/4  | PZ2             | 200            | 35                 | 840                |
| 10112CRWZ    | 10 x 1 1/2  | PZ2             | 200            | 35                 | 840                |
| 00102CRWZ    | 10 x 2      | PZ2             | 200            | 15                 | 540                |
| 10212CRWZ    | 10 x 2 1/2  | PZ2             | 200            | 16                 | 384                |
| 00103CRWZ    | 10 x 3      | PZ2             | 200            | 16                 | 384                |
| 00122CRWZ    | 12 x 2      | PZ3             | 200            | 16                 | 384                |

W0001

## Twin-Threaded Screws & Plugs

A traditional twin-thread woodscrew with single lead start for a fast installation. Mainly used in soft timber applications or masonry with a plastic plug.

Note: Partially threaded from 1 1/4"




## Brown Plugs & Twin-Threaded Screws

Zinc



Premium brown premium plastic plugs made from high density polyethylene material (HDPE) to fit screw diameter 4.8, 5.5, 6.3mm.

Note: It may be beneficial to reduce drill diameter in soft materials.



BRICK

CONCRETE

BLOCK

| Product Code | Contents            | Size      | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|---------------------|-----------|----------------|--------------------|
| tub          |                     |           |                |                    |
| 778254       | -                   | -         | -              | 20                 |
|              | Woodscrews          | 10 x 2"   | 400            |                    |
|              | Brown Plastic Plugs | 7.0 x 42  | 400            |                    |
|              | Masonry Drill Bit   | 7.0 x 100 | 1              |                    |
|              | Impact Driver Bits  | PZ2 x 25  | 5              |                    |

PLU01

## Rainwater Screws

Specially designed for the fitting of brackets and clips during installation of PVCu rainwater systems.

When fixing into brick a brown (7mm) or red (5.5mm) plug is required.



**Low Profile Head**

To Assist Clamping

**Single Deep Thread**

For Holding Power

**Slash Point**

For Low Torque & Reduced Timber Splitting



**Superior Corrosion Resistance**

Salt Spray Tested Up To 1,000 Hours

**For Fixing:**

Gutters • Downpipes • Rainwater Systems

## Rainwater Screws

Exterior (Black or White Organic)



POZI



| Product Code              | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| TUB (DRIVER BIT INCLUDED) |           |                 |                |                    |                    |
| Black Organic             |           |                 |                |                    |                    |
| 40040CLARB                | 4.0 x 40  | PZ2             | 300            | 12                 | 360                |
| 50025CLARB                | 5.0 x 25  | PZ2             | 400            | 12                 | 360                |
| 60040CLARB                | 6.0 x 40  | PZ3             | 200            | 12                 | 360                |
| White Organic             |           |                 |                |                    |                    |
| 40040CLARW                | 4.0 x 40  | PZ2             | 300            | 12                 | 360                |
| 50025CLARW                | 5.0 x 25  | PZ2             | 400            | 12                 | 360                |
| 60040CLARW                | 6.0 x 40  | PZ3             | 200            | 12                 | 360                |

RWS01



## Blackjax



### Blackjax

#### Black Organic



POZI EN 14592:2008



SOFTWOOD

A twin-threaded wood screw with a black organic finish designed to be used with black ironmongery.

Note: Partially threaded from 1 1/4"

| Product Code  | Size (imp.) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-------------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |             |                 |                |                    |                    |
| 00658BJC      | 6 x 3/4     | P22             | 200            | 75                 | 2,700              |
| 00634BJC      | 6 x 3/4     | P22             | 200            | 75                 | 1,800              |
| 00061BJC      | 6 x 1       | P22             | 200            | 75                 | 1,800              |
| 00858BJC      | 8 x 3/4     | P22             | 200            | 75                 | 2,700              |
| 00834BJC      | 8 x 3/4     | P22             | 200            | 50                 | 1,200              |
| 00081BJC      | 8 x 1       | P22             | 200            | 35                 | 840                |
| 08114BJC      | 8 x 1 1/4   | P22             | 200            | 35                 | 840                |
| 08112BJC      | 8 x 1 1/2   | P22             | 200            | 35                 | 840                |
| 00082BJC      | 8 x 2       | P22             | 200            | 15                 | 540                |
| 00101BJC      | 10 x 1      | P22             | 200            | 35                 | 840                |
| 10114BJC      | 10 x 1 1/4  | P22             | 200            | 35                 | 840                |
| 10112BJC      | 10 x 1 1/2  | P22             | 200            | 15                 | 540                |
| 00102BJC      | 10 x 2      | P22             | 200            | 15                 | 540                |
| WO002         |             |                 |                |                    |                    |
| <b>TIMPAC</b> |             |                 |                |                    |                    |
| 00061BJCP     | 6 x 1       | P22             | 20             | 10                 | -                  |
| 00081BJCP     | 8 x 1       | P22             | 15             | 10                 | -                  |
| 08112BJCP     | 8 x 1 1/2   | P22             | 10             | 10                 | -                  |
| 10112BJCP     | 10 x 1 1/2  | P22             | 8              | 10                 | -                  |
| PAK03         |             |                 |                |                    |                    |

## Carcass Screw



### Carcass Screw

#### Black Phosphate



POZI EN 14592:2008




SOFTWOOD

Designed for use in the construction of furniture carcasses.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 40033CARC    | 4.0 x 33  | P22             | 500            | 16                 | 384                |
| 40045CARC    | 4.0 x 45  | P22             | 500            | 16                 | 384                |
| CAR01        |           |                 |                |                    |                    |

## Solid Brass Screws

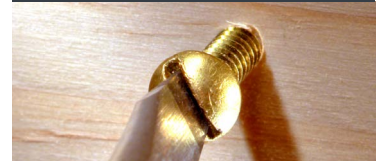

### Solid Brass Screws

#### Made from Solid Brass



Countersunk

Roundhead

Raised Head



SLOTTED



SOFTWOOD


A range of traditional polished solid brass slotted woodscrews. Ideal for applications where a traditional cosmetic finish is required or for use in corrosive environments.

| Product Code | Head Type   | Size (imp.) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-------------|-------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |             |             |                |                    |                    |
| 00238CBS     | Countersunk | 2 x 3/4     | 200            | 140                | 5,040              |
| 00412CBS     | Countersunk | 4 x 1/2     | 200            | 140                | 5,040              |
| 00458CBS     | Countersunk | 4 x 3/4     | 200            | 140                | 5,040              |
| 00434CBS     | Countersunk | 4 x 3/4     | 200            | 140                | 5,040              |
| 00612CBS     | Countersunk | 6 x 1/2     | 200            | 140                | 5,040              |
| 00634CBS     | Countersunk | 6 x 3/4     | 200            | 75                 | 2,700              |
| 00061CBS     | Countersunk | 6 x 1       | 200            | 75                 | 2,700              |
| 06112CBS     | Countersunk | 6 x 1 1/2   | 200            | 50                 | 1,200              |
| 00071CBS     | Countersunk | 7 x 1       | 200            | 75                 | 1,800              |
| 00834CBS     | Countersunk | 8 x 3/4     | 200            | 75                 | 2,700              |
| 00081CBS     | Countersunk | 8 x 1       | 200            | 75                 | 1,800              |
| 08114CBS     | Countersunk | 8 x 1 1/4   | 200            | 75                 | 1,800              |
| 08112CBS     | Countersunk | 8 x 1 1/2   | 200            | 50                 | 1,200              |
| 00082CBS     | Countersunk | 8 x 2       | 200            | 15                 | 540                |
| 10114CBS     | Countersunk | 10 x 1 1/4  | 200            | 50                 | 1,200              |
| 10112CBS     | Countersunk | 10 x 1 1/2  | 200            | 15                 | 840                |
| 00102CBS     | Countersunk | 10 x 2      | 100            | 15                 | 840                |
| 10212CBS     | Countersunk | 10 x 2 1/2  | 100            | 15                 | 540                |
| 12212CBS     | Countersunk | 12 x 2 1/2  | 100            | 15                 | 540                |
| 00412RBS     | Roundhead   | 4 x 3/4     | 200            | 140                | 540                |
| 00634RBS     | Roundhead   | 6 x 3/4     | 200            | 75                 | 5,040              |
| 00061RBS     | Roundhead   | 6 x 1       | 200            | 75                 | 2,700              |
| 06112RBS     | Roundhead   | 6 x 1 1/2   | 200            | 50                 | 1,800              |
| 00834RBS     | Roundhead   | 8 x 3/4     | 200            | 75                 | 1,200              |
| 00081RBS     | Roundhead   | 8 x 1       | 200            | 50                 | 2,700              |
| 08112RBS     | Roundhead   | 8 x 1 1/2   | 200            | 35                 | 1,200              |
| 00061RRBS    | Raised Head | 6 x 1       | 200            | 75                 | 1,800              |
| 00082RRBS    | Raised Head | 8 x 2       | 200            | 15                 | 540                |
| WO801        |             |             |                |                    |                    |

## Mirror & Decorative Screws & Accessories

### Mirror Screw

For hanging a mirror where an aesthetic finish is required. Solid head with rubber washer to protect the mirror from cracking. Includes screws with a slotted recess.

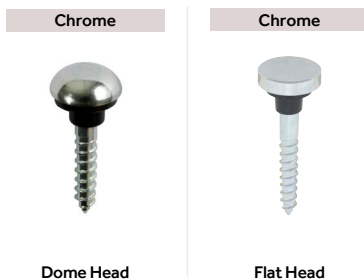

Dome Head

Flat Head

| Product Code  | Head Type | Finish | Screw Size (imp.) | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|-----------|--------|-------------------|----------------|--------------------|
| <b>BOX</b>    |           |        |                   |                |                    |
| 00834CMIR200  | Dome      | Chrome | 8 x ¾             | 200            | 10                 |
| 00081CMIR200  | Dome      | Chrome | 8 x 1             | 200            | 10                 |
| 08112CMIR200  | Dome      | Chrome | 8 x 1½            | 200            | 10                 |
| 00082CMIR200  | Dome      | Chrome | 8 x 2             | 200            | 10                 |
| <b>TIMPAC</b> |           |        |                   |                |                    |
| 08114CMIRP    | Dome      | Chrome | 8 x 1¼            | 10             | 10                 |
| 08112CMIRP    | Dome      | Chrome | 8 x 1½            | 8              | 10                 |
| 08114FCMIRP   | Flat      | Chrome | 8 x 1¼            | 10             | 10                 |
| 08112FCMIRP   | Flat      | Chrome | 8 x 1½            | 8              | 10                 |

MIR01

PAK06

### Knurled Brass Inset Screw Cup




Made from Solid Brass

Solid brass screw cups for a highly professional and flush finish. Commonly used with brass countersunk screws for decorative finish or for panels where

frequent removal and replacement may be required.

Drill hole Ø size provided is a guide only and may vary in woods with varying hardness. We recommend cups are covered before gently tapping into place to avoid damage to both brass and timber.



| Product Code  | To Fit Screw Ø (mm) | To Fit Screw G (imp.) | Drill Hole Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|---------------------|-----------------------|-------------------|----------------|--------------------|
| <b>TIMPAC</b> |                     |                       |                   |                |                    |
| 725221        | 3.5                 | 6                     | 8                 | 8              | 10                 |
| 725584        | 4.0 - 4.5           | 8                     | 8.5               | 8              | 10                 |
| 725174        | 4.8 - 5.0           | 10                    | 11                | 8              | 10                 |
| 725569        | 5.5 - 6.0           | 12                    | 12                | 8              | 10                 |

G - GAUGE

PAK07

### Screw Cup



A surface screw cup designed to allow the head of the screw to sit proud giving a decorative finish.

|               |               | <b>Electro Brass</b> |                       | <b>Nickel</b>  |                    |
|---------------|---------------|----------------------|-----------------------|----------------|--------------------|
| Product Code  | Finish        | To Fit Screw Ø (mm)  | To Fit Screw G (imp.) | Pack Qty (pcs) | Carton Qty (packs) |
| <b>TIMBAG</b> |               |                      |                       |                |                    |
| 8BCUPB        | Electro Brass | 4.0                  | 8                     | 800            | 5                  |
| 8NCUPB        | Nickel        | 4.0                  | 8                     | 800            | 5                  |
| <b>TIMPAC</b> |               |                      |                       |                |                    |
| 6BCUPP        | Electro Brass | 3.5                  | 6                     | 60             | 10                 |
| 8BCUPP        | Electro Brass | 4.0                  | 8                     | 55             | 10                 |
| 10BCUPP       | Electro Brass | 5.0                  | 10                    | 50             | 10                 |
| 6NCUPP        | Nickel        | 3.5                  | 6                     | 60             | 10                 |
| 8NCUPP        | Nickel        | 4.0                  | 8                     | 55             | 10                 |
| 10NCUPP       | Nickel        | 5.0                  | 10                    | 50             | 10                 |

G - GAUGE

PAK07

### Brass Threaded Screw Cap

Made from Solid Brass



A range of two piece solid brass screw caps, available in 5 finishes and 4 sizes. Used for mirrors, signs, plaques or acrylic poster holders.



| Product Code  | Finish          | Ø (mm) | To Fit Screw Ø. (mm) | To Fit Screw Gauge (imp.) | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|-----------------|--------|----------------------|---------------------------|----------------|--------------------|
| <b>TIMPAC</b> |                 |        |                      |                           |                |                    |
| TSC12PCP      | Polished Chrome | 12     | 3.5                  | 6                         | 4              | 5                  |
| TSC14PCP      | Polished Chrome | 14     | 4.0                  | 8                         | 4              | 5                  |
| TSC16PCP      | Polished Chrome | 16     | 5.0                  | 10                        | 4              | 5                  |
| TSC18PCP      | Polished Chrome | 18     | 6.0                  | 12                        | 4              | 5                  |
| TSC12SCP      | Satin Chrome    | 12     | 3.5                  | 6                         | 4              | 5                  |
| TSC14SCP      | Satin Chrome    | 14     | 4.0                  | 8                         | 4              | 5                  |
| TSC16SCP      | Satin Chrome    | 16     | 5.0                  | 10                        | 4              | 5                  |
| TSC18SCP      | Satin Chrome    | 18     | 6.0                  | 12                        | 4              | 5                  |
| TSC12PBP      | Polished Brass  | 12     | 3.5                  | 6                         | 4              | 5                  |
| TSC14PBP      | Polished Brass  | 14     | 4.0                  | 8                         | 4              | 5                  |
| TSC16PBP      | Polished Brass  | 16     | 5.0                  | 10                        | 4              | 5                  |
| TSC18PBP      | Polished Brass  | 18     | 6.0                  | 12                        | 4              | 5                  |
| TSC12SBP      | Satin Brass     | 12     | 3.5                  | 6                         | 4              | 5                  |
| TSC14SBP      | Satin Brass     | 14     | 4.0                  | 8                         | 4              | 5                  |
| TSC16SBP      | Satin Brass     | 16     | 5.0                  | 10                        | 4              | 5                  |
| TSC18SBP      | Satin Brass     | 18     | 6.0                  | 12                        | 4              | 5                  |
| TSC12SNP      | Satin Nickel    | 12     | 3.5                  | 6                         | 4              | 5                  |
| TSC14SNP      | Satin Nickel    | 14     | 4.0                  | 8                         | 4              | 5                  |
| TSC16SNP      | Satin Nickel    | 16     | 5.0                  | 10                        | 4              | 5                  |
| TSC18SNP      | Satin Nickel    | 18     | 6.0                  | 12                        | 4              | 5                  |

PAK07

|                 |                 |    |     |    |    |    |
|-----------------|-----------------|----|-----|----|----|----|
| <b>BULK BOX</b> |                 |    |     |    |    |    |
| TSC14PC         | Polished Chrome | 14 | 4.0 | 8  | 40 | 18 |
| TSC16PC         | Polished Chrome | 16 | 5.0 | 10 | 40 | 15 |
| TSC14SC         | Satin Chrome    | 14 | 4.0 | 8  | 40 | 18 |
| TSC16SC         | Satin Chrome    | 16 | 5.0 | 10 | 40 | 15 |

BSC01

## Screw Caps & Covers

### Hinged Screw Cap



For cosmetic use to conceal screws. Hinged to aid cap retention during and after installation.

White



Grey



Dark Grey



Black



Brown



Blue



Yellow

| Product Code  | Colour    | To Fit Screw Ø (mm) | To Fit Screw G (imp.) | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|-----------|---------------------|-----------------------|----------------|--------------------|
| <b>TIMPAC</b> |           |                     |                       |                |                    |
| SHCCWHITEP    | White     | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCGREYP     | Grey      | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCDGREYP    | Dark Grey | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCBLACKP    | Black     | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCBROWNPNP  | Brown     | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCBLUEP     | Blue      | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| SHCCYELLOWP   | Yellow    | 3.0 - 4.5           | 4 - 9                 | 100            | 10                 |
| LHCCWHITEP    | White     | 5.0 - 6.0           | 10 - 12               | 50             | 10                 |
| LHCCGREYP     | Grey      | 5.0 - 6.0           | 10 - 12               | 50             | 10                 |
| LHCCDGREYP    | Dark Grey | 5.0 - 6.0           | 10 - 12               | 50             | 10                 |
| LHCCBLACKP    | Black     | 5.0 - 6.0           | 10 - 12               | 50             | 10                 |
| LHCCBROWNPNP  | Brown     | 5.0 - 6.0           | 10 - 12               | 50             | 10                 |

PAK07

### Two Piece Screw Cap



White



Chrome



Brown



Clay



Oak



Cream



Grey



Anthracite



Black

Two piece clip on caps with retaining washers, to provide a protective and decorative finish.



| Product Code  | Finish     | To Fit Screw Ø (mm) | To Fit Screw G (Imp.) | Pack Qty (pcs) | Carton Qty (packs) |
|---------------|------------|---------------------|-----------------------|----------------|--------------------|
| <b>TIMPAC</b> |            |                     |                       |                |                    |
| WHITEPLAST    | White      | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| CHROMEPLAST   | Chrome     | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| BROWNPLAST    | Brown      | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| CBROWNPLAST   | Clay Brown | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| OAKPLAST      | Oak        | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| CREAMPLAST    | Cream      | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| GREYPLAST     | Grey       | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| ANTHPLAST     | Anthracite | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |
| BLACKPLAST    | Black      | 3.5 - 4.2           | 6 - 8                 | 100            | 15                 |

PLA01

### Self-Adhesive Cover Cap



White Matt



White Gloss



Ivory



Beige



Aluminium



Grey



Oak



Odessa Oak



Beech



Maple



Driftwood



Mahogany



African Hardwood



Dijon Walnut



Natural Walnut



Winchester Oak



Anthracite Grey



Black

Provides a discreet, flush and water tight covering. Ideal for screw heads, unused pre-drilled holes and general repairs to damaged surfaces.




| Product Code | Colour           | Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|------------------|--------|----------------|--------------------|
| <b>PACK</b>  |                  |        |                |                    |
| COVERWM13    | White Matt       | 13     | 112            | 200                |
| COVERWM18    | White Matt       | 18     | 105            | 200                |
| COVERWG13    | White Gloss      | 13     | 112            | 200                |
| COVERIV13    | Ivory            | 13     | 112            | 200                |
| COVERBG13    | Beige            | 13     | 112            | 200                |
| COVERAL13    | Aluminium        | 13     | 112            | 200                |
| COVERGR13    | Grey             | 13     | 112            | 200                |
| COVEROA13    | Oak              | 13     | 112            | 200                |
| COVEROO13    | Odessa Oak       | 13     | 112            | 200                |
| COVERBE13    | Beech            | 13     | 112            | 200                |
| COVERMA13    | Maple            | 13     | 112            | 200                |
| COVERDR13    | Driftwood        | 13     | 112            | 200                |
| COVERMH13    | Mahogany         | 13     | 112            | 200                |
| COVERAH13    | African Hardwood | 13     | 112            | 200                |
| COVERDW13    | Dijon Walnut     | 13     | 112            | 200                |
| COVERNW13    | Natural Walnut   | 13     | 112            | 200                |
| COVERWO13    | Winchester Oak   | 13     | 112            | 200                |
| COVERAG13    | Anthracite Grey  | 13     | 112            | 200                |
| COVERBL13    | Black            | 13     | 112            | 200                |

PLA03

|                   |             |    |       |     |
|-------------------|-------------|----|-------|-----|
| <b>TRADE PACK</b> |             |    |       |     |
| 752493            | White Gloss | 13 | 1,008 | 100 |
| 752030            | White Matt  | 13 | 1,008 | 100 |
| 752645            | Black       | 13 | 1,008 | 100 |

PLA03

## Premium Decking Screws



# C2

## DECK-FIX PREMIUM SCREW

**DESIGNED FOR DECKING  
PLATFORMS & EXTERNAL  
TIMBER CONSTRUCTION**



**DESIGNED  
FOR SUPERIOR  
CLAMPING  
WITH HELIX TO  
STOP TIMBER  
JACKING**



**REDUCED  
IMPACT  
RESISTANT  
HEAD FOR A  
CLEAN FINISH**



**PRECISION  
TX DRIVE  
RECESS**

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
|--------------|-----------|----------------|--------------------|--------------------|

### BOX (DRIVER BIT INCLUDED)

|            |          |     |    |     |
|------------|----------|-----|----|-----|
| 50C2D250BX | 4.5 x 50 | 250 | 15 | 540 |
| 65C2D250BX | 4.5 x 65 | 250 | 18 | 432 |
| 75C2D250BX | 4.5 x 75 | 250 | 18 | 432 |
| 85C2D250BX | 4.5 x 85 | 250 | 18 | 432 |

ID004

### TUB (DRIVER BIT INCLUDED)

|           |          |       |   |     |
|-----------|----------|-------|---|-----|
| 50C2D250  | 4.5 x 50 | 250   | 4 | 288 |
| 65C2D250  | 4.5 x 65 | 250   | 4 | 288 |
| 65C2D1000 | 4.5 x 65 | 1,000 | 1 | 72  |
| 75C2D250  | 4.5 x 75 | 250   | 4 | 216 |

ID004

### TIMBAG

|        |          |     |   |     |
|--------|----------|-----|---|-----|
| 50C2DB | 4.5 x 50 | 175 | 5 | 500 |
| 65C2DB | 4.5 x 65 | 145 | 5 | 500 |
| 75C2DB | 4.5 x 75 | 120 | 5 | 500 |

BAG01

### INDUSTRY PACK (1,000 PCS)

|          |          |       |   |    |
|----------|----------|-------|---|----|
| 65C2DIND | 4.5 x 65 | 1,000 | 3 | 81 |
|----------|----------|-------|---|----|

ID004

### Impact Resistant Head

strengthened head to prevent shearing when installed with an impact tool.

### Ribs Under Head

for improved countersinking.

### Helix

for removing debris and improving clamping.

### Patented Multi-Layer

coated with a patented multi-layer corrosion resistant plating to withstand 1000hrs salt spray.

THE  
**C2**

**TWIN-CUT**

**1<sup>ST</sup> CUT FOR RAPID  
"PICK-UP" AND QUICK  
INSERTION TIME**

**2<sup>ND</sup> CUT HELPS PREVENT  
WOOD SPLITTING WHEN  
SCREWING CLOSE TO  
THE EDGE**

## C2 Cylinder Head Decking Screws

### Exterior (Green Organic)



TX DRIVE

EN 14592:2008

A premium decking screw with a reduced cylindrical head to give a concealed finish and patented C2 twin-cut technology.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 433209                           | 4.5 x 60  | TX15            | 250            | 8                  | 288                |

ID004


### A2 Stainless Steel



TX DRIVE

EN 14592:2008

Reduced cylindrical head to give a concealed finish and single slash for low torque and reduced timber splitting.



| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 433187                           | 4.5 x 60  | TX15            | 250            | 4                  | 315                |

ID002



## Decking Screws



### Decking Screw - Double Countersunk

#### Exterior (Green Organic)



POZI



EN 14592:2008

#### Long Lasting Corrosion Resistance!



An economic but highly effective softwood decking screw. Plated to withstand up to 500 hours in a salt spray test and is designed to give a rapid installation and a secure fixing.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>                       |           |                 |                |                    |                    |
| 50TDECK                          | 4.5 x 50  | P22             | 200            | 15                 | 540                |
| 60TDECK                          | 4.5 x 60  | P22             | 200            | 15                 | 540                |
| 70TDECK                          | 4.5 x 70  | P22             | 200            | 16                 | 384                |
| 80TDECK                          | 4.5 x 80  | P22             | 200            | 16                 | 384                |
| IDD01                            |           |                 |                |                    |                    |
| <b>TUB (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 50TDECK2000                      | 4.5 x 50  | P22             | 2,000          | 2                  | 72                 |
| 60TDECK1500                      | 4.5 x 60  | P22             | 1,500          | 2                  | 72                 |
| IDD01                            |           |                 |                |                    |                    |
| <b>INDUSTRY PACK (1,000 PCS)</b> |           |                 |                |                    |                    |
| 60TDECKIND                       | 4.5 x 60  | P22             | 1,000          | 6                  | 144                |
| IDD01                            |           |                 |                |                    |                    |



Box



Industry Pack



Tub

### Decking Screw - Double Countersunk

#### A2 Stainless Steel



POZI



EN 14592:2008

#### Superior Corrosion Resistance!



An economic but highly effective softwood decking screw. Manufactured from A2 Stainless Steel. Offering superior corrosion resistance making it ideal for multiple external applications, especially for the construction of decking platforms. Stainless steel must be used where there is a corrosive environment and/or the base material has inherent corrosive characteristics e.g. Green Oak.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>TUB</b>   |           |                 |                |                    |                    |
| 50TDECKSS    | 4.5 x 50  | P22             | 250            | 8                  | 288                |
| 65TDECKSS    | 4.5 x 65  | P22             | 250            | 8                  | 288                |
| IDD02        |           |                 |                |                    |                    |



Tub

## Collated Decking Screws



### C2 Deck-Fix Collated Decking Screw



SQUARE



EN 14592:2008

#### Exterior (Green Organic)

A premium decking screw using the C2 twin-cut technology. The collated strips are designed to be compatible with all leading power tool brands.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 65C2DCOLL    | 4.5 x 65  | 500            | 10                 | 240                |
| COL08        |           |                |                    |                    |

**C2**
**DECK-FIX**  
**PREMIUM SCREW**
**DESIGNED FOR DECKING**  
**PLATFORMS & EXTERNAL**  
**TIMBER CONSTRUCTION**
**See Page 29**




# Timber Framing & Landscaping Screws

## Ideal for:

Decking Frames • Sleepers  
Fencing & Stairs • Roofing  
Pergolas • Gazebos

## Designed for outdoor applications

Designed as an alternative to the traditional coach screw mainly used for timber to timber applications. Coated with a patented multi-layer corrosion resistant plating, this screw is ideal for outdoor applications.



DESIGNED  
FOR SUPERIOR  
CLAMPING



STOPS  
TIMBER  
JACKING



NO PILOT  
HOLE  
REQUIRED\*



## LONGER LASTING CORROSION RESISTANCE<sup>#</sup>

### Available in:

A4 Stainless Steel

A2 Stainless Steel

Exterior



Hex  
Head



Wafer  
Head

## Hex/Wafer Head

8mm hex head countersunk with a fixed washer or wafer head with TX30 / TX40 recess.

## Patented Molecular Lubrication

Patented lubrication, designed to enhance screw insertion time and provides greater resistance to corrosion.

## Helix

To remove debris and improve clamping.

## 50° Deep Single Thread

To provide secure fixing with high pull-out resistance.

## Type 17 Slash

Slash point tip helps prevent the timber splitting when screwing close to the edge, whilst also helping to reduce torque.

## 25° Sharp Point

Sharp point and single lead for a fast start, easy penetration and improved thread acceptance.



\* pilot hole may be required into certain hardwoods. # compared to standard zinc & clear plating

The TIMCO timber, framing and landscaping screws carry the CE mark in compliance with the Construction Products Regulations (Eurocode 5 EN1995-1-1)

## Timber Screw - Hex Head


| Exterior       |               | A4 Stainless Steel |
|----------------|---------------|--------------------|
| Silver Organic | Green Organic |                    |



EN 14592:2008

**Ultimate  
Corrosion  
Resistance!**

Please note a pilot hole  
is recommended for all  
stainless steel screws



| Product Code              | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------|-----------|------------------|----------------|--------------------|--------------------|
| <b>A4 Stainless Steel</b> |           |                  |                |                    |                    |
| <b>TUBE</b>               |           |                  |                |                    |                    |
| 50INDEXSST                | 6.7 x 50  | 8.0              | 25             | 40                 | 960                |
| 75INDEXSST                | 6.7 x 75  | 8.0              | 25             | 40                 | 960                |
| 100INDEXSST               | 6.7 x 100 | 8.0              | 25             | 40                 | 960                |
| 125INDEXSST               | 6.7 x 125 | 8.0              | 25             | 40                 | 960                |
| 150INDEXSST               | 6.7 x 150 | 8.0              | 25             | 30                 | 720                |
| 200INDEXSST               | 6.7 x 200 | 8.0              | 25             | 15                 | 540                |
| 250INDEXSST               | 6.7 x 250 | 8.0              | 25             | 18                 | 432                |
| 300INDEXSST               | 6.7 x 300 | 8.0              | 25             | 12                 | 288                |

IND01

|               |           |     |   |    |   |
|---------------|-----------|-----|---|----|---|
| <b>TIMPAC</b> |           |     |   |    |   |
| 75INDEXSSTP   | 6.7 x 75  | 8.0 | 8 | 10 | - |
| 100INDEXSSTP  | 6.7 x 100 | 8.0 | 6 | 10 | - |
| 150INDEXSSTP  | 6.7 x 150 | 8.0 | 4 | 10 | - |

PAK11

|                                  |            |      |    |    |       |
|----------------------------------|------------|------|----|----|-------|
| <b>Exterior (Silver Organic)</b> |            |      |    |    |       |
| <b>BAG</b>                       |            |      |    |    |       |
| 10100INH                         | 10.0 x 100 | 13.0 | 10 | 25 | 1,000 |
| 10150INH                         | 10.0 x 150 | 13.0 | 10 | 25 | 1,000 |
| 10200INH                         | 10.0 x 200 | 13.0 | 10 | 25 | 1,000 |

IND06

|                                      |            |      |    |    |       |
|--------------------------------------|------------|------|----|----|-------|
| <b>PACK (SOCKET DRIVER INCLUDED)</b> |            |      |    |    |       |
| 640INI                               | 6.0 x 40   | 8.0  | 10 | 10 | 1,200 |
| 660INI                               | 6.0 x 60   | 8.0  | 10 | 10 | 1,200 |
| 680INI                               | 6.0 x 80   | 8.0  | 10 | 10 | 1,200 |
| 6100INI                              | 6.0 x 100  | 8.0  | 10 | 10 | 1,200 |
| 840INI                               | 8.0 x 40   | 10.0 | 10 | 10 | 1,200 |
| 860INI                               | 8.0 x 60   | 10.0 | 10 | 10 | 1,200 |
| 875INI                               | 8.0 x 75   | 10.0 | 10 | 10 | 1,200 |
| 8100INI                              | 8.0 x 100  | 10.0 | 10 | 5  | 600   |
| 8120INI                              | 8.0 x 120  | 10.0 | 10 | 5  | 600   |
| 8150INI                              | 8.0 x 150  | 10.0 | 10 | 5  | 600   |
| 8200INI                              | 8.0 x 200  | 10.0 | 10 | 5  | 600   |
| 1060INI                              | 10.0 x 60  | 13.0 | 10 | 5  | 600   |
| 1080INI                              | 10.0 x 80  | 13.0 | 10 | 5  | 600   |
| 10100INI                             | 10.0 x 100 | 13.0 | 10 | 5  | 600   |
| 10130INI                             | 10.0 x 130 | 13.0 | 10 | 5  | 600   |
| 10150INI                             | 10.0 x 150 | 13.0 | 10 | 5  | 600   |
| 10160INI                             | 10.0 x 160 | 13.0 | 10 | 5  | 600   |
| 10200INI                             | 10.0 x 200 | 13.0 | 10 | 5  | 600   |

IND01 / IND06

| Product Code                    | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------------|-----------|------------------|----------------|--------------------|--------------------|
| <b>Exterior (Green Organic)</b> |           |                  |                |                    |                    |
| <b>BOX</b>                      |           |                  |                |                    |                    |
| 60IN                            | 6.7 x 60  | 8.0              | 50             | 35                 | 840                |
| 75IN                            | 6.7 x 75  | 8.0              | 50             | 35                 | 840                |
| 87IN                            | 6.7 x 87  | 8.0              | 50             | 35                 | 840                |
| 100IN                           | 6.7 x 100 | 8.0              | 50             | 15                 | 540                |
| 125IN                           | 6.7 x 125 | 8.0              | 50             | 15                 | 540                |
| 150IN                           | 6.7 x 150 | 8.0              | 50             | 18                 | 432                |
| 175IN                           | 6.7 x 175 | 8.0              | 50             | 18                 | 432                |
| 200IN                           | 6.7 x 200 | 8.0              | 50             | 12                 | 288                |
| 225IN                           | 6.7 x 225 | 8.0              | 50             | 9                  | 216                |
| 250IN                           | 6.7 x 250 | 8.0              | 50             | 9                  | 216                |

IND01

|               |           |     |    |   |     |
|---------------|-----------|-----|----|---|-----|
| <b>TIMBAG</b> |           |     |    |   |     |
| 100INDEXTB    | 6.7 x 100 | 8.0 | 50 | 5 | 600 |
| 150INDEXTB    | 6.7 x 150 | 8.0 | 30 | 5 | 600 |
| 200INDEXTB    | 6.7 x 200 | 8.0 | 20 | 5 | 600 |

BAG04

|               |           |     |   |    |   |
|---------------|-----------|-----|---|----|---|
| <b>TIMPAC</b> |           |     |   |    |   |
| 100INDEXP     | 6.7 x 100 | 8.0 | 6 | 10 | - |
| 150INDEXP     | 6.7 x 150 | 8.0 | 4 | 10 | - |

PAK09

### Industry Tub



Designed as an alternative to the traditional coach screw mainly used for timber to timber applications. Coated with a patented multi-layer corrosion resistant plating to withstand 1,000 hours salt spray test, this screw is ideal for external applications.

| Product Code                                 | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Pallet Qty (packs) |
|----------------------------------------------|-----------|------------------|----------------|--------------------|
| <b>Exterior (Green Organic)</b>              |           |                  |                |                    |
| <b>INDUSTRY TUB (SOCKET DRIVER INCLUDED)</b> |           |                  |                |                    |
| 87INLT                                       | 6.7 x 87  | 8.0              | 400            | 64                 |
| 100INLT                                      | 6.7 x 100 | 8.0              | 300            | 64                 |
| 150INLT                                      | 6.7 x 150 | 8.0              | 250            | 64                 |

IND01

### Grab Pack



A selection of popular exterior hex head landscaping screw sizes in a handy and reusable storage pack with clip-shut lid.

| Product Code                    | Size (mm)         | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------------|-------------------|------------------|----------------|--------------------|--------------------|
| <b>Exterior (Green Organic)</b> |                   |                  |                |                    |                    |
| <b>GRAB PACK (165 PCS)</b>      |                   |                  |                |                    |                    |
| INDGPACK                        | -                 | -                | 165            | 5                  | 150                |
|                                 | 6.7 x 75          | 8.0              | 30             |                    |                    |
|                                 | 6.7 x 87          | 8.0              | 45             |                    |                    |
|                                 | 6.7 x 100         | 8.0              | 35             |                    |                    |
|                                 | 6.7 x 125         | 8.0              | 35             |                    |                    |
|                                 | 6.7 x 150         | 8.0              | 20             |                    |                    |
|                                 | 8mm Socket Driver | -                | 1              |                    |                    |

IND01

## Timber Screw - Wafer Head

| Exterior (Green Organic) | A2 Stainless Steel |
|--------------------------|--------------------|
|--------------------------|--------------------|



TX DRIVE



EN 14592:2008

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>Exterior (Green Organic)</b>  |           |                 |                |                    |                    |
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 60INW                            | 6.7 x 60  | TX30            | 50             | 35                 | 840                |
| 75INW                            | 6.7 x 75  | TX30            | 50             | 35                 | 840                |
| 95INW                            | 6.7 x 95  | TX30            | 50             | 15                 | 540                |
| 125INW                           | 6.7 x 125 | TX30            | 50             | 15                 | 540                |
| 150INW                           | 6.7 x 150 | TX30            | 50             | 18                 | 432                |
| 175INW                           | 6.7 x 175 | TX30            | 50             | 18                 | 432                |
| 200INW                           | 8.0 x 200 | TX40            | 50             | 8                  | 192                |
| 225INW                           | 8.0 x 225 | TX40            | 50             | 6                  | 144                |
| 250INW                           | 8.0 x 250 | TX40            | 50             | 6                  | 144                |
| 275INW                           | 8.0 x 275 | TX40            | 25             | 9                  | 216                |
| 300INW                           | 8.0 x 300 | TX40            | 25             | 9                  | 216                |
| 350INW                           | 8.0 x 350 | TX40            | 25             | 9                  | 270                |
| 400INW                           | 8.0 x 400 | TX40            | 25             | 9                  | 270                |

IND02

|                                     |           |      |    |   |     |
|-------------------------------------|-----------|------|----|---|-----|
| <b>Exterior (Green Organic)</b>     |           |      |    |   |     |
| <b>TIMBAG (DRIVER BIT INCLUDED)</b> |           |      |    |   |     |
| 95INDEXWB                           | 6.7 x 95  | TX30 | 50 | 5 | 600 |
| 125INDEXWB                          | 6.7 x 125 | TX30 | 30 | 5 | 600 |
| 150INDEXWB                          | 6.7 x 150 | TX30 | 20 | 5 | 600 |

BAG05

|                                     |           |      |   |    |   |
|-------------------------------------|-----------|------|---|----|---|
| <b>TIMPAC (DRIVER BIT INCLUDED)</b> |           |      |   |    |   |
| 95INDEXWP                           | 6.7 x 95  | TX30 | 6 | 10 | - |
| 125INDEXWP                          | 6.7 x 125 | TX30 | 5 | 10 | - |
| 150INDEXWP                          | 6.7 x 150 | TX30 | 4 | 10 | - |

PAK10

|                                   |           |      |    |    |     |
|-----------------------------------|-----------|------|----|----|-----|
| <b>A2 Stainless Steel</b>         |           |      |    |    |     |
| <b>TUBE (DRIVER BIT INCLUDED)</b> |           |      |    |    |     |
| 80INDEXWSST                       | 8.0 x 80  | TX40 | 20 | 40 | 960 |
| 100INDEXWSST                      | 8.0 x 100 | TX40 | 20 | 40 | 960 |
| 125INDEXWSST                      | 8.0 x 125 | TX40 | 20 | 33 | 660 |
| 150INDEXWSST                      | 8.0 x 150 | TX40 | 20 | 24 | 480 |

IND02

## Exterior Coach Screws & Carriage Bolts



### Exterior Coach Screw

#### Exterior (Green Organic)



A traditional way of fastening timber with an added advantage of a corrosion resistant plating for external applications. Coated with a patented multi-layer corrosion resistant plating to withstand 500 hours salt spray making it ideal for external applications.

Manufactured to DIN571.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|-----------|------------------|----------------|--------------------|
| <b>BAG</b>   |           |                  |                |                    |
| 675INCSB     | 6.0 x 75  | 10.0             | 10             | 70                 |
| 850INCSB     | 8.0 x 50  | 13.0             | 10             | 70                 |
| 875INCSB     | 8.0 x 75  | 13.0             | 10             | 50                 |

IND03

### Exterior Carriage Bolt, Nut & Washer

#### Exterior (Green Organic)



A domed head bolt with a square anti spin shoulder mainly used for clamping timber or attaching ironmongery to timber.

Coated with a patented multi-layer corrosion resistant plating to withstand 500 hours salt spray making it ideal for external applications.

Manufactured to DIN 603, DIN 934 and DIN 125-A.

Supplied with hex nuts and form A washers.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|------------------|----------------|--------------------|--------------------|
| <b>BAG</b>   |           |                  |                |                    |                    |
| 10100INCB    | M10 x 100 | 17.0             | 10             | 10                 | 1000               |
| 10150INCB    | M10 x 150 | 17.0             | 10             | 6                  | 600                |
| 10160INCB    | M10 x 160 | 17.0             | 10             | 6                  | 600                |
| 10200INCB    | M10 x 200 | 17.0             | 10             | 6                  | 600                |
| 10220INCB    | M10 x 220 | 17.0             | 10             | 5                  | 500                |

IND04

#### Exterior (Silver Organic)



A domed head bolt with a square anti spin shoulder mainly used for clamping timber or attaching ironmongery to timber.

Coated with a patented multi-layer corrosion resistant plating to withstand 1,000 hours salt spray test making it ideal for external applications.

Supplied with hex nuts and form A washers.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|------------------|----------------|--------------------|--------------------|
| <b>BAG</b>   |           |                  |                |                    |                    |
| 0640CBI      | M6 x 40   | 10.0             | 10             | 5                  | 600                |
| 0650CBI      | M6 x 50   | 10.0             | 10             | 5                  | 600                |
| 0675CBI      | M6 x 75   | 10.0             | 10             | 5                  | 600                |
| 06100CBI     | M6 x 100  | 10.0             | 10             | 5                  | 600                |
| 0850CBI      | M8 x 50   | 13.0             | 10             | 5                  | 600                |
| 0875CBI      | M8 x 75   | 13.0             | 10             | 5                  | 600                |
| 08100CBI     | M8 x 100  | 13.0             | 10             | 5                  | 600                |
| 08110CBI     | M8 x 110  | 13.0             | 10             | 5                  | 600                |
| 08130CBI     | M8 x 130  | 13.0             | 10             | 5                  | 400                |
| 08150CBI     | M8 x 150  | 13.0             | 10             | 5                  | 400                |
| 1075CBI      | M10 x 75  | 17.0             | 10             | 5                  | 600                |
| 10100CBI     | M10 x 100 | 17.0             | 10             | 5                  | 600                |
| 10120CBI     | M10 x 120 | 17.0             | 10             | 5                  | 400                |
| 10130CBI     | M10 x 130 | 17.0             | 10             | 5                  | 400                |
| 10150CBI     | M10 x 150 | 17.0             | 10             | 5                  | 400                |
| 10180CBI     | M10 x 180 | 17.0             | 10             | 5                  | 400                |
| 1275CBI      | M12 x 75  | 19.0             | 10             | 5                  | 600                |
| 12100CBI     | M12 x 100 | 19.0             | 10             | 5                  | 400                |
| 12130CBI     | M12 x 130 | 19.0             | 10             | 5                  | 400                |

CAB03

## Coach Screws

Platings available:

Zinc

Page  
**35**



## Full Range of Carriage Bolts

Platings available:

Zinc

Exterior

HDG

Page  
**55**



# Advanced Coach Screws

**Ideal for:**  
Framing • Landscaping  
Fencing • Stairs • Roofing  
Gazebos • Pergolas • Sleepers

**3x FASTER**   
**THAN A STANDARD COACH SCREW**



DESIGNED  
FOR SUPERIOR  
CLAMPING



NO PILOT  
HOLE  
REQUIRED\*



STOPS  
TIMBER JACKING

**Yellow**

| Product Code                        | Size (mm)  | Socket Size (mm) | Fixed Washer Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------------|------------|------------------|---------------------|----------------|--------------------|--------------------|
| <b>BOX (SOCKET DRIVER INCLUDED)</b> |            |                  |                     |                |                    |                    |
| 625SCSY                             | 6.0 x 25   | 8                | 12.6                | 100            | 18                 | 648                |
| 640SCSY                             | 6.0 x 40   | 8                | 12.6                | 100            | 12                 | 432                |
| 650SCSY                             | 6.0 x 50   | 8                | 12.6                | 100            | 10                 | 360                |
| 660SCSY                             | 6.0 x 60   | 8                | 12.6                | 100            | 10                 | 360                |
| 670SCSY                             | 6.0 x 70   | 8                | 12.6                | 100            | 10                 | 360                |
| 680SCSY                             | 6.0 x 80   | 8                | 12.6                | 100            | 10                 | 360                |
| 6100SCSY                            | 6.0 x 100  | 8                | 12.6                | 100            | 10                 | 360                |
| 840SCSY                             | 8.0 x 40   | 10               | 14.6                | 50             | 12                 | 432                |
| 850SCSY                             | 8.0 x 50   | 10               | 14.6                | 50             | 12                 | 432                |
| 860SCSY                             | 8.0 x 60   | 10               | 14.6                | 50             | 10                 | 360                |
| 870SCSY                             | 8.0 x 70   | 10               | 14.6                | 50             | 10                 | 360                |
| 880SCSY                             | 8.0 x 80   | 10               | 14.6                | 50             | 10                 | 360                |
| 8100SCSY                            | 8.0 x 100  | 10               | 14.6                | 50             | 10                 | 360                |
| 8120SCSY                            | 8.0 x 120  | 10               | 14.6                | 50             | 8                  | 288                |
| 1040SCSY                            | 10.0 x 40  | 13               | 17.5                | 50             | 10                 | 360                |
| 1050SCSY                            | 10.0 x 50  | 13               | 17.5                | 50             | 10                 | 360                |
| 1060SCSY                            | 10.0 x 60  | 13               | 17.5                | 50             | 10                 | 360                |
| 1070SCSY                            | 10.0 x 70  | 13               | 17.5                | 50             | 10                 | 360                |
| 1080SCSY                            | 10.0 x 80  | 13               | 17.5                | 50             | 10                 | 360                |
| 10100SCSY                           | 10.0 x 100 | 13               | 17.5                | 50             | 8                  | 288                |
| 10130SCSY                           | 10.0 x 130 | 13               | 17.5                | 50             | 8                  | 288                |
| 10160SCSY                           | 10.0 x 160 | 13               | 17.5                | 50             | 6                  | 216                |
| 1280SCSY                            | 12.0 x 80  | 16               | 22.0                | 25             | 10                 | 360                |
| 12100SCSY                           | 12.0 x 100 | 16               | 22.0                | 25             | 10                 | 360                |
| 12130SCSY                           | 12.0 x 130 | 16               | 22.0                | 25             | 8                  | 288                |
| 12160SCSY                           | 12.0 x 160 | 16               | 22.0                | 25             | 6                  | 216                |

SOC03

**TIMBAG**

|            |            |    |      |     |   |   |
|------------|------------|----|------|-----|---|---|
| 660SCSYB   | 6.0 x 60   | 8  | 12.6 | 110 | 5 | - |
| 680SCSYB   | 6.0 x 80   | 8  | 12.6 | 80  | 5 | - |
| 6100SCSYB  | 6.0 x 100  | 8  | 12.6 | 70  | 5 | - |
| 880SCSYB   | 8.0 x 80   | 10 | 14.6 | 48  | 5 | - |
| 8100SCSYB  | 8.0 x 100  | 10 | 14.6 | 40  | 5 | - |
| 8120SCSYB  | 8.0 x 120  | 10 | 14.6 | 35  | 5 | - |
| 10100SCSYB | 10.0 x 100 | 13 | 17.5 | 28  | 5 | - |
| 10130SCSYB | 10.0 x 130 | 13 | 17.5 | 23  | 5 | - |
| 10160SCSYB | 10.0 x 160 | 13 | 17.5 | 18  | 5 | - |

BAG35

**TIMPAC**

|            |            |    |      |    |    |   |
|------------|------------|----|------|----|----|---|
| 640SCSYP   | 6.0 x 40   | 8  | 12.6 | 12 | 10 | - |
| 650SCSYP   | 6.0 x 50   | 8  | 12.6 | 12 | 10 | - |
| 670SCSYP   | 6.0 x 70   | 8  | 12.6 | 10 | 10 | - |
| 680SCSYP   | 6.0 x 80   | 8  | 12.6 | 10 | 10 | - |
| 6100SCSYP  | 6.0 x 100  | 8  | 12.6 | 8  | 10 | - |
| 8100SCSYP  | 8.0 x 100  | 10 | 14.6 | 4  | 10 | - |
| 8120SCSYP  | 8.0 x 120  | 10 | 14.6 | 4  | 10 | - |
| 10100SCSYP | 10.0 x 100 | 13 | 17.5 | 2  | 10 | - |

PAK08



**Hex Flange Head**

Hexagon head with fixed washer for excellent clamping.

**Partially Threaded**

Partially threaded to assist clamping of materials.

**50° Deep Single Thread**

To provide secure fixing with high pull-out resistance.

**Single Slash**


To reduce torque and the likelihood of the timber splitting when the screw is inserted close to the edge.

**25° Sharp Point**

Sharp point and single threading for a fast start, easy penetration and improved thread acceptance.



# Coach Screws



## Coach Screw

### Zinc



HEX EN 14592:2008

A traditional heavy duty woodscrew mainly used for timber to timber applications, attaching ironmongery to timber or for use with a nylon plug into masonry. Pilot holes may be required into certain hard woods.

NOTE: Thread length is 2/3 of the overall length screw.  
E.g. 100mm = 60mm thread.

| Product Code | Size (mm)  | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|------------|------------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |            |                  |                |                    |                    |
| 0625CSC      | 6.0 x 25   | 10               | 250            | 12                 | 432                |
| 0630CSC      | 6.0 x 30   | 10               | 200            | 12                 | 540                |
| 0640CSC      | 6.0 x 40   | 10               | 200            | 12                 | 432                |
| 0650CSC      | 6.0 x 50   | 10               | 200            | 8                  | 240                |
| 0660CSC      | 6.0 x 60   | 10               | 200            | 8                  | 240                |
| 0670CSC      | 6.0 x 70   | 10               | 200            | 8                  | 240                |
| 0675CSC      | 6.0 x 75   | 10               | 100            | 12                 | 432                |
| 0680CSC      | 6.0 x 80   | 10               | 100            | 12                 | 432                |
| 06100CSC     | 6.0 x 100  | 10               | 200            | 6                  | 180                |
| 0830CSC      | 8.0 x 30   | 13               | 200            | 8                  | 240                |
| 0840CSC      | 8.0 x 40   | 13               | 200            | 8                  | 240                |
| 0850CSC      | 8.0 x 50   | 13               | 100            | 12                 | 432                |
| 0860CSC      | 8.0 x 60   | 13               | 100            | 8                  | 240                |
| 0865CSC      | 8.0 x 65   | 13               | 100            | 8                  | 240                |
| 0870CSC      | 8.0 x 70   | 13               | 100            | 8                  | 240                |
| 0875CSC      | 8.0 x 75   | 13               | 100            | 8                  | 240                |
| 0880CSC      | 8.0 x 80   | 13               | 100            | 8                  | 240                |
| 0890CSC      | 8.0 x 90   | 13               | 50             | 12                 | 432                |
| 08100CSC     | 8.0 x 100  | 13               | 50             | 12                 | 432                |
| 08120CSC     | 8.0 x 120  | 13               | 50             | 12                 | 432                |
| 08150CSC     | 8.0 x 150  | 13               | 50             | 8                  | 240                |
| 1040CSC      | 10.0 x 40  | 17               | 100            | 8                  | 240                |
| 1050CSC      | 10.0 x 50  | 17               | 100            | 8                  | 240                |
| 1060CSC      | 10.0 x 60  | 17               | 100            | 6                  | 180                |
| 1070CSC      | 10.0 x 70  | 17               | 100            | 6                  | 180                |
| 1075CSC      | 10.0 x 75  | 17               | 100            | 6                  | 180                |
| 1080CSC      | 10.0 x 80  | 17               | 50             | 8                  | 240                |
| 10100CSC     | 10.0 x 100 | 17               | 50             | 8                  | 240                |
| 10120CSC     | 10.0 x 120 | 17               | 50             | 8                  | 240                |
| 10130CSC     | 10.0 x 130 | 17               | 50             | 8                  | 240                |
| 10150CSC     | 10.0 x 150 | 17               | 25             | 12                 | 432                |
| 10160CSC     | 10.0 x 160 | 17               | 25             | 12                 | 432                |
| 10200CSC     | 10.0 x 200 | 17               | 20             | 12                 | 432                |
| 1250CSC      | 12.0 x 50  | 19               | 100            | 6                  | 180                |
| 1275CSC      | 12.0 x 75  | 19               | 50             | 8                  | 240                |
| 1280CSC      | 12.0 x 80  | 19               | 25             | 12                 | 432                |
| 12100CSC     | 12.0 x 100 | 19               | 25             | 12                 | 432                |
| 12150CSC     | 12.0 x 150 | 19               | 25             | 8                  | 240                |

COA01

| Product Code  | Size (mm)  | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|------------|------------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |            |                  |                |                    |                    |
| 0650CSCB      | 6.0 x 50   | 10               | 120            | 5                  | 600                |
| 0670CSCB      | 6.0 x 70   | 10               | 100            | 5                  | 600                |
| 06100CSCB     | 6.0 x 100  | 10               | 70             | 5                  | 600                |
| 0850CSCB      | 8.0 x 50   | 13               | 75             | 5                  | 600                |
| 0860CSCB      | 8.0 x 60   | 13               | 65             | 5                  | 600                |
| 0880CSCB      | 8.0 x 80   | 13               | 48             | 5                  | 600                |
| 08100CSCB     | 8.0 x 100  | 13               | 40             | 5                  | 600                |
| 1050CSCB      | 10.0 x 50  | 17               | 45             | 5                  | 600                |
| 1080CSCB      | 10.0 x 80  | 17               | 30             | 5                  | 600                |
| 10100CSCB     | 10.0 x 100 | 17               | 28             | 5                  | 600                |
| 10120CSCB     | 10.0 x 120 | 17               | 24             | 5                  | 600                |
| 10130CSCB     | 10.0 x 130 | 17               | 23             | 5                  | 600                |
| 10150CSCB     | 10.0 x 150 | 17               | 18             | 5                  | 600                |
| 1280CSCB      | 12.0 x 80  | 19               | 25             | 5                  | 600                |
| 12100CSCB     | 12.0 x 100 | 19               | 20             | 5                  | 600                |
| 12150CSCB     | 12.0 x 150 | 19               | 12             | 5                  | 600                |

BA006

| Product Code  | Size (mm)  | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|------------|------------------|----------------|--------------------|--------------------|
| <b>TIMPAC</b> |            |                  |                |                    |                    |
| 0650CSCP      | 6.0 x 50   | 10               | 10             | 5                  | -                  |
| 0670CSCP      | 6.0 x 70   | 10               | 10             | 5                  | -                  |
| 0680CSCP      | 6.0 x 80   | 10               | 10             | 5                  | -                  |
| 06100CSCP     | 6.0 x 100  | 10               | 10             | 5                  | -                  |
| 0850CSCP      | 8.0 x 50   | 13               | 5              | 5                  | -                  |
| 0860CSCP      | 8.0 x 60   | 13               | 5              | 5                  | -                  |
| 0880CSCP      | 8.0 x 80   | 13               | 5              | 5                  | -                  |
| 08100CSCP     | 8.0 x 100  | 13               | 5              | 5                  | -                  |
| 1050CSCP      | 10.0 x 50  | 17               | 4              | 5                  | -                  |
| 1080CSCP      | 10.0 x 80  | 17               | 4              | 5                  | -                  |
| 10100CSCP     | 10.0 x 100 | 17               | 2              | 5                  | -                  |
| 10150CSCP     | 10.0 x 150 | 17               | 2              | 5                  | -                  |
| 1275CSCP      | 12.0 x 75  | 19               | 2              | 5                  | -                  |

PAK12

## Exterior Coach Screws

Page 33



## Coach Screw With Nylon Plug

### Zinc



HEX

A traditional heavy duty woodscrew with a nylon plug for masonry applications.

| Product Code  | Screw Size (mm) | Plug Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------------|----------------|------------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |                 |                |                  |                |                    |                    |
| 0660CSCNB     | 6.0 x 60        | 10 x 50        | 10               | 40             | 5                  | 600                |
| 0680CSCNB     | 6.0 x 80        | 10 x 50        | 10               | 30             | 5                  | 600                |
| 08100CSCNB    | 8.0 x 100       | 12 x 60        | 13               | 12             | 5                  | 600                |
| <b>TIMPAC</b> |                 |                |                  |                |                    |                    |
| 0660CSCNP     | 6.0 x 60        | 10 x 50        | 10               | 2              | 5                  | -                  |
| 0680CSCNP     | 6.0 x 80        | 10 x 50        | 10               | 2              | 5                  | -                  |
| 08100CSCNP    | 8.0 x 100       | 12 x 60        | 13               | 2              | 5                  | -                  |

PAK12

## Nylon Plug

NEW SIZES

### Nylon



Nylon plug for use with coach screws into masonry.



| Product Code  | Size (mm) | To Fit Screw Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|---------------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |           |                     |                |                    |                    |
| 06NLPB        | 6.0 x 30  | 3.5-5.0             | 200            | 5                  | 870                |
| 08NLPB        | 8.0 x 40  | 5.0-6.0             | 100            | 5                  | 870                |
| 10NLPB        | 10.0 x 50 | 6.0-8.0             | 70             | 5                  | 600                |
| 12NLPB        | 12.0 x 60 | 8.0-10.0            | 50             | 5                  | 600                |
| 14NLPB        | 14.0 x 75 | 10.0-12.0           | 30             | 5                  | 600                |
| <b>TIMPAC</b> |           |                     |                |                    |                    |
| 06NLPP        | 6.0 x 30  | 3.5-5.0             | 20             | 10                 | -                  |
| 08NLPP        | 8.0 x 40  | 5.0-6.0             | 10             | 10                 | -                  |
| 10NLPP        | 10.0 x 50 | 6.0-8.0             | 5              | 10                 | -                  |
| 12NLPP        | 12.0 x 60 | 8.0-10.0            | 2              | 10                 | -                  |
| 14NLPP        | 14.0 x 75 | 10.0-12.0           | 2              | 10                 | -                  |

PAK13

## CORROSION RATING

Zinc

1 2 3 4 5

Clean, dry & low humidity environments

Yellow

1 2 3 4 5

Occasionally damp/wet, rural and sheltered areas



# Drywall Screws

## Coarse Thread Screw

### Dark Grey Phosphate



PHILLIPS EN 14566



TIMBER STUD WORK

Used to secure plasterboard to timber stud work.

Note: Partially threaded from 60mm.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00025DRYC                        | 3.5 x 25  | PH2             | 1,000          | 16                 | 384                |
| 00032DRYC                        | 3.5 x 32  | PH2             | 1,000          | 12                 | 324                |
| 00035DRYC                        | 3.5 x 35  | PH2             | 1,000          | 12                 | 288                |
| 00038DRYC                        | 3.5 x 38  | PH2             | 1,000          | 12                 | 288                |
| 00042DRYC                        | 3.5 x 42  | PH2             | 1,000          | 9                  | 216                |
| 00045DRYC                        | 3.5 x 45  | PH2             | 1,000          | 8                  | 192                |
| 00050DRYC                        | 3.5 x 50  | PH2             | 1,000          | 6                  | 144                |
| 00055DRYC                        | 3.5 x 55  | PH2             | 500            | 12                 | 288                |
| 00060DRYC                        | 3.5 x 60  | PH2             | 500            | 12                 | 288                |
| 00065DRYC                        | 4.2 x 65  | PH2             | 500            | 8                  | 192                |
| 00075DRYC                        | 4.2 x 75  | PH2             | 500            | 8                  | 192                |
| 00100DRYC                        | 4.8 x 100 | PH2             | 500            | 6                  | 144                |

DRY02

### BOX OF 200

|            |          |     |     |    |       |
|------------|----------|-----|-----|----|-------|
| 00025DRYCS | 3.5 x 25 | PH2 | 200 | 75 | 1,800 |
| 00032DRYCS | 3.5 x 32 | PH2 | 200 | 50 | 1,200 |
| 00038DRYCS | 3.5 x 38 | PH2 | 200 | 35 | 840   |
| 00042DRYCS | 3.5 x 42 | PH2 | 200 | 35 | 840   |
| 00050DRYCS | 3.5 x 50 | PH2 | 200 | 35 | 840   |
| 00075DRYCS | 4.2 x 75 | PH2 | 200 | 16 | 384   |

DRY02

### TUB (DRIVER BIT INCLUDED)

|            |          |     |       |    |   |
|------------|----------|-----|-------|----|---|
| 00032DRYCT | 3.5 x 32 | PH2 | 2,000 | 20 | - |
| 00038DRYCT | 3.5 x 38 | PH2 | 1,500 | 20 | - |

DRY02

### TIMBAG

|            |          |     |     |   |     |
|------------|----------|-----|-----|---|-----|
| 00032DRYCB | 3.5 x 32 | PH2 | 400 | 5 | 600 |
| 00038DRYCB | 3.5 x 38 | PH2 | 350 | 5 | 600 |
| 00050DRYCB | 3.5 x 50 | PH2 | 250 | 5 | 600 |

BAG08

### Yellow



| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00125DRYCY                       | 4.8 x 125 | PH2             | 100            | 18                 | 432                |
| 00150DRYCY                       | 4.8 x 150 | PH2             | 100            | 18                 | 432                |

DRY02

## Fine Thread Screw

### Dark Grey Phosphate



PHILLIPS EN 14566



METAL STUD WORK

Used to secure plasterboard to wall/ceiling track systems with a max of 0.6mm thickness.

Note: Partially threaded from 60mm.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00025DRY                         | 3.5 x 25  | PH2             | 1,000          | 16                 | 384                |
| 00032DRY                         | 3.5 x 32  | PH2             | 1,000          | 12                 | 324                |
| 00035DRY                         | 3.5 x 35  | PH2             | 1,000          | 12                 | 288                |
| 00038DRY                         | 3.5 x 38  | PH2             | 1,000          | 12                 | 288                |
| 00042DRY                         | 3.5 x 42  | PH2             | 1,000          | 9                  | 216                |
| 00045DRY                         | 3.5 x 45  | PH2             | 1,000          | 8                  | 192                |
| 00050DRY                         | 3.5 x 50  | PH2             | 1,000          | 6                  | 144                |
| 00055DRY                         | 3.5 x 55  | PH2             | 500            | 12                 | 288                |
| 00060DRY                         | 3.5 x 60  | PH2             | 500            | 12                 | 288                |
| 00065DRY                         | 4.2 x 65  | PH2             | 500            | 8                  | 192                |
| 00075DRY                         | 4.2 x 75  | PH2             | 500            | 8                  | 192                |
| 00090DRY                         | 4.8 x 90  | PH2             | 500            | 6                  | 144                |
| 00100DRY                         | 4.8 x 100 | PH2             | 500            | 6                  | 144                |

DRY01

### BOX OF 200

|           |           |     |     |    |       |
|-----------|-----------|-----|-----|----|-------|
| 00025DRYS | 3.5 x 25  | PH2 | 200 | 75 | 1,800 |
| 00032DRYS | 3.5 x 32  | PH2 | 200 | 50 | 1,200 |
| 00038DRYS | 3.5 x 38  | PH2 | 200 | 35 | 840   |
| 00042DRYS | 3.5 x 42  | PH2 | 200 | 35 | 840   |
| 00045DRYS | 3.5 x 45  | PH2 | 200 | 35 | 840   |
| 00050DRYS | 3.5 x 50  | PH2 | 200 | 35 | 840   |
| 00060DRYS | 3.5 x 60  | PH2 | 200 | 15 | 540   |
| 00065DRYS | 4.2 x 65  | PH2 | 200 | 16 | 384   |
| 00075DRYS | 4.2 x 75  | PH2 | 200 | 16 | 384   |
| 00100DRYS | 4.8 x 100 | PH2 | 200 | 16 | 384   |

DRS01

### TUB (DRIVER BIT INCLUDED)

|           |          |     |       |    |   |
|-----------|----------|-----|-------|----|---|
| 00032DRYT | 3.5 x 32 | PH2 | 2,000 | 20 | - |
| 00038DRYT | 3.5 x 38 | PH2 | 1,500 | 20 | - |

DRY01

### TIMBAG

|           |          |     |     |   |     |
|-----------|----------|-----|-----|---|-----|
| 00032DRYB | 3.5 x 32 | PH2 | 400 | 5 | 600 |
| 00038DRYB | 3.5 x 38 | PH2 | 350 | 5 | 600 |
| 00042DRYB | 3.5 x 42 | PH2 | 320 | 5 | 600 |
| 00050DRYB | 3.5 x 50 | PH2 | 250 | 5 | 600 |
| 00060DRYB | 3.5 x 60 | PH2 | 200 | 5 | 600 |
| 00075DRYB | 4.2 x 75 | PH2 | 130 | 5 | 600 |
| 00090DRYB | 4.8 x 90 | PH2 | 70  | 5 | 600 |

BAG09

### Zinc



PHILLIPS EN 14566



METAL STUD WORK

Used to secure plasterboard to wall/ceiling track systems with a max of 0.6mm thickness.

Note: Partially threaded from 60mm.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00025DRYZ                        | 3.5 x 25  | PH2             | 1,000          | 16                 | 384                |
| 00032DRYZ                        | 3.5 x 32  | PH2             | 1,000          | 12                 | 324                |
| 00035DRYZ                        | 3.5 x 35  | PH2             | 1,000          | 12                 | 288                |
| 00038DRYZ                        | 3.5 x 38  | PH2             | 1,000          | 12                 | 288                |
| 00042DRYZ                        | 3.5 x 42  | PH2             | 1,000          | 9                  | 216                |
| 00045DRYZ                        | 3.5 x 45  | PH2             | 1,000          | 8                  | 192                |
| 00050DRYZ                        | 3.5 x 50  | PH2             | 1,000          | 6                  | 144                |
| 00055DRYZ                        | 3.5 x 55  | PH2             | 500            | 12                 | 288                |
| 00060DRYZ                        | 3.5 x 60  | PH2             | 500            | 12                 | 288                |
| 00065DRYZ                        | 4.2 x 65  | PH2             | 500            | 8                  | 192                |
| 00075DRYZ                        | 4.2 x 75  | PH2             | 500            | 8                  | 192                |
| 00090DRYZ                        | 4.8 x 90  | PH2             | 500            | 6                  | 144                |
| 00100DRYZ                        | 4.8 x 100 | PH2             | 500            | 6                  | 144                |
| 00125DRYZ                        | 4.8 x 125 | PH2             | 100            | 18                 | 432                |
| 00150DRYZ                        | 4.8 x 150 | PH2             | 100            | 18                 | 432                |

DRY01

## Drywall Screws

### Dense Board Screw

Dark Grey Phosphate



PHILLIPS EN 14566



ALL STUD WORK

Designed for attaching dense board to timber stud work. The super sharp point and high low thread is specifically designed for an excellent fixing into timber.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00030DRYD                        | 3.9 x 30  | PH2             | 1,000          | 16                 | 384                |
| 00045DRYD                        | 3.9 x 45  | PH2             | 1,000          | 8                  | 192                |
| 00055DRYD                        | 3.9 x 55  | PH2             | 1,000          | 6                  | 144                |

DRY03

### Self-Drilling Screw

Zinc



PHILLIPS EN 14566



METAL STUD WORK

Self-drilling point to aid fixing plasterboard to wall / ceiling track systems with a max. of 2.0mm thickness.

Note: 4.2 diameter screws drill 3.0mm and 4.8 diameter screws drill 4.0mm.

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 00025PSDD                        | 3.5 x 25  | PH2             | 1,000          | 15                 | 384                |
| 00032PSDD                        | 3.5 x 32  | PH2             | 1,000          | 12                 | 324                |
| 00038PSDD                        | 3.5 x 38  | PH2             | 1,000          | 12                 | 288                |
| 00042PSDD                        | 3.5 x 42  | PH2             | 1,000          | 12                 | 216                |
| 00050PSDD                        | 3.5 x 50  | PH2             | 1,000          | 9                  | 144                |
| 00055PSDD                        | 3.5 x 55  | PH2             | 500            | 6                  | 288                |
| 00065PSDD                        | 3.9 x 65  | PH2             | 500            | 12                 | 288                |
| 00075PSDD                        | 4.2 x 75  | PH2             | 500            | 12                 | 192                |
| 00100PSDD                        | 4.8 x 100 | PH2             | 500            | 8                  | 144                |
| 00125PSDD                        | 4.8 x 125 | PH2             | 100            | 6                  | 540                |

PSD01

|               |          |     |     |   |     |
|---------------|----------|-----|-----|---|-----|
| <b>TIMBAG</b> |          |     |     |   |     |
| 00032PSDDDB   | 3.5 x 32 | PH2 | 400 | 5 | 600 |
| 00042PSDDDB   | 3.5 x 42 | PH2 | 320 | 5 | 600 |

BAG10

## Cement Board Screws



### Twin-Cut Point

Exterior Plus



PHILLIPS EN 14566



ALL STUD WORK

Twin-cut point with a hi-low thread for fixing to timber and thin sheet metal (max. 0.6mm).

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 217789                           | 4.2 x 25  | PH2             | 200            | 50                 | 1,200              |
| 217283                           | 4.2 x 32  | PH2             | 200            | 50                 | 1,200              |
| 217796                           | 4.2 x 42  | PH2             | 200            | 35                 | 840                |

CBS01

### Self-Drilling Point

Exterior Plus



PHILLIPS EN 14566



METAL STUD WORK

Self-drilling point with self-tapping thread for fixing to steel (max. 3.0mm).

| Product Code                     | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                |                    |                    |
| 217154                           | 4.2 x 32  | PH2             | 200            | 50                 | 1,200              |
| 217228                           | 4.2 x 42  | PH2             | 200            | 35                 | 840                |


CBS01

## Metal Framing Screws

Page 46

## Drywall Bracket

Page 234

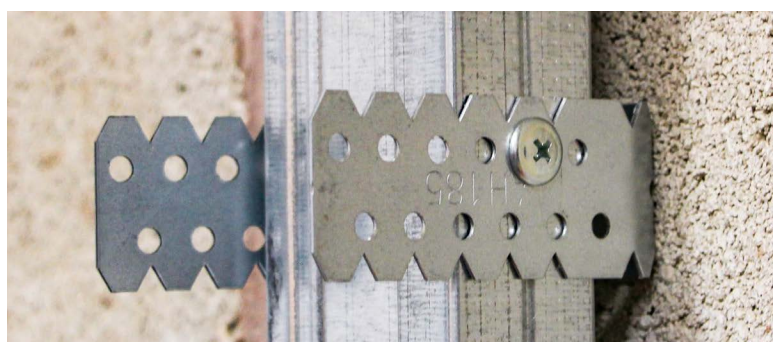

## Collated Drywall Screws



### Coarse Thread Screw

#### Black Phosphate



PHILLIPS



EN 14566



TIMBER STUD WORK

Used to secure plasterboard to timber stud work.

Note: Partially threaded from 60mm.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 00025COLDYS  | 3.5 x 25  | 1,000          | 10                 | 320                |
| 00032COLDYS  | 3.5 x 32  | 1,000          | 10                 | 320                |
| 00035COLDYS  | 3.5 x 35  | 1,000          | 10                 | 320                |
| 00038COLDYS  | 3.5 x 38  | 1,000          | 10                 | 240                |
| 00045COLDYS  | 3.5 x 45  | 1,000          | 10                 | 240                |
| 00050COLDYS  | 3.5 x 50  | 1,000          | 10                 | 240                |
| 00055COLDYS  | 3.5 x 55  | 1,000          | 10                 | 240                |
| 00065COLDYS  | 4.2 x 65  | 500            | 10                 | 240                |
| 00075COLDYS  | 4.2 x 75  | 500            | 10                 | 240                |

COL01

#### TUB

|              |          |       |   |     |
|--------------|----------|-------|---|-----|
| 00035CDRYTUB | 3.5 x 35 | 1,000 | 6 | 144 |
| 00038CDRYTUB | 3.5 x 38 | 1,000 | 6 | 144 |
| 00045CDRYTUB | 3.5 x 45 | 1,000 | 6 | 144 |
| 00055CDRYTUB | 3.5 x 55 | 800   | 6 | 144 |

COL01

### Fine Thread Screw

#### Zinc



PHILLIPS



EN 14566



METAL STUD WORK

Used to secure plasterboard to wall/ceiling track systems with a max of 0.6mm thickness.

Note: Partially threaded from 60mm.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 00025COLDZYS | 3.5 x 25  | 1,000          | 10                 | 320                |
| 00032COLDZYS | 3.5 x 32  | 1,000          | 10                 | 320                |
| 00035COLDZYS | 3.5 x 35  | 1,000          | 10                 | 320                |
| 00038COLDZYS | 3.5 x 38  | 1,000          | 10                 | 240                |
| 00042COLDZYS | 3.5 x 42  | 1,000          | 10                 | 240                |
| 00050COLDZYS | 3.5 x 50  | 1,000          | 10                 | 240                |
| 00055COLDZYS | 3.5 x 55  | 1,000          | 10                 | 240                |

COL02

### Self-Drilling Screw

#### Zinc



PHILLIPS



EN 14566



METAL STUD WORK

Self-drilling point to aid fixing plasterboard to wall /ceiling track systems with a max. of

2.0mm thickness.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 00035COLLSD  | 3.5 x 35  | 1,000          | 10                 | 320                |
| 00040COLLSD  | 3.5 x 40  | 1,000          | 10                 | 240                |
| 00045COLLSD  | 3.5 x 45  | 1,000          | 10                 | 240                |
| 00050COLLSD  | 3.5 x 50  | 1,000          | 10                 | 240                |

COL03

## Internal Collated Screws



### Flooring Screw

Yellow



SQUARE



EN 14566

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 00055COLLF   | 4.2 x 55  | 1,000          | 4                  | 128                |
| COL06        |           |                |                    |                    |

### Solo Woodscrew

Yellow



PHILLIPS



EN 14566

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 40SCOLY      | 4.2 x 40  | 1,000          | 8                  | 192                |
| 50SCOLY      | 4.2 x 50  | 1,000          | 4                  | 128                |
| 55SCOLY      | 4.2 x 55  | 1,000          | 4                  | 128                |
| 60SCOLY      | 4.5 x 60  | 500            | 8                  | 256                |
| 70SCOLY      | 4.5 x 70  | 500            | 10                 | 192                |
| COL07        |           |                |                    |                    |


## SOLO Woodscrew

Yellow

An economic single thread woodscrew designed to be consistently reliable in softwood, chipboard, plastic and some hardwoods.

For more information see page

**21**



## External Collated Screws



### C2 Deck-Fix

Exterior (Green Organic)



SQUARE



EN 14566

A premium decking screw using the C2 twin-cut technology. See page 29 for more information.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 65C2DCOLL    | 4.5 x 65  | 500            | 10                 | 240                |
| COL08        |           |                |                    |                    |

### Classic Stainless

A2 Stainless Steel



POZI



EN 14566

For more information about this product please see page 17.

| Product Code | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                |                    |                    |
| 4040CLASSCOL | 4.0 x 40  | 1,000          | 10                 | 240                |
| 4050CLASSCOL | 4.0 x 50  | 1,000          | 8                  | 192                |
| COL05        |           |                |                    |                    |

### Wing-Tip Self-Drilling

Exterior (Silver Organic)

Zinc



PHILLIPS

For more information about this product please see page 44.

| Product Code | Finish   | Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|----------|-----------|----------------|--------------------|--------------------|
| <b>BOX</b>   |          |           |                |                    |                    |
| 00044COLLW   | Exterior | 4.8 x 44  | 1,000          | 4                  | 128                |
| 4865COLLW    | Zinc     | 4.8 x 65  | 500            | 4                  | 128                |
| COL04        |          |           |                |                    |                    |



# Roofing and General Construction Screws

The TIMCO Roofing and General Construction range has been specifically designed and manufactured to meet all the recognised industry standards and performance criteria.

## Plating Guide:

### Bi-Metal - Corrosion Rating 4 out of 5

For industrial areas with a moderate salt atmosphere.

Bi-met screws combine the ultimate corrosion resistance of an A2 stainless steel fastener with the exceptional drilling performance of a hardened carbon steel drill tip.

### Exterior Plating - Corrosion Rating 3 out of 5

Use in urban and industrial areas with a low salt atmosphere.

Exterior plating gives a reliable and durable corrosion resistant coating which resists 500 hours salt-spray.

### Zinc Plating - Corrosion Rating 1 out of 5

Use in clean, dry and low humidity environments.

A bright zinc electrolytic plating with a clear toxin free finish.

## What is Effective Thread Length?

This is the threaded section of the fastener which provides the fixing. The threads must have fully penetrated the supporting steel in order for it to achieve a strong and secure fixing.

Quick reference guide for

## Rec. R.P.M

| Dia. | Rec. R.P.M    |
|------|---------------|
| M4.2 | 1,800 - 2,500 |
| M4.8 | 1,800 - 2,500 |
| M5.5 | 1,000 - 1,800 |
| M6.3 | 1,000 - 1,800 |



TESTED PRODUCTS\*

Metsec developed and now lead the market when it comes to light gauge, galvanised steel structural framing systems suitable for a wide range of applications in most sectors of construction.

We can confirm that the tested shear and tensile values are within the requirements of Metsec and therefore these fixings can be used with Metsec SFS Framing.

In addition we have reviewed the range of lengths of these fixings and can confirm that where needed these types of screws at longer lengths may also be used with Metsec SFS Framing.



## Stitching Screw - For Sheet to Sheet

Bi-Metal (SO)

Exterior (SO)

Zinc



HEX

Used for stitching two metal roofing sheets together without the need to pre-drill a hole (Max. 1.6mm). Self-drilling point and tapered shank, with a washered hexagonal head.

| Product Code                     | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer Thickness (mm) | Max. Drill Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------|---------------------|----------------------------|---------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| BMS22W16                         | 6.3x22    | 8.0              | 11.0                | 16.0                       | 1.6                       | 9                            | 100            | 35                 | 840                |
| BMR01                            |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>Exterior (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| S22W16B                          | 6.3x22    | 8.0              | 12.0                | 16.0                       | 1.6                       | 9                            | 100            | 35                 | 840                |
| S25W16B                          | 6.3x25    | 8.0              | 12.0                | 16.0                       | 1.6                       | 12                           | 100            | 35                 | 840                |
| RF01                             |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>TIMBAG</b>                    |           |                  |                     |                            |                           |                              |                |                    |                    |
| S25W16BB                         | 6.3x25    | 8.0              | 12.0                | 16.0                       | 1.6                       | 12                           | 120            | 5                  | 600                |
| BAG11                            |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>Zinc</b>                      |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BAG</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| ZS22W16                          | 6.3x22    | 8.0              | 11.0                | 16.0                       | 1.6                       | 9                            | 100            | 22                 | 792                |
| RF02                             |           |                  |                     |                            |                           |                              |                |                    |                    |

## Self-Drilling Screw - For Heavy Section Steel

Bi-Metal (SO)

Exterior (SO)

Zinc



HEX

Used for attaching metal to heavy gauge steel (max 12mm) without the need to pre-drill a hole.

| Product Code                     | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer Thickness (mm) | Max. Drill Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------|---------------------|----------------------------|---------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| BMH38                            | 5.5x38    | 8.0              | 11.0                | -                          | 12.0                      | 17                           | 100            | 35                 | 840                |
| BMH38W16                         | 5.5x38    | 8.0              | 11.0                | 16.0                       | 12.0                      | 14                           | 100            | 15                 | 540                |
| BMH55                            | 5.5x55    | 8.0              | 11.0                | -                          | 12.0                      | 34                           | 100            | 15                 | 540                |
| BMH55W16                         | 5.5x55    | 8.0              | 11.0                | 16.0                       | 12.0                      | 31                           | 100            | 16                 | 384                |
| BMR01                            |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>Exterior (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| H32B                             | 5.5x32    | 8.0              | 12.0                | -                          | 12.0                      | 13                           | 100            | 35                 | 840                |
| H32W16B                          | 5.5x32    | 8.0              | 12.0                | 16.0                       | 12.0                      | 10                           | 100            | 15                 | 540                |
| H38B                             | 5.5x38    | 8.0              | 12.0                | -                          | 12.0                      | 19                           | 100            | 35                 | 840                |
| H38W16B                          | 5.5x38    | 8.0              | 12.0                | 16.0                       | 12.0                      | 16                           | 100            | 15                 | 540                |
| H55B                             | 5.5x55    | 8.0              | 12.0                | -                          | 12.0                      | 36                           | 100            | 15                 | 540                |
| H55W16B                          | 5.5x55    | 8.0              | 12.0                | 16.0                       | 12.0                      | 33                           | 100            | 16                 | 384                |
| H65B                             | 5.5x65    | 8.0              | 12.0                | -                          | 12.0                      | 46                           | 100            | 15                 | 540                |
| H65W16B                          | 5.5x65    | 8.0              | 12.0                | 16.0                       | 12.0                      | 43                           | 100            | 16                 | 384                |
| H80B                             | 5.5x80    | 8.0              | 12.0                | -                          | 12.0                      | 56 *P/T                      | 100            | 16                 | 384                |
| H80W16B                          | 5.5x80    | 8.0              | 12.0                | 16.0                       | 12.0                      | 53 *P/T                      | 100            | 16                 | 288                |
| H100B                            | 5.5x100   | 8.0              | 12.0                | -                          | 12.0                      | 56 *P/T                      | 100            | 16                 | 288                |
| H100W16B                         | 5.5x100   | 8.0              | 12.0                | 16.0                       | 12.0                      | 53 *P/T                      | 100            | 12                 | 288                |
| RF01                             |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BAG</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| H38W16BB                         | 5.5x38    | 8.0              | 12.0                | 16.0                       | 12.0                      | 16                           | 100            | 5                  | 600                |
| BAG11                            |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>Zinc</b>                      |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| ZH32B                            | 5.5x32    | 8.0              | 12.0                | -                          | 12.0                      | 13                           | 100            | 16                 | 768                |
| ZH32W16B                         | 5.5x32    | 8.0              | 12.0                | 16.0                       | 12.0                      | 10                           | 100            | 15                 | 540                |
| ZH38B                            | 5.5x38    | 8.0              | 12.0                | -                          | 12.0                      | 19                           | 100            | 16                 | 768                |
| ZH38W16B                         | 5.5x38    | 8.0              | 12.0                | 16.0                       | 12.0                      | 16                           | 100            | 15                 | 540                |
| ZH55B                            | 5.5x55    | 8.0              | 12.0                | -                          | 12.0                      | 36                           | 100            | 15                 | 540                |
| ZH55W16B                         | 5.5x55    | 8.0              | 12.0                | 16.0                       | 12.0                      | 33                           | 100            | 16                 | 384                |
| ZH65B                            | 5.5x65    | 8.0              | 12.0                | -                          | 12.0                      | 46                           | 100            | 15                 | 540                |
| ZH65W16B                         | 5.5x65    | 8.0              | 12.0                | 16.0                       | 12.0                      | 43                           | 100            | 16                 | 384                |
| ZH80B                            | 5.5x80    | 8.0              | 12.0                | -                          | 12.0                      | 56 *P/T                      | 100            | 16                 | 384                |
| ZH80W16B                         | 5.5x80    | 8.0              | 12.0                | 16.0                       | 12.0                      | 53 *P/T                      | 100            | 12                 | 288                |
| ZH100B                           | 5.5x100   | 8.0              | 12.0                | -                          | 12.0                      | 56 *P/T                      | 100            | 12                 | 288                |
| ZH100W16B                        | 5.5x100   | 8.0              | 12.0                | 16.0                       | 12.0                      | 53 *P/T                      | 100            | 12                 | 288                |
| RF02                             |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BAG</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| ZH32W16                          | 5.5x32    | 8.0              | 11.0                | 16.0                       | 12.0                      | 10                           | 100            | 26                 | 936                |
| ZH38W16                          | 5.5x38    | 8.0              | 11.0                | 16.0                       | 12.0                      | 16                           | 100            | 24                 | 864                |
| ZH55W16                          | 5.5x55    | 8.0              | 11.0                | 16.0                       | 12.0                      | 33                           | 100            | 18                 | 648                |
| ZH80W16                          | 5.5x80    | 8.0              | 11.0                | 16.0                       | 12.0                      | *53 P/T                      | 100            | 12                 | 432                |

\*P/T = PARTIALLY THREADED

RF02

### CORROSION RATINGS

Zinc ▶ 1 2 3 4 5 Clean, dry & low humidity environments

Exterior ▶ 1 2 3 4 5 Urban & industrial areas with a low salt atmosphere

Bi-Metal (SO) ▶ 1 2 3 4 5 Urban & industrial areas with a moderate salt atmosphere

## Self-Drilling Screw - For Light Section Steel

### Bi-Metal (SO)



### Exterior (SO)



### Zinc



HEX

Used for attaching metal to light section steel (Max. 5mm) without the need to pre-drill a hole.



| Product Code                     | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer Thickness (mm) | Max. Drill Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------|---------------------|----------------------------|---------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BAG</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| BML25                            | 5.5x25    | 8.0              | 11.0                | -                          | 5.0                       | 12                           | 100            | 50                 | 1,200              |
| BML25W16                         | 5.5x25    | 8.0              | 11.0                | 16.0                       | 5.0                       | 9                            | 100            | 35                 | 840                |
| BML32                            | 5.5x32    | 8.0              | 11.0                | -                          | 5.0                       | 19                           | 100            | 50                 | 1,200              |
| BML38                            | 5.5x38    | 8.0              | 11.0                | -                          | 5.0                       | 25                           | 100            | 35                 | 840                |
| BML38W16                         | 5.5x38    | 8.0              | 11.0                | 16.0                       | 5.0                       | 22                           | 100            | 15                 | 540                |
| BML50                            | 5.5x50    | 8.0              | 11.0                | -                          | 5.0                       | 37                           | 100            | 15                 | 540                |
| BML50W16                         | 5.5x50    | 8.0              | 11.0                | 16.0                       | 5.0                       | 34                           | 100            | 15                 | 540                |
| BML70                            | 5.5x70    | 8.0              | 11.0                | -                          | 5.0                       | 57                           | 100            | 15                 | 540                |
| BML100                           | 5.5x100   | 8.0              | 11.0                | -                          | 5.0                       | 87                           | 100            | 16                 | 384                |
| BML100W16                        | 5.5x100   | 8.0              | 11.0                | 16.0                       | 5.0                       | 84                           | 100            | 9                  | 216                |

BMR01

| Product Code                     | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer Thickness (mm) | Max. Drill Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------|---------------------|----------------------------|---------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Exterior (Silver Organic)</b> |           |                  |                     |                            |                           |                              |                |                    |                    |
| <b>BOX</b>                       |           |                  |                     |                            |                           |                              |                |                    |                    |
| L19B                             | 5.5x19    | 8.0              | 12.0                | -                          | 5.0                       | 7                            | 100            | 50                 | 1,200              |
| L19W16B                          | 5.5x19    | 8.0              | 12.0                | 16.0                       | 5.0                       | 4                            | 100            | 35                 | 840                |
| L25B*                            | 5.5x25    | 8.0              | 12.0                | -                          | 5.0                       | 13                           | 100            | 50                 | 1,200              |
| L25W16B*                         | 5.5x25    | 8.0              | 12.0                | 16.0                       | 5.0                       | 10                           | 100            | 35                 | 840                |
| L32B*                            | 5.5x32    | 8.0              | 12.0                | -                          | 5.0                       | 20                           | 100            | 50                 | 1,056              |
| L32W16B*                         | 5.5x32    | 8.0              | 12.0                | 16.0                       | 5.0                       | 17                           | 100            | 15                 | 540                |
| L38B*                            | 5.5x38    | 8.0              | 12.0                | -                          | 5.0                       | 26                           | 100            | 35                 | 840                |
| L38W16B*                         | 5.5x38    | 8.0              | 12.0                | 16.0                       | 5.0                       | 23                           | 100            | 15                 | 540                |
| L50B*                            | 5.5x50    | 8.0              | 12.0                | -                          | 5.0                       | 38                           | 100            | 15                 | 540                |
| L50W16B*                         | 5.5x50    | 8.0              | 12.0                | 16.0                       | 5.0                       | 35                           | 100            | 15                 | 540                |
| L70B*                            | 5.5x70    | 8.0              | 12.0                | -                          | 5.0                       | 58                           | 100            | 15                 | 540                |
| L70W16B*                         | 5.5x70    | 8.0              | 12.0                | 16.0                       | 5.0                       | 55                           | 100            | 16                 | 384                |
| L100B*                           | 5.5x100   | 8.0              | 12.0                | -                          | 5.0                       | 88                           | 100            | 12                 | 384                |
| L100W16B*                        | 5.5x100   | 8.0              | 12.0                | 16.0                       | 5.0                       | 85                           | 100            | 9                  | 216                |

RF01

|               |        |     |      |      |     |    |     |   |     |
|---------------|--------|-----|------|------|-----|----|-----|---|-----|
| <b>TIMBAG</b> |        |     |      |      |     |    |     |   |     |
| L25BB*        | 5.5x25 | 8.0 | 12.0 | -    | 5.0 | 13 | 200 | 5 | 600 |
| L25W16BB*     | 5.5x25 | 8.0 | 12.0 | 16.0 | 5.0 | 10 | 140 | 5 | 600 |
| L32BB*        | 5.5x32 | 8.0 | 12.0 | -    | 5.0 | 20 | 160 | 5 | 600 |
| L32W16BB*     | 5.5x32 | 8.0 | 12.0 | 16.0 | 5.0 | 17 | 130 | 5 | 600 |
| L38BB*        | 5.5x38 | 8.0 | 12.0 | -    | 5.0 | 26 | 150 | 5 | 600 |
| L38W16BB*     | 5.5x38 | 8.0 | 12.0 | 16.0 | 5.0 | 23 | 110 | 5 | 600 |
| L50BB*        | 5.5x50 | 8.0 | 12.0 | -    | 5.0 | 38 | 120 | 5 | 600 |
| L50W16BB*     | 5.5x50 | 8.0 | 12.0 | 16.0 | 5.0 | 35 | 85  | 5 | 600 |
| L70BB*        | 5.5x70 | 8.0 | 12.0 | -    | 5.0 | 58 | 100 | 5 | 600 |

BAG11

|             |        |      |      |   |     |    |       |    |     |
|-------------|--------|------|------|---|-----|----|-------|----|-----|
| <b>Zinc</b> |        |      |      |   |     |    |       |    |     |
| <b>BOX</b>  |        |      |      |   |     |    |       |    |     |
| 00812HWSD   | 4.2x13 | 6.35 | 8.5  | - | 3.0 | 4  | 1,000 | 16 | 192 |
| 00834HWSD   | 4.2x19 | 6.35 | 8.5  | - | 3.0 | 10 | 1,000 | 16 | 192 |
| 01012HWSD   | 4.8x13 | 8.0  | 10.0 | - | 4.5 | 4  | 1,000 | 16 | 192 |
| 01058HWSD   | 4.8x16 | 8.0  | 10.0 | - | 4.5 | 7  | 1,000 | 12 | 144 |
| 01034HWSD   | 4.8x19 | 8.0  | 10.0 | - | 4.5 | 10 | 1,000 | 12 | 144 |
| 01234HWSD   | 5.5x19 | 8.0  | 11.0 | - | 5.0 | 8  | 500   | 16 | 192 |
| 00121HWSD   | 5.5x25 | 8.0  | 11.0 | - | 5.0 | 14 | 500   | 12 | 144 |
| 12114HWSD   | 5.5x32 | 8.0  | 11.0 | - | 5.0 | 21 | 500   | 12 | 144 |
| 12112HWSD   | 5.5x38 | 8.0  | 11.0 | - | 5.0 | 27 | 500   | 12 | 144 |
| 12134HWSD   | 5.5x45 | 8.0  | 11.0 | - | 5.0 | 34 | 500   | 8  | 96  |

RF02

|            |        |     |      |      |     |    |     |    |       |
|------------|--------|-----|------|------|-----|----|-----|----|-------|
| <b>BAG</b> |        |     |      |      |     |    |     |    |       |
| ZL19W16    | 5.5x19 | 8.0 | 11.0 | 16.0 | 5.0 | 4  | 100 | 32 | 1,152 |
| ZL25W16    | 5.5x25 | 8.0 | 11.0 | 16.0 | 5.0 | 10 | 100 | 30 | 1,080 |
| ZL32W16    | 5.5x32 | 8.0 | 11.0 | 16.0 | 5.0 | 17 | 100 | 26 | 936   |
| ZL38W16    | 5.5x38 | 8.0 | 11.0 | 16.0 | 5.0 | 23 | 100 | 24 | 864   |
| ZL50W16    | 5.5x50 | 8.0 | 11.0 | 16.0 | 5.0 | 35 | 100 | 20 | 720   |
| ZL60W16    | 5.5x60 | 8.0 | 11.0 | 16.0 | 5.0 | 45 | 100 | 16 | 576   |
| ZL70W16    | 5.5x70 | 8.0 | 11.0 | 16.0 | 5.0 | 55 | 100 | 14 | 504   |

RF02

## Self-Drilling Screw - For Light Section Composite Panel

Bi-Metal (SO)

Exterior (SO)



HEX

Specifically designed to attach composite panel to light section steel. Self-drilling point with hexagon head.



| Product Code                                                                                              | Size (mm)     | Socket Size (mm) | FW (mm) | EPDM Washer (mm) | MDT (mm) | Min - Max PT (mm) | ETL (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------------------------------------------------------------------------------------------------|---------------|------------------|---------|------------------|----------|-------------------|----------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b>                                                                          |               |                  |         |                  |          |                   |          |                |                    |                    |
| <b>BOX</b>                                                                                                |               |                  |         |                  |          |                   |          |                |                    |                    |
| BMLH70W16                                                                                                 | 5.5/6.3 x 70  | 8.0              | 12.0    | 16.0             | 5.0      | 20-50             | 27       | 100            | 16                 | 384                |
| BMLH100W16                                                                                                | 5.5/6.3 x 100 | 8.0              | 12.0    | 16.0             | 5.0      | 50-80             | 47       | 100            | 9                  | 216                |
| BMR01                                                                                                     |               |                  |         |                  |          |                   |          |                |                    |                    |
| <b>Exterior (Silver Organic)</b>                                                                          |               |                  |         |                  |          |                   |          |                |                    |                    |
| <b>BOX</b>                                                                                                |               |                  |         |                  |          |                   |          |                |                    |                    |
| LH82W16B                                                                                                  | 5.5/6.3 x 82  | 8.0              | 12.0    | 16.0             | 5.0      | 32-62             | 41       | 100            | 12                 | 288                |
| LH98W16B                                                                                                  | 5.5/6.3 x 98  | 8.0              | 12.0    | 16.0             | 5.0      | 48-78             | 41       | 100            | 9                  | 216                |
| LH115W16B                                                                                                 | 5.5/6.3 x 115 | 8.0              | 12.0    | 16.0             | 5.0      | 65-95             | 41       | 100            | 8                  | 192                |
| MDT = MAX DRILL THICKNESS • ETL = EFFECTIVE THREAD LENGTH • FW = FIXED WASHER • PT = PANEL THICKNESS RFD1 |               |                  |         |                  |          |                   |          |                |                    |                    |

## Fibre Cement Board Screw

Exterior (Silver Organic)



HEX

Used for securing fibre cement profile sheets to light section steel (max. 5mm). Complete with heavy duty EPDM and stainless steel washer to provide a water-tight seal. Also known as a BAZ washer.

Self-Drilling -  
For Light  
Section Steel

Slash Point -  
For Timber

| Product Code                                     | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer (mm) | Max. Fixture T (mm) | ETL (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------------------------------------------|-----------|------------------|---------------------|------------------|---------------------|----------|----------------|--------------------|--------------------|
| <b>Exterior (Silver Organic)</b>                 |           |                  |                     |                  |                     |          |                |                    |                    |
| <b>BOX</b>                                       |           |                  |                     |                  |                     |          |                |                    |                    |
| <b>Self-drilling - for light section steel</b>   |           |                  |                     |                  |                     |          |                |                    |                    |
| 731816                                           | 6.3 x 110 | 8.0              | 12.0                | 25.0             | 5.0                 | 46       | 50             | 8                  | 192                |
| 731274                                           | 6.3 x 130 | 8.0              | 12.0                | 25.0             | 5.0                 | 46       | 50             | 8                  | 192                |
| <b>Slash point - for timber</b>                  |           |                  |                     |                  |                     |          |                |                    |                    |
| 731339                                           | 6.3 x 130 | 8.0              | 12.0                | 25.0             | -                   | 60       | 50             | 8                  | 192                |
| ETL = EFFECTIVE THREAD LENGTH • T=THICKNESS RF06 |           |                  |                     |                  |                     |          |                |                    |                    |

## Slash Point Screw - For Sheet to Timber

Exterior (SO)

Zinc



HEX

Designed to attach sheet metal (Max 0.9mm) to timber. Slash point for easy pick up.



| Product Code                                                                 | Size (mm) | Socket Size (mm) | Fixed Washer Ø (mm) | EPDM Washer (mm) | Max. Fixture T (mm) | ETL (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|------------------------------------------------------------------------------|-----------|------------------|---------------------|------------------|---------------------|----------|----------------|--------------------|--------------------|
| <b>Exterior (Silver Organic)</b>                                             |           |                  |                     |                  |                     |          |                |                    |                    |
| <b>BOX</b>                                                                   |           |                  |                     |                  |                     |          |                |                    |                    |
| DS25W16B                                                                     | 6.3 x 25  | 8.0              | 12.0                | 16.0             | 0.9                 | 22       | 100            | 35                 | 840                |
| DS32W16B                                                                     | 6.3 x 32  | 8.0              | 12.0                | 16.0             | 0.9                 | 29       | 100            | 15                 | 540                |
| DS45W16B                                                                     | 6.3 x 45  | 8.0              | 12.0                | 16.0             | 0.9                 | 42       | 100            | 15                 | 540                |
| DS45W19B                                                                     | 6.3 x 45  | 8.0              | 12.0                | 19.0             | 0.9                 | 42       | 100            | 18                 | 432                |
| DS60W16B                                                                     | 6.3 x 60  | 8.0              | 12.0                | 16.0             | 17.0                | 57       | 100            | 18                 | 432                |
| DS60W19B                                                                     | 6.3 x 60  | 8.0              | 12.0                | 19.0             | 17.0                | 57       | 100            | 12                 | 288                |
| DS80W16B                                                                     | 6.3 x 80  | 8.0              | 12.0                | 16.0             | 37.0                | 77       | 100            | 12                 | 288                |
| DS100W16B                                                                    | 6.3 x 100 | 8.0              | 12.0                | 16.0             | 57.0                | 97       | 100            | 9                  | 216                |
| DS125W16B                                                                    | 6.3 x 125 | 8.0              | 12.0                | 16.0             | 82.0                | 122      | 100            | 8                  | 192                |
| DS150W16B                                                                    | 6.3 x 150 | 8.0              | 12.0                | 16.0             | 107.0               | 80 *P/T  | 100            | 8                  | 192                |
| RF01                                                                         |           |                  |                     |                  |                     |          |                |                    |                    |
| <b>TIMBAG</b>                                                                |           |                  |                     |                  |                     |          |                |                    |                    |
| DS32W16BB                                                                    | 6.3 x 32  | 8.0              | 12.0                | 16.0             | 0.8                 | 29       | 120            | 5                  | 600                |
| DS45W16BB                                                                    | 6.3 x 45  | 8.0              | 12.0                | 16.0             | 0.8                 | 42       | 90             | 5                  | 600                |
| BAG11                                                                        |           |                  |                     |                  |                     |          |                |                    |                    |
| <b>Zinc BAG</b>                                                              |           |                  |                     |                  |                     |          |                |                    |                    |
| ZDS25W16                                                                     | 6.3 x 25  | 8.0              | 13.0                | 16.0             | 0.8                 | 22       | 100            | 20                 | 720                |
| ZDS32W16                                                                     | 6.3 x 32  | 8.0              | 13.0                | 16.0             | 0.8                 | 29       | 100            | 18                 | 648                |
| ZDS45W16                                                                     | 6.3 x 45  | 8.0              | 13.0                | 16.0             | 0.8                 | 42       | 100            | 14                 | 504                |
| ZDS60W16                                                                     | 6.3 x 60  | 8.0              | 13.0                | 16.0             | 17.0                | 57       | 100            | 12                 | 432                |
| ZDS80W16                                                                     | 6.3 x 80  | 8.0              | 13.0                | 16.0             | 37.0                | 77       | 100            | 10                 | 360                |
| ZDS100W16                                                                    | 6.3 x 100 | 8.0              | 13.0                | 16.0             | 57.0                | 97       | 100            | 8                  | 288                |
| *P/T = PARTIALLY THREADED • ETL = EFFECTIVE THREAD LENGTH • T=THICKNESS RF02 |           |                  |                     |                  |                     |          |                |                    |                    |

## Wing-Tip Self-Drilling Screw - For Timber to Light Section Steel

Bi-Metal (SO)

Exterior (SO)

Zinc



PHILLIPS

Specifically designed to attach wood to metal. Coarse self-tapping thread with wings designed to ream out the timber, so the screw can achieve Max R.P.M. without burning out. When the wings hit the metal they will break off to permit the thread to self tap into the metal.

| Product Code                     | Size (mm) | Driver Bit Size | Max. Drilling Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|------------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b> |           |                 |                              |                              |                |                    |                    |
| <b>BOX</b>                       |           |                 |                              |                              |                |                    |                    |
| BMLW38                           | 4.8 x 38  | PH2             | 4.0                          | 18                           | 200            | 16                 | 840                |
| BMLW65                           | 5.5 x 65  | PH3             | 5.0                          | 41                           | 200            | 12                 | 288                |
| BMLW85                           | 5.5 x 85  | PH3             | 5.0                          | 47 *P/T                      | 100            | 16                 | 384                |
| BMR02                            |           |                 |                              |                              |                |                    |                    |
| <b>Exterior (Silver Organic)</b> |           |                 |                              |                              |                |                    |                    |
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                              |                              |                |                    |                    |
| LW4238S                          | 4.2 x 38  | PH2             | 3.0                          | 19                           | 200            | 16                 | 768                |
| LW38S                            | 4.8 x 38  | PH2             | 4.0                          | 16                           | 200            | 16                 | 768                |
| LW50S                            | 5.5 x 50  | PH3             | 5.0                          | 26                           | 200            | 16                 | 384                |
| LW65S                            | 5.5 x 65  | PH3             | 5.0                          | 41                           | 200            | 12                 | 288                |
| LW85S                            | 5.5 x 85  | PH3             | 5.0                          | 61                           | 100            | 16                 | 384                |
| LW100S                           | 5.5 x 100 | PH3             | 5.0                          | 61 *P/T                      | 100            | 16                 | 384                |
| RF03                             |           |                 |                              |                              |                |                    |                    |
| <b>Zinc</b>                      |           |                 |                              |                              |                |                    |                    |
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                              |                              |                |                    |                    |
| LW32B                            | 4.2 x 32  | PH2             | 4.0                          | 10                           | 200            | 22                 | 1056               |
| LW4238B                          | 4.2 x 38  | PH2             | 3.0                          | 19                           | 200            | 16                 | 768                |
| LW38B                            | 4.8 x 38  | PH2             | 4.0                          | 16                           | 200            | 16                 | 768                |
| LW50B                            | 5.5 x 50  | PH3             | 5.0                          | 26                           | 200            | 16                 | 384                |
| LW65B                            | 5.5 x 65  | PH3             | 5.0                          | 41                           | 200            | 12                 | 288                |
| LW85B                            | 5.5 x 85  | PH3             | 5.0                          | 61                           | 100            | 16                 | 384                |
| LW100B                           | 5.5 x 100 | PH3             | 5.0                          | 61 *P/T                      | 100            | 16                 | 384                |
| LW130B                           | 5.5 x 130 | PH3             | 5.0                          | 61 *P/T                      | 100            | 8                  | 384                |
| LW150B                           | 5.5 x 150 | PH3             | 5.0                          | 61 *P/T                      | 100            | 12                 | 288                |
| RF04                             |           |                 |                              |                              |                |                    |                    |
| <b>TIMBAG</b>                    |           |                 |                              |                              |                |                    |                    |
| LW38BB                           | 4.8 x 38  | PH2             | 4.0                          | 16                           | 260            | 5                  | 600                |
| LW50BB                           | 5.5 x 50  | PH3             | 5.0                          | 26                           | 150            | 5                  | 600                |
| LW65BB                           | 5.5 x 65  | PH3             | 5.0                          | 41                           | 120            | 5                  | 600                |
| BAG 12                           |           |                 |                              |                              |                |                    |                    |

\*P/T = PARTIALLY THREADED

## Wing-Tip Self-Drilling Screw - For Timber to Heavy Section Steel

Bi-Metal (SO)

Zinc



PHILLIPS

Specifically designed to attach wood to metal (Max 12mm). Metric thread with wings designed to ream out the timber, so the screw can achieve Max R.P.M. without burning out. When the wings hit the metal they will break off to permit the thread to self tap into the metal.

| Product Code                     | Size (mm) | Driver Bit Size | Max. Drilling Thickness (mm) | Effective Thread Length (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|-----------------|------------------------------|------------------------------|----------------|--------------------|--------------------|
| <b>Bi-Metal (Silver Organic)</b> |           |                 |                              |                              |                |                    |                    |
| <b>BOX</b>                       |           |                 |                              |                              |                |                    |                    |
| BMHW55                           | 5.5 x 55  | PH3             | 12.0                         | 24                           | 200            | 16                 | 384                |
| BMHW65                           | 5.5 x 65  | PH3             | 12.0                         | 34                           | 200            | 12                 | 288                |
| BMHW85                           | 5.5 x 85  | PH3             | 12.0                         | 45 *P/T                      | 100            | 16                 | 384                |
| BMHW120                          | 5.5 x 120 | PH3             | 12.0                         | 45 *P/T                      | 100            | 8                  | 384                |
| BMR02                            |           |                 |                              |                              |                |                    |                    |
| <b>Zinc</b>                      |           |                 |                              |                              |                |                    |                    |
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                 |                              |                              |                |                    |                    |
| HW45B                            | 5.5 x 45  | PH3             | 12.0                         | 15                           | 200            | 15                 | 540                |
| HW65B                            | 5.5 x 65  | PH3             | 12.0                         | 31                           | 200            | 12                 | 288                |
| HW85B                            | 5.5 x 85  | PH3             | 12.0                         | 51                           | 100            | 16                 | 384                |
| HW100B                           | 5.5 x 100 | PH3             | 12.0                         | 63                           | 100            | 16                 | 384                |
| HW120B                           | 5.5 x 120 | PH3             | 12.0                         | 51 *P/T                      | 100            | 8                  | 384                |
| RF04                             |           |                 |                              |                              |                |                    |                    |

\*P/T = PARTIALLY THREADED

# Washers, Caps & Sheet Fixings



## Hex Head Cover Cap

Cover caps are a perfect way to blend in roofing and construction screws with coloured panels. Please bare in mind we only stock a certain amount of colours, please allow at least one week for dispatch. Poppy Red caps are used for highlighting weaker transparent sheets.



Please note these colours are a guide only.  
Please refer to [www.e-paint.co.uk](http://www.e-paint.co.uk) and search for the colour name, for a more accurate colour match.

| Colour           | Code (16mm)  | Code (19mm)      | Colour Reference | Pack Qty (pcs) |
|------------------|--------------|------------------|------------------|----------------|
| <b>BAG</b>       |              |                  |                  |                |
| Black            | 1600E53CAP   | 1900E53CAP       | (BS) 00 E 53     | 1,000          |
| White            | 1600E55CAP   | 1900E55CAP       | (BS) 00 E 55     | 1,000          |
| Terracotta       | 1604C39CAP   | 1904C39CAP       | (BS) 04 C 39     | 1,000          |
| Petra            | 1604D44CAP   | 1904D44CAP       | (BS) 04 D 44     | 1,000          |
| Poppy            | 1604E53CAP   | 1904E53CAP       | (BS) 04 E 53     | 1,000          |
| Poppy            | 29mm         | Code: 2904E53CAP | (BS) 04 E 53     | 1,000          |
| Tangerine        | 1606E53CAP   | 1906E53CAP       | (BS) 06 E 53     | 1,000          |
| Flame Red        | 16RAL3000CAP | 19RAL3000CAP     | (RAL) 3000       | 1,000          |
| Burano           | 16RAL3004CAP | 19RAL3004CAP     | (RAL) 3004       | 1,000          |
| Vandyke Brown    | 1608B29CAP   | 1908B29CAP       | (BS) 08 B 29     | 1,000          |
| Beige            | 1608B17CAP   | 1908B17CAP       | (BS) 08 B 17     | 1,000          |
| Bamboo           | 1608C35CAP   | 1908C35CAP       | (BS) 08 C 35     | 1,000          |
| Goosewing Grey   | 1610A05CAP   | 1910A05CAP       | (BS) 10 A 05     | 1,000          |
| Mushroom         | 1610B19CAP   | 1910B19CAP       | (BS) 10 B 19     | 1,000          |
| Svelte Grey      | 1610B23CAP   | 1910B23CAP       | (BS) 10 B 23     | 1,000          |
| Honesty          | 1610C31CAP   | 1910C31CAP       | (BS) 10 C 31     | 1,000          |
| Aztec            | 1610E55CAP   | 1910E55CAP       | (BS) 10 E 55     | 1,000          |
| Meadowland       | 1612B17CAP   | 1912B17CAP       | (BS) 12 B 17     | 1,000          |
| Moorland Green   | 1612B21CAP   | 1912B21CAP       | (BS) 12 B 21     | 1,000          |
| Eau De Nil       | 1614E49CAP   | 1914E49CAP       | (BS) 14 B 49     | 1,000          |
| Olive Green      | 1612B27CAP   | 1912B27CAP       | (BS) 12 B 27     | 1,000          |
| Juniper Green    | 1612B29CAP   | 1912B29CAP       | (BS) 12 B 29     | 1,000          |
| Sage             | 1612D45CAP   | 1912D45CAP       | (BS) 12 D 45     | 1,000          |
| Pinewood         | 1614C39CAP   | 1914C39CAP       | (BS) 14 C 39     | 1,000          |
| Verona           | 1614E53CAP   | 1914E53CAP       | (BS) 14 E 53     | 1,000          |
| Heritage         | 16RAL6002CAP | 19RAL6002CAP     | (RAL) 6002       | 1,000          |
| Jade             | 1614C37CAP   | -                | (BS) 14 C 37     | 1,000          |
| Albatross        | 1618B17CAP   | 1918B17CAP       | (BS) 18 B 17     | 1,000          |
| Merlin Grey      | 1618B25CAP   | 1918B25CAP       | (BS) 18 B 25     | 1,000          |
| Merlin Grey      | 29mm         | Code: 2918B25CAP | (BS) 18 B 25     | 1,000          |
| Raven/Slate Blue | 1618B29CAP   | 1918B29CAP       | (BS) 18 B 29     | 1,000          |
| Ocean Blue       | 1618C39CAP   | 1918C39CAP       | (BS) 18 C 39     | 1,000          |
| Solent Blue      | 1618E53CAP   | 1918E53CAP       | (BS) 18 E 53     | 1,000          |
| Britannia        | 1618E58CAP   | 1918E58CAP       | (BS) 18 E 58     | 1,000          |
| Wedgewood Blue   | -            | 1918C37CAP       | (BS) 18 C 37     | 1,000          |
| Cornflower       | 1620E51CAP   | 1920E51CAP       | (BS) 20 E 51     | 1,000          |
| Ultra Marine     | 16RAL5002CAP | 19RAL5002CAP     | (RAL) 5003       | 1,000          |
| Sargasso         | 16RAL5003CAP | 19RAL5003CAP     | (RAL) 5003       | 1,000          |
| Gentian Blue     | 16RAL5010CAP | 19RAL5010CAP     | (RAL) 5010       | 1,000          |
| Squirrel         | 16RAL7000CAP | 19RAL7000CAP     | (RAL) 7000       | 1,000          |
| Slate Grey       | 16RAL7012CAP | 19RAL7012CAP     | (RAL) 7012       | 1,000          |
| Anthracite       | 16RAL7016CAP | 19RAL7016CAP     | (RAL) 7016       | 1,000          |
| Oyster           | 16RAL7035CAP | 19RAL7035CAP     | (RAL) 7035       | 1,000          |
| Quartz           | 16RAL7039CAP | 19RAL7039CAP     | (RAL) 7039       | 1,000          |
| Hamlet           | 16RAL9002CAP | 19RAL9002CAP     | (RAL) 9002       | 1,000          |
| White (Creamy)   | 16RAL9003CAP | 19RAL9003CAP     | (RAL) 9003       | 1,000          |
| White Alum       | 16RAL9006CAP | 19RAL9006CAP     | (RAL) 9006       | 1,000          |
| Metallic Silver  | 16S7500CAP   | 19S7500CAP       | -                | 1,000          |
| Dark Silver      | -            | 19RAL9007CAP     | (RAL) 9007       | 1,000          |
| Pure White       | 16RAL9010CAP | 19RAL9010CAP     | (RAL) 9010       | 1,000          |

RF05

## EPDM Washer

Galvanised Aluminium



Metal washer with rubber (EPDM), used to prevent washer ingress.

| Product Code      | Outer Ø (mm) | Hole Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------|--------------|-------------|----------------|--------------------|--------------------|
| <b>BAG</b>        |              |             |                |                    |                    |
| <b>Galvanised</b> |              |             |                |                    |                    |
| WG16              | 16           | 6.8         | 100            | 100                | 2400               |
| WG19              | 19           | 5.8         | 100            | 70                 | 1680               |
| <b>Aluminium</b>  |              |             |                |                    |                    |
| WA29              | 29           | 6.8         | 100            | 36                 | 864                |

RF05

## Sela Cover & Washer

Black



Used when securing roofing sheets to create a watertight seal. When using spring head roofing nails just a washer (SW) is required. If using hook bolts you will also require a Sela Cover (SC) to cover the washer and nut to complete the seal.

| Product Code  | Outer Ø (mm) | Hole Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|--------------|-------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |              |             |                |                    |                    |
| <b>Cover</b>  |              |             |                |                    |                    |
| 28SC          | 28           | -           | 75             | 5                  | 500                |
| <b>Washer</b> |              |             |                |                    |                    |
| 628SW         | 28           | M6          | 75             | 5                  | 500                |
| 828SW         | 28           | M8          | 75             | 5                  | 500                |

BAG13

## BAZ Washer

Stainless Steel



Heavy duty and high grade EPDM washer with A2 stainless steel cap to provide a watertight

seal. Also known as a BAZ washer. Frequently used with self-drilling screws in roofing applications.

| Product Code | Outer Ø (mm) | Hole Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|--------------|-------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |              |             |                |                    |                    |
| BAZ25        | 25           | 10          | 200            | 9                  | 216                |

RF05

|               |    |    |     |   |     |
|---------------|----|----|-----|---|-----|
| <b>TIMBAG</b> |    |    |     |   |     |
| BAZ25B        | 25 | 10 | 100 | 5 | 500 |

BAG13

## Dowty Type Washer

Black



Used mainly with drive screw nails and spring head roofing nails for attaching corrugated roofing sheets to wooden purlins. The washer provides a watertight seal when used correctly.

| Product Code  | Outer Ø (mm) | Hole Ø (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|--------------|-------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b> |              |             |                |                    |                    |
| 6BPRS         | 30           | M6          | 75             | 5                  | 500                |
| 8BPRS         | 30           | M8          | 75             | 5                  | 500                |

BAG13

## Corrugated Sheet Fixing



Designed to fix plastic corrugated sheets to timber. Cover caps provide a water tight seal. Spacers help stop splitting of corrugated sheets as the fixings are tightened.

Clear

Black

| Product Code           | Screw Size (imp.) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|------------------------|-------------------|----------------|--------------------|--------------------|
| <b>TIMBAG</b>          |                   |                |                    |                    |
| <b>Cap &amp; Screw</b> |                   |                |                    |                    |
| CSFC                   | Clear 10 x 3      | 50             | 250                | 600                |
| CSFB                   | Black 10 x 3      | 50             | 250                | 600                |
| <b>Spacer</b>          |                   |                |                    |                    |
| 224523                 | Clear -           | 50             | 250                | 600                |

BAG13



## Metal Framing Screws



### Low Profile - Pan Head

#### Exterior (Silver Organic)



PHILLIPS EN 14566:2008  
& EN10666:2008



STEEL

A light duty metal to metal screw with a reduced pan to give a flush finish. Silver organic plated to withstand over 500 hours salt spray test.

| Product Code                     | Size (mm) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                              |                |                    |                    |
| LPP16                            | 4.8 x 16  | 4.0                          | 500            | 15                 | 768 MFS01          |

### Low Profile - Wafer Head

#### Exterior (Silver Organic)



PHILLIPS EN 14566:2008  
& EN10666:2008



STEEL

A light duty metal to metal screw with a large flat surface under the head, making it ideal for fixing thinner sheet material when a flush finish is required. Silver organic plated to withstand over 500 hours salt spray test.

| Product Code                     | Size (mm) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                              |                |                    |                    |
| 22LPW                            | 4.8 x 22  | 4.0                          | 200            | 35                 | 840 MFS01          |

### Low Profile - Pancake Head

#### Exterior (Silver Organic)



PHILLIPS EN 14566:2008  
& EN10666:2008



STEEL



A medium duty metal to metal screw with a large flat surface under the head, making it ideal for fixing thinner sheet material when a flush finish is required. Silver organic plated to withstand over 500 hours salt spray test.

| Product Code                     | Size (mm) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                              |                |                    |                    |
| FP19                             | 5.5 x 19  | 5.0                          | 500            | 16                 | 540                |
| FP26                             | 5.5 x 26  | 5.0                          | 500            | 16                 | 384 MFS01          |

### Pan Head

#### Zinc



PHILLIPS EN 14566:2008  
& EN10666:2008



STEEL

A light duty metal to metal screw with a phillips recess used for interior applications.

| Product Code | Size (imp.) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-------------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |             |                              |                |                    |                    |
| 00658PPSD    | 6 x ½       | 2.5                          | 1,000          | 15                 | 540                |
| 00061PPSD    | 6 x 1       | 2.5                          | 1,000          | 16                 | 384                |
| 07716PPSD    | 7 x ¾       | 2.5                          | 1,000          | 15                 | 540                |
| 00812PPSD    | 8 x ½       | 3.0                          | 1,000          | 15                 | 540                |
| 812PSD       | 8 x ½       | 3.0                          | 200            | 15                 | 2,700              |
| 00834PPSD    | 8 x ¾       | 3.0                          | 1,000          | 16                 | 384                |
| 834PSD       | 8 x ¾       | 3.0                          | 200            | 75                 | 2,700              |
| 00081PPSD    | 8 x 1       | 3.0                          | 1,000          | 12                 | 288                |
| 81PSD        | 8 x 1       | 3.0                          | 200            | 75                 | 2,700 PPS01        |

### Pan Head

#### Zinc



SQUARE EN 14566:2008  
& EN10666:2008



STEEL

A light duty metal to metal screw with a square recess used for interior applications.

| Product Code | Size (imp.) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-------------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |             |                              |                |                    |                    |
| 00812SPSD    | 8 x ½       | 3.0                          | 1,000          | 15                 | 540 PPS01          |

### Wafer Head

#### Zinc



PHILLIPS EN 14566:2008



STEEL THIN SHEET

**SELF-DRILLING POINT**  
EN 10666:2008



**SHARP POINT**

Used when constructing drywall track and ceiling track systems to stitch the track together.

| Product Code                     | Size (mm) | Max. Drilling Thickness (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|----------------------------------|-----------|------------------------------|----------------|--------------------|--------------------|
| <b>BOX (DRIVER BIT INCLUDED)</b> |           |                              |                |                    |                    |
| <b>Self-drilling point</b>       |           |                              |                |                    |                    |
| 08916WHSD                        | 4.2 x 13  | 3.0                          | 1,000          | 15                 | 540                |
| 00016WHSD                        | 4.2 x 16  | 3.0                          | 1,000          | 16                 | 288                |
| 00019WHSD                        | 4.2 x 19  | 3.0                          | 1,000          | 12                 | 288                |
| 00025WHSD                        | 4.2 x 25  | 3.0                          | 1,000          | 12                 | 144                |
| <b>Sharp point</b>               |           |                              |                |                    |                    |
| 08916WHSP                        | 4.2 x 13  | 0.6                          | 1,000          | 15                 | 540 WHS01          |


# Self-Tapping Screws

Used for stitching metal or attaching to metal. A pre-drilled hole is required. Manufactured to BS4174:1972



## Pan Head

Zinc



Pan head for extra clamping.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 00438CPAZS   | 2.9 x 9.5 | PZ1             | 200            | 140                | 5040               |
| 00412CPAZS   | 2.9 x 13  | PZ1             | 200            | 140                | 5040               |
| 00638CPAZS   | 3.5 x 9.5 | PZ2             | 200            | 140                | 5040               |
| 00612CPAZS   | 3.5 x 13  | PZ2             | 200            | 140                | 5040               |
| 00658CPAZS   | 3.5 x 16  | PZ2             | 200            | 75                 | 2700               |
| 00634CPAZS   | 3.5 x 19  | PZ2             | 200            | 75                 | 2700               |
| 00061CPAZS   | 3.5 x 25  | PZ2             | 200            | 75                 | 1800               |
| 00838CPAZS   | 4.2 x 9.5 | PZ2             | 200            | 75                 | 2700               |
| 00812CPAZS   | 4.2 x 13  | PZ2             | 200            | 75                 | 2700               |
| 00858CPAZS   | 4.2 x 16  | PZ2             | 200            | 65                 | 2340               |
| 00834CPAZS   | 4.2 x 19  | PZ2             | 200            | 65                 | 1560               |
| 00081CPAZS   | 4.2 x 25  | PZ2             | 200            | 50                 | 1200               |
| 08114CPAZS   | 4.2 x 32  | PZ2             | 200            | 22                 | 1056               |
| 08112CPAZS   | 4.2 x 38  | PZ2             | 200            | 35                 | 840                |
| 00082CPAZS   | 4.2 x 50  | PZ2             | 200            | 15                 | 540                |
| 01012CPAZS   | 4.8 x 13  | PZ2             | 200            | 50                 | 1200               |
| 01058CPAZS   | 4.8 x 16  | PZ2             | 200            | 38                 | 1520               |
| 01034CPAZS   | 4.8 x 19  | PZ2             | 200            | 35                 | 840                |
| 00101CPAZS   | 4.8 x 25  | PZ2             | 200            | 22                 | 1056               |
| 10114CPAZS   | 4.8 x 32  | PZ2             | 200            | 16                 | 768                |
| 10112CPAZS   | 4.8 x 38  | PZ2             | 200            | 15                 | 540                |
| 00102CPAZS   | 4.8 x 50  | PZ2             | 200            | 15                 | 540                |
| 01212CPAZS   | 5.5 x 13  | PZ3             | 200            | 35                 | 840                |
| 00121CPAZS   | 5.5 x 25  | PZ3             | 200            | 16                 | 768                |
| 12112CPAZS   | 5.5 x 38  | PZ3             | 100            | 35                 | 840                |
| 01434CPAZS   | 6.3 x 19  | PZ3             | 200            | 16                 | 768                |

STS01

### TIMPAC

|            |           |     |    |    |   |
|------------|-----------|-----|----|----|---|
| 00614CPAZP | 3.5 x 6.5 | PZ2 | 30 | 10 | - |
| 00638CPAZP | 3.5 x 9.5 | PZ2 | 25 | 10 | - |
| 00612CPAZP | 3.5 x 13  | PZ2 | 20 | 10 | - |
| 00634CPAZP | 3.5 x 19  | PZ2 | 18 | 10 | - |
| 00838CPAZP | 4.2 x 9.5 | PZ2 | 16 | 10 | - |
| 00812CPAZP | 4.2 x 13  | PZ2 | 16 | 10 | - |
| 00858CPAZP | 4.2 x 16  | PZ2 | 14 | 10 | - |
| 00834CPAZP | 4.2 x 19  | PZ2 | 14 | 10 | - |
| 00081CPAZP | 4.2 x 25  | PZ2 | 12 | 10 | - |
| 01012CPAZP | 4.8 x 13  | PZ2 | 10 | 10 | - |
| 01034CPAZP | 4.8 x 19  | PZ2 | 10 | 10 | - |
| 01058CPAZP | 4.8 x 16  | PZ2 | 10 | 10 | - |

PAK04

## Countersunk

Zinc



Countersunk head gives a discreet finish into pre-countersunk holes.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 00612CCAAS   | 3.5 x 13  | PZ2             | 200            | 140                | 5040               |
| 00658CCAAS   | 3.5 x 16  | PZ2             | 200            | 75                 | 2700               |
| 00061CCAAS   | 3.5 x 25  | PZ2             | 200            | 75                 | 2700               |
| 00812CCAAS   | 4.2 x 13  | PZ2             | 200            | 75                 | 2700               |
| 00834CCAAS   | 4.2 x 19  | PZ2             | 200            | 65                 | 2340               |
| 00081CCAAS   | 4.2 x 25  | PZ2             | 200            | 50                 | 1200               |
| 08114CCAAS   | 4.2 x 32  | PZ2             | 200            | 22                 | 1056               |
| 08112CCAAS   | 4.2 x 38  | PZ2             | 200            | 35                 | 840                |
| 08134CCAAS   | 4.2 x 45  | PZ2             | 200            | 15                 | 540                |
| 00082CCAAS   | 4.2 x 50  | PZ2             | 200            | 15                 | 540                |
| 00101CCAAS   | 4.8 x 25  | PZ2             | 200            | 22                 | 1056               |
| 10114CCAAS   | 4.8 x 32  | PZ2             | 200            | 35                 | 840                |
| 10112CCAAS   | 4.8 x 38  | PZ2             | 200            | 15                 | 540                |
| 00102CCAAS   | 4.8 x 50  | PZ2             | 200            | 15                 | 540                |
| 12112CCAAS   | 5.5 x 38  | PZ3             | 100            | 15                 | 540                |

STS01

### TIMPAC

|            |          |     |    |    |   |
|------------|----------|-----|----|----|---|
| 00634CCAAP | 3.5 x 19 | PZ2 | 25 | 10 | - |
| 00812CCAAP | 4.2 x 13 | PZ2 | 22 | 10 | - |
| 00834CCAAP | 4.2 x 19 | PZ2 | 20 | 10 | - |
| 00081CCAAP | 4.2 x 25 | PZ2 | 18 | 10 | - |
| 08114CCAAP | 4.2 x 32 | PZ2 | 16 | 10 | - |
| 08112CCAAP | 4.2 x 38 | PZ2 | 14 | 10 | - |
| 10114CCAAP | 4.8 x 32 | PZ2 | 10 | 10 | - |

PAK04

## Flange Head

Zinc



Flange head gives an aesthetic finish whilst increasing the clamping ability of the screw. BS4174:1972 approved.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 00634CFAZS   | 3.5 x 19  | PZ2             | 200            | 75                 | 2700               |
| 00838CFAZS   | 4.2 x 9.5 | PZ2             | 200            | 75                 | 2700               |
| 00812CFAZS   | 4.2 x 13  | PZ2             | 200            | 75                 | 2700               |
| 00858CFAZS   | 4.2 x 16  | PZ2             | 200            | 75                 | 1800               |
| 00834CFAZS   | 4.2 x 19  | PZ2             | 200            | 38                 | 1824               |
| 00081CFAZS   | 4.2 x 25  | PZ2             | 200            | 50                 | 1200               |
| 08114CFAZS   | 4.2 x 32  | PZ2             | 200            | 22                 | 1056               |
| 01034CFAZS   | 4.8 x 19  | PZ2             | 200            | 22                 | 1056               |

STS01

### TIMPAC

|            |           |     |    |    |   |
|------------|-----------|-----|----|----|---|
| 00838CFAZP | 4.2 x 9.5 | PZ2 | 16 | 10 | - |
| 00812CFAZP | 4.2 x 13  | PZ2 | 16 | 10 | - |
| 00834CFAZP | 4.2 x 19  | PZ2 | 14 | 10 | - |
| 00081CFAZP | 4.2 x 25  | PZ2 | 12 | 10 | - |

PAK04

## Mixed Tray



A range of popular sizes of self-tapping screws. Three different head types; pan, countersunk and flange head.

| Product Code                  | Size (mm) | Head Type   | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-------------------------------|-----------|-------------|----------------|--------------------|--------------------|
| <b>MIXED TRAY (1,305 PCS)</b> |           |             |                |                    |                    |
| STSTRAY                       | -         | -           | 1305           | 6                  | 108                |
|                               | 3.5 x 6.5 | Pan Head    | 50             |                    |                    |
|                               | 3.5 x 13  | Pan Head    | 165            |                    |                    |
|                               | 3.5 x 19  | Countersunk | 140            |                    |                    |
|                               | 4.2 x 13  | Pan Head    | 180            |                    |                    |
|                               | 4.2 x 13  | Flange Head | 100            |                    |                    |
|                               | 4.2 x 19  | Pan Head    | 115            |                    |                    |
|                               | 4.2 x 19  | Countersunk | 140            |                    |                    |
|                               | 4.2 x 25  | Pan Head    | 80             |                    |                    |
|                               | 4.2 x 25  | Countersunk | 100            |                    |                    |
|                               | 4.2 x 38  | Countersunk | 45             |                    |                    |
|                               | 4.8 x 13  | Pan Head    | 120            |                    |                    |
|                               | 4.8 x 16  | Pan Head    | 70             |                    |                    |

STS01

# Stainless Steel Self-Tapping Screws

Used for stitching metal or attaching to metal. A pre-drilled hole is required. Stainless steel must be used where there is corrosive environment and/or the base material has inherent corrosive characteristics.



## Pan Head (DIN7981)

### A2 Stainless Steel



POZI



STEEL

THIN SHEET

Pan head for extra clamping. A2 stainless steel for ultimate resistance to corrosion.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 2965CPASS    | 2.9 x 6.5 | PZ1             | 200            | 140                | 5,040              |
| 2995CPASS    | 2.9 x 9.5 | PZ1             | 200            | 140                | 5,040              |
| 3595CPASS    | 3.5 x 9.5 | PZ2             | 200            | 140                | 5,040              |
| 3513CPASS    | 3.5 x 13  | PZ2             | 200            | 75                 | 2,700              |
| 3519CPASS    | 3.5 x 19  | PZ2             | 200            | 75                 | 1,800              |
| 3525CPASS    | 3.5 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 3938CPASS    | 3.9 x 38  | PZ2             | 200            | 22                 | 1,056              |
| 4295CPASS    | 4.2 x 9.5 | PZ2             | 200            | 75                 | 2,700              |
| 4213CPASS    | 4.2 x 13  | PZ2             | 200            | 75                 | 1,800              |
| 4216CPASS    | 4.2 x 16  | PZ2             | 200            | 38                 | 1,824              |
| 4219CPASS    | 4.2 x 19  | PZ2             | 200            | 38                 | 1,824              |
| 4225CPASS    | 4.2 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 4232CPASS    | 4.2 x 32  | PZ2             | 200            | 35                 | 840                |
| 4825CPASS    | 4.8 x 25  | PZ2             | 200            | 35                 | 840                |
| 4832CPASS    | 4.8 x 32  | PZ2             | 200            | 15                 | 720                |
| 4838CPASS    | 4.8 x 38  | PZ2             | 200            | 15                 | 540                |
| 4850CPASS    | 4.8 x 50  | PZ2             | 200            | 16                 | 384                |
| 5519CPASS    | 5.5 x 19  | PZ3             | 200            | 50                 | 1,200              |
| 5525CPASS    | 5.5 x 25  | PZ3             | 200            | 35                 | 840                |
| TAS01        |           |                 |                |                    |                    |

## Countersunk (DIN7982)

### A2 Stainless Steel



POZI



STEEL

THIN SHEET

Countersunk head gives a discreet finish into pre-countersunk holes. A2 stainless steel for ultimate resistance to corrosion.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 2913CCASS    | 2.9 x 13  | PZ1             | 200            | 140                | 5,040              |
| 2919CCASS    | 2.9 x 19  | PZ1             | 200            | 140                | 5,040              |
| 3525CCASS    | 3.5 x 25  | PZ2             | 200            | 75                 | 2,700              |
| 3995CCASS    | 3.9 x 9.5 | PZ2             | 200            | 140                | 5,040              |
| 3913CCASS    | 3.9 x 13  | PZ2             | 200            | 140                | 5,040              |
| 3925CCASS    | 3.9 x 25  | PZ2             | 200            | 38                 | 1,824              |
| 3938CCASS    | 3.9 x 38  | PZ2             | 200            | 50                 | 1,200              |
| 4295CCASS    | 4.2 x 9.5 | PZ2             | 200            | 140                | 5,040              |
| 4213CCASS    | 4.2 x 13  | PZ2             | 200            | 75                 | 2,700              |
| 4216CCASS    | 4.2 x 16  | PZ2             | 200            | 75                 | 2,700              |
| 4219CCASS    | 4.2 x 19  | PZ2             | 200            | 75                 | 1,800              |
| 4225CCASS    | 4.2 x 25  | PZ2             | 200            | 50                 | 1,200              |
| 4232CCASS    | 4.2 x 32  | PZ2             | 200            | 30                 | 1,080              |
| 4238CCASS    | 4.2 x 38  | PZ2             | 200            | 35                 | 840                |
| 4819CCASS    | 4.8 x 19  | PZ2             | 200            | 50                 | 1,200              |
| 4850CCASS    | 4.8 x 50  | PZ2             | 200            | 15                 | 540                |
| TAS01        |           |                 |                |                    |                    |

## Flange Head

### A2 Stainless Steel



POZI



STEEL

THIN SHEET

Flange head gives an aesthetic finish whilst increasing the clamping ability of the screw. A2 stainless steel for ultimate resistance to corrosion.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| 4295CFASS    | 4.2 x 9.5 | PZ2             | 200            | 75                 | 2,700              |
| 4213CFASS    | 4.2 x 13  | PZ2             | 200            | 75                 | 1,800              |
| 4219CFASS    | 4.2 x 19  | PZ2             | 200            | 50                 | 1,200              |
| TAS01        |           |                 |                |                    |                    |

## Machine Screws



### Countersunk Machine Screws

Zinc

#### Countersunk (DIN965)

Countersunk machine screws with metric thread commonly used in pre-drilled and threaded holes.



#### Countersunk (DIN965) & Hex Nut (DIN34)

A countersunk machine screw with hex full nut ideal for general light duty bolting applications where a flush finish is required.



POZI



STEEL

#### Countersunk (DIN965)

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| BOX          |           |                 |                |                    |                    |
| 4008CPM      | M4 x 8    | P22             | 100            | 75                 | 2700               |
| 4010CPM      | M4 x 10   | P22             | 100            | 75                 | 2700               |
| 4012CPM      | M4 x 12   | P22             | 100            | 75                 | 2700               |
| 4020CPM      | M4 x 20   | P22             | 100            | 75                 | 2700               |
| 4025CPM      | M4 x 25   | P22             | 100            | 75                 | 2700               |
| 4040CPM      | M4 x 40   | P22             | 100            | 50                 | 1200               |
| 5010CPM      | M5 x 10   | P22             | 100            | 75                 | 2700               |
| 5012CPM      | M5 x 12   | P22             | 100            | 75                 | 2700               |
| 5016CPM      | M5 x 16   | P22             | 100            | 75                 | 2700               |
| 5020CPM      | M5 x 20   | P22             | 100            | 75                 | 2700               |
| 5025CPM      | M5 x 25   | P22             | 100            | 50                 | 1200               |
| 5030CPM      | M5 x 30   | P22             | 100            | 50                 | 1200               |
| 5040CPM      | M5 x 40   | P22             | 100            | 50                 | 1200               |
| 5050CPM      | M5 x 50   | P22             | 100            | 35                 | 840                |
| 6010CPM      | M6 x 10   | P23             | 100            | 75                 | 2700               |
| 6012CPM      | M6 x 12   | P23             | 100            | 75                 | 2700               |
| 6016CPM      | M6 x 16   | P23             | 100            | 75                 | 2700               |
| 6020CPM      | M6 x 20   | P23             | 100            | 50                 | 1200               |
| 6025CPM      | M6 x 25   | P23             | 100            | 50                 | 1200               |
| 6030CPM      | M6 x 30   | P23             | 100            | 35                 | 840                |
| 6040CPM      | M6 x 40   | P23             | 100            | 50                 | 840                |
| 6050CPM      | M6 x 50   | P23             | 100            | 15                 | 540                |

MAC01

#### Countersunk (DIN965) & Hex Nut (DIN934)

| Product Code | Size (mm) | Driver Bit Size | Nut Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|-----------|-----------------|----------------------|----------------|--------------------|
| TIMPAC       |           |                 |                      |                |                    |
| 4025CPMHNP   | M4 x 25   | P22             | 7                    | 30             | 5                  |
| 5010CPMHNP   | M5 x 10   | P22             | 8                    | 40             | 5                  |
| 5016CPMHNP   | M5 x 16   | P22             | 8                    | 35             | 5                  |
| 5020CPMHNP   | M5 x 20   | P22             | 8                    | 30             | 5                  |
| 5025CPMHNP   | M5 x 25   | P22             | 8                    | 25             | 5                  |
| 5030CPMHNP   | M5 x 30   | P22             | 8                    | 20             | 5                  |
| 5040CPMHNP   | M5 x 40   | P22             | 8                    | 15             | 5                  |
| 6020CPMHNP   | M6 x 20   | P23             | 10                   | 20             | 5                  |
| 6040CPMHNP   | M6 x 40   | P23             | 10                   | 10             | 5                  |

PAK05

### Pan Head Machine Screws

Zinc

#### Pan Head (DIN7985)

Pan head machine screws with metric thread commonly used in pre-drilled and threaded holes. Pan head for extra clamping.



#### Pan Head (DIN7985) & Hex Nut (DIN934)

A pan head machine screw with hex full nut ideal for general light duty bolting applications where a pan head is required for extra clamping effectiveness.



POZI



STEEL

#### Pan Head (DIN7985)

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| BOX          |           |                 |                |                    |                    |
| 4010PPM      | M4 x 10   | P22             | 100            | 75                 | 2700               |
| 4012PPM      | M4 x 12   | P22             | 100            | 35                 | 2700               |
| 4016PPM      | M4 x 16   | P22             | 100            | 35                 | 2700               |
| 4020PPM      | M4 x 20   | P22             | 100            | 35                 | 2700               |
| 4025PPM      | M4 x 25   | P22             | 100            | 35                 | 2700               |
| 4030PPM      | M4 x 30   | P22             | 100            | 50                 | 1200               |
| 4040PPM      | M4 x 40   | P22             | 100            | 50                 | 1200               |
| 4050PPM      | M4 x 50   | P22             | 100            | 35                 | 840                |
| 4080PPM      | M4 x 80   | P22             | 100            | 35                 | 840                |
| 5008PPM      | M5 x 8    | P22             | 100            | 75                 | 2700               |
| 5010PPM      | M5 x 10   | P22             | 100            | 75                 | 2700               |
| 5012PPM      | M5 x 12   | P22             | 100            | 35                 | 2700               |
| 5016PPM      | M5 x 16   | P22             | 100            | 75                 | 2700               |
| 5020PPM      | M5 x 20   | P22             | 100            | 50                 | 1200               |
| 5025PPM      | M5 x 25   | P22             | 100            | 50                 | 1200               |
| 5030PPM      | M5 x 30   | P22             | 100            | 50                 | 1080               |
| 5040PPM      | M5 x 40   | P22             | 100            | 35                 | 840                |
| 5050PPM      | M5 x 50   | P22             | 100            | 35                 | 768                |
| 5100PPM      | M5 x 100  | P22             | 100            | 15                 | 540                |
| 6012PPM      | M6 x 12   | P23             | 100            | 50                 | 1200               |
| 6016PPM      | M6 x 16   | P23             | 100            | 50                 | 1080               |
| 6020PPM      | M6 x 20   | P23             | 100            | 50                 | 960                |
| 6025PPM      | M6 x 25   | P23             | 100            | 35                 | 840                |
| 6040PPM      | M6 x 40   | P23             | 100            | 22                 | 792                |

MAC01

#### Pan Head (DIN7985) & Hex Nut (DIN934)

| Product Code | Size (mm) | Driver Bit Size | Nut Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|-----------|-----------------|----------------------|----------------|--------------------|
| TIMPAC       |           |                 |                      |                |                    |
| 4012PPMHNP   | M4 x 12   | P22             | 7                    | 40             | 5                  |
| 4020PPMHNP   | M4 x 20   | P22             | 7                    | 32             | 5                  |
| 4025PPMHNP   | M4 x 25   | P22             | 7                    | 30             | 5                  |
| 4030PPMHNP   | M4 x 30   | P22             | 7                    | 25             | 5                  |
| 4040PPMHNP   | M4 x 40   | P22             | 7                    | 20             | 5                  |
| 5030PPMHNP   | M5 x 30   | P22             | 8                    | 15             | 5                  |
| 5050PPMHNP   | M5 x 50   | P22             | 8                    | 10             | 5                  |
| 6016PPMHNP   | M6 x 16   | P23             | 10                   | 15             | 5                  |
| 6040PPMHNP   | M6 x 40   | P23             | 10                   | 10             | 5                  |

PAK05

# Unreinforced & Reinforced Construction



## PVCu Fabrication Screws

1. Friction Stay Screws (FS)

2. Countersunk Screws

3. Machine Screws

4. Element Screws

5. Cill Screws

6. Baypole Screws



### Carbon Steel Zinc / Yellow

Carbon steel with a zinc or yellow plating, mainly used in low corrosive environment.

#### CORROSION RATING

1 2 3 4 5

Occasionally damp/wet, rural and sheltered areas



Salt Spray 240 hours

### Martensitic Stainless Steel

A magnetic, martensitic stainless steel, with silver organic plating. Silver organic plating is a reliable and durable corrosion resistant coating.

#### CORROSION RATING

1 2 3 4 5

Urban & industrial areas with a low salt atmosphere



Salt Spray 504 hours

### A2 Austenitic Stainless Steel

A non-magnetic austenitic steel suitable where there is a corrosive environment.

#### CORROSION RATING

1 2 3 4 5

Urban & industrial areas with a moderate salt atmosphere



Salt Spray 504 hours

All window screws have PH2 recess.





## Specialist Window Screws

### Element Screw

Yellow



PHILLIPS

- Shallow pan countersunk head
- Self-tapping thread
- AB point tip

Mechanical jointing screw with special truncated head for fixing either frame to frame or frame to mullions.

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |           |                 |                |                    |                    |
| <b>Yellow</b> |           |                 |                |                    |                    |
| 191Y          | 4.8 x 55  | PH2             | 200            | 8                  | 384                |
| 192Y          | 4.8 x 65  | PH2             | 200            | 8                  | 384                |
| 193Y          | 4.8 x 80  | PH2             | 200            | 6                  | 288                |
| 194Y          | 4.8 x 95  | PH2             | 200            | 8                  | 192                |

WIN03

### Baypole Screw

Zinc



PHILLIPS



EN 14566:2008  
& EN10666:2008

- Wafer head
- Self-tapping thread
- Self-drill tip

Specifically designed for the joining of PVCu bay window sections, but frequently used for other window and door fabrication purposes.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 289Z         | 4.8 x 40  | PH2             | 200            | 15                 | 540                |
| 290Z         | 4.8 x 50  | PH2             | 200            | 8                  | 384                |
| 291Z         | 4.8 x 60  | PH2             | 200            | 6                  | 288                |
| 292Z         | 4.8 x 70  | PH2             | 200            | 6                  | 288                |
| 293Z         | 4.8 x 80  | PH2             | 200            | 8                  | 216                |
| 294Z         | 4.8 x 90  | PH2             | 200            | 8                  | 192                |
| 295Z         | 4.8 x 100 | PH2             | 200            | 8                  | 192                |

WIN06

### Reinforced Frame Screw

Zinc

Mart SS



PHILLIPS

- Pan head
- Self-tapping thread
- Self-drilling point

Generally used for attaching steel hardware to steel reinforced PVCu sections. The flat underside of the screws head allows it to clamp the materials together firmly.

| Product Code                                            | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>                                              |           |                 |                |                    |                    |
| <b>Zinc</b>                                             |           |                 |                |                    |                    |
| 130Z                                                    | 4.2 x 13  | PH2             | 1,000          | 15                 | 540                |
| 131Z                                                    | 4.2 x 16  | PH2             | 1,000          | 15                 | 540                |
| 132Z                                                    | 4.2 x 19  | PH2             | 1,000          | 8                  | 384                |
| 133Z                                                    | 4.2 x 25  | PH2             | 1,000          | 6                  | 288                |
| <b>410 Martensitic Stainless Steel + Silver Organic</b> |           |                 |                |                    |                    |
| 130SS                                                   | 4.2 x 13  | PH2             | 1,000          | 15                 | 540                |
| 131SS                                                   | 4.2 x 16  | PH2             | 1,000          | 15                 | 540                |
| 132SS                                                   | 4.2 x 19  | PH2             | 1,000          | 8                  | 384                |
| 133SS                                                   | 4.2 x 25  | PH2             | 1,000          | 6                  | 288                |

WSS01

### Machine Screw

Zinc



PHILLIPS

- Countersunk head
- Metric thread
- B point tip

Used for fastening handles or espagnolettes into pre-defined holes in frames.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 520Z         | M5 x 20   | PH2             | 500            | 15                 | 540                |
| 530Z         | M5 x 30   | PH2             | 500            | 8                  | 384                |
| 540Z         | M5 x 40   | PH2             | 500            | 6                  | 288                |

WIN04

### Cill Screw

Zinc



PHILLIPS

- Bugle head
- Self-tapping thread
- Self-drill tip

Used for attaching cills to the base of door or window frames. The self-drilling point permits the screw to drill through both reinforced and unreinforced frames.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 225Z         | 4.2 x 50  | PH2             | 500            | 6                  | 288                |
| 226Z         | 4.2 x 55  | PH2             | 500            | 8                  | 192                |
| 227Z         | 4.2 x 65  | PH2             | 200            | 8                  | 384                |

WIN05

### Weather Bar Screw

Zinc



PHILLIPS

- Nipple head
- Self-tapping thread
- Self-drilling point

For use when attaching a weather bar or drip rail to PVCu window and door frames to prevent water ingress. Large head provides easy and secure attachment.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 241Z         | 4.0 x 13  | PH2             | 1,000          | 6                  | 288                |

WIN02

## Reinforced Frames



### 135 & 141 Range

| Zinc | Mart SS |
|------|---------|
|------|---------|



PHILLIPS FRICTION STAY

- Shallow pan head
- Self-tapping thread
- Self-drilling point

For attaching friction stays with countersunk holes to steel reinforced PVCu frames. \*Repair screws for stripped holes (141 range).

| Product Code    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX Zinc</b> |           |                 |                |                    |                    |
| 135Z            | 3.9 x 16  | PH2             | 1,000          | 15                 | 540                |
| 136Z            | 3.9 x 19  | PH2             | 1,000          | 15                 | 540                |
| 137Z            | 3.9 x 25  | PH2             | 1,000          | 6                  | 288                |
| 138Z            | 3.9 x 29  | PH2             | 1,000          | 6                  | 288                |
| 141Z*           | 4.8 x 16  | PH2             | 1,000          | 15                 | 540                |
| 142Z*           | 4.8 x 19  | PH2             | 1,000          | 8                  | 384                |
| 143Z*           | 4.8 x 23  | PH2             | 1,000          | 8                  | 384                |

WIN07

|                                            |          |     |       |    |     |
|--------------------------------------------|----------|-----|-------|----|-----|
| <b>410 Martensitic SS + Silver Organic</b> |          |     |       |    |     |
| 135SS                                      | 3.9 x 16 | PH2 | 1,000 | 15 | 540 |
| 136SS                                      | 3.9 x 19 | PH2 | 1,000 | 15 | 540 |
| 137SS                                      | 3.9 x 25 | PH2 | 1,000 | 6  | 288 |
| 138SS                                      | 3.9 x 29 | PH2 | 1,000 | 6  | 288 |
| 143SS*                                     | 4.8 x 23 | PH2 | 1,000 | 9  | 216 |

WSS02

### 150 Range

| Zinc | Yellow |
|------|--------|
|------|--------|



PHILLIPS

- Countersunk head
- Metric thread
- Self-drilling point

An alternative to the self-tapping thread version. This metric threaded screw has multiple uses for fitting a variety of hardware to frames where there is a steel reinforcement present.

| Product Code    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX Zinc</b> |           |                 |                |                    |                    |
| 150Z            | M4 x 16   | PH2             | 1,000          | 15                 | 540                |
| 151Z            | M4 x 19   | PH2             | 1,000          | 15                 | 540                |
| 153Z            | M4 x 25   | PH2             | 1,000          | 8                  | 384                |
| 154Z            | M4 x 32   | PH2             | 1,000          | 8                  | 192                |
| 155Z            | M4 x 38   | PH2             | 500            | 8                  | 384                |

|               |         |     |       |    |     |
|---------------|---------|-----|-------|----|-----|
| <b>Yellow</b> |         |     |       |    |     |
| 150Y          | M4 x 16 | PH2 | 1,000 | 15 | 540 |
| 151Y          | M4 x 19 | PH2 | 1,000 | 15 | 540 |
| 153Y          | M4 x 25 | PH2 | 1,000 | 8  | 384 |
| 155Y          | M4 x 38 | PH2 | 500   | 8  | 384 |

WIN01

### 230 Range

| Zinc | Mart SS |
|------|---------|
|------|---------|



PHILLIPS

- Countersunk facet head
- Metric thread
- Self-drilling point

Frequently used with auto feed machines when 'pinning' steel reinforcement inside PVCu frames.

| Product Code    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX Zinc</b> |           |                 |                |                    |                    |
| 230Z            | M4 x 13   | PH2             | 1,000          | 15                 | 540                |
| 231Z            | M4 x 16   | PH2             | 1,000          | 15                 | 540                |
| 232Z            | M4 x 19   | PH2             | 1,000          | 15                 | 540                |

WIN01

|                                            |         |     |       |    |     |
|--------------------------------------------|---------|-----|-------|----|-----|
| <b>410 Martensitic SS + Silver Organic</b> |         |     |       |    |     |
| 231SS                                      | M4 x 16 | PH2 | 1,000 | 15 | 540 |

WSS03

### 423 Range

| Zinc |
|------|
|------|



PHILLIPS

- Countersunk head
- Self-tapping thread
- Self-drilling point

A heavier gauge screw, generally used where extra strength is required such as attaching hinges to a steel reinforced frame.

| Product Code    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX Zinc</b> |           |                 |                |                    |                    |
| 423Z            | 4.8 x 25  | PH2             | 1,000          | 6                  | 288                |
| 424Z            | 4.8 x 32  | PH2             | 500            | 8                  | 384                |
| 425Z            | 4.8 x 38  | PH2             | 500            | 8                  | 288                |
| 427Z            | 4.8 x 45  | PH2             | 500            | 6                  | 288                |
| 429Z            | 4.8 x 60  | PH2             | 200            | 8                  | 384                |

WIN01

### 120 Range

| Zinc | Yellow | Mart SS |
|------|--------|---------|
|------|--------|---------|



PHILLIPS

- Countersunk head (\*with ribs)
- Self-tapping thread
- Self-drilling point

Multiple uses for fitting a variety of hardware to frames where there is a steel or aluminium reinforcement present.

| Product Code    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|-----------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX Zinc</b> |           |                 |                |                    |                    |
| 120Z*           | 3.9 x 13  | PH2             | 1,000          | 15                 | 540                |
| 121Z*           | 3.9 x 16  | PH2             | 1,000          | 15                 | 540                |
| 122Z*           | 3.9 x 19  | PH2             | 1,000          | 15                 | 540                |
| 123Z            | 3.9 x 25  | PH2             | 1,000          | 8                  | 384                |
| 126Z            | 3.9 x 29  | PH2             | 1,000          | 8                  | 384                |
| 124Z            | 3.9 x 32  | PH2             | 1,000          | 6                  | 288                |
| 125Z            | 3.9 x 38  | PH2             | 1,000          | 6                  | 288                |
| 127Z            | 3.9 x 45  | PH2             | 500            | 8                  | 384                |

|               |          |     |       |    |     |
|---------------|----------|-----|-------|----|-----|
| <b>Yellow</b> |          |     |       |    |     |
| 120Y*         | 3.9 x 13 | PH2 | 1,000 | 15 | 540 |
| 121Y*         | 3.9 x 16 | PH2 | 1,000 | 15 | 540 |
| 122Y*         | 3.9 x 19 | PH2 | 1,000 | 15 | 540 |
| 123Y          | 3.9 x 25 | PH2 | 1,000 | 8  | 384 |
| 124Y          | 3.9 x 32 | PH2 | 1,000 | 6  | 288 |
| 125Y          | 3.9 x 38 | PH2 | 1,000 | 6  | 288 |
| 127Y          | 3.9 x 45 | PH2 | 500   | 8  | 384 |

WIN01

|                                            |          |     |       |    |     |
|--------------------------------------------|----------|-----|-------|----|-----|
| <b>410 Martensitic SS + Silver Organic</b> |          |     |       |    |     |
| 121SS*                                     | 3.9 x 16 | PH2 | 1,000 | 15 | 540 |
| 122SS*                                     | 3.9 x 19 | PH2 | 1,000 | 15 | 540 |
| 123SS                                      | 3.9 x 25 | PH2 | 1,000 | 8  | 384 |
| 124SS                                      | 3.9 x 32 | PH2 | 1,000 | 6  | 288 |
| 125SS                                      | 3.9 x 38 | PH2 | 1,000 | 6  | 288 |

WSS03

## Shims, Packers & Wedges

For full range, sold in various quantities & sizes  
**See Page 237**



# Unreinforced Frames

## 100 Range

Zinc

Yellow



PHILLIPS

- Countersunk head with ribs
- High-Low thread
- Slash tip

Multiple uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.

\*Repair screws for stripped holes.

| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |           |                 |                |                    |                    |
| <b>Zinc</b>   |           |                 |                |                    |                    |
| 104Z          | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |
| 105Z          | 4.3 x 30  | PH2             | 1,000          | 8                  | 384                |
| 106Z          | 4.3 x 40  | PH2             | 1,000          | 8                  | 192                |
| 109Z*         | 4.8 x 25  | PH2             | 1,000          | 8                  | 384                |
| <b>Yellow</b> |           |                 |                |                    |                    |
| 104Y          | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |
| 105Y          | 4.3 x 30  | PH2             | 1,000          | 8                  | 384                |
| 106Y          | 4.3 x 40  | PH2             | 1,000          | 8                  | 192                |
| 109Y*         | 4.8 x 25  | PH2             | 1,000          | 8                  | 384                |

WIN01

## 200 Range

Zinc

Yellow

A2/Aust. SS



PHILLIPS

- Countersunk head with ribs
- Single thread
- Gimlet tip

Multiple uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.

\*Repair screws for stripped holes.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 201Z         | 4.3 x 16  | PH2             | 1,000          | 15                 | 540                |
| 202Z         | 4.3 x 20  | PH2             | 1,000          | 15                 | 540                |
| 204Z         | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |
| 205Z         | 4.3 x 30  | PH2             | 1,000          | 8                  | 384                |
| 203Z         | 4.3 x 35  | PH2             | 1,000          | 6                  | 288                |
| 206Z         | 4.3 x 40  | PH2             | 1,000          | 8                  | 192                |
| 207Z         | 4.3 x 45  | PH2             | 500            | 8                  | 384                |
| 208Z         | 4.3 x 55  | PH2             | 500            | 6                  | 288                |
| 209Z*        | 4.8 x 25  | PH2             | 1,000          | 8                  | 384                |
| 210Z*        | 4.8 x 38  | PH2             | 1,000          | 8                  | 192                |

WIN01



| Product Code  | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>    |           |                 |                |                    |                    |
| <b>Yellow</b> |           |                 |                |                    |                    |
| 201Y          | 4.3 x 16  | PH2             | 1,000          | 15                 | 540                |
| 202Y          | 4.3 x 20  | PH2             | 1,000          | 15                 | 540                |
| 204Y          | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |
| 205Y          | 4.3 x 30  | PH2             | 1,000          | 8                  | 384                |
| 203Y          | 4.3 x 35  | PH2             | 1,000          | 6                  | 288                |
| 206Y          | 4.3 x 40  | PH2             | 1,000          | 8                  | 192                |
| 207Y          | 4.3 x 45  | PH2             | 500            | 8                  | 384                |
| 208Y          | 4.3 x 55  | PH2             | 500            | 6                  | 288                |
| 209Y*         | 4.8 x 25  | PH2             | 1,000          | 8                  | 384                |

WIN01

| <b>A2/Aust. Stainless Steel</b> |          |     |       |    |     |
|---------------------------------|----------|-----|-------|----|-----|
| 202SS                           | 4.3 x 20 | PH2 | 1,000 | 15 | 540 |
| 204SS                           | 4.3 x 25 | PH2 | 1,000 | 8  | 384 |
| 205SS                           | 4.3 x 30 | PH2 | 1,000 | 8  | 384 |
| 203SS                           | 4.3 x 35 | PH2 | 1,000 | 6  | 288 |
| 206SS                           | 4.3 x 40 | PH2 | 1,000 | 8  | 192 |
| 209SS*                          | 4.8 x 25 | PH2 | 1,000 | 8  | 384 |

WSS01

## 111 Range

Zinc



PHILLIPS

FS

FRICTION STAY

- Shallow pan countersunk head
- High-Low thread
- Slash tip

For attaching friction stays to PVCu frames. An alternative to the single thread range offering a slash point and a High-Low thread to aid speed of insertion and pull out.

| Product Code | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>   |           |                 |                |                    |                    |
| <b>Zinc</b>  |           |                 |                |                    |                    |
| 111Z         | 4.3 x 20  | PH2             | 1,000          | 8                  | 384                |
| 112Z         | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |

WIN01

## 215 Range

Zinc

A2/Aust. SS



PHILLIPS

FS

FRICTION STAY

- Shallow pan head with serrations
- Single thread
- Gimlet tip

For attaching friction stays with pre-drilled holes to PVCu frames. Stainless steel screws should be used where there is a corrosive environment.

| Product Code                    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>                      |           |                 |                |                    |                    |
| <b>Zinc</b>                     |           |                 |                |                    |                    |
| 215Z                            | 4.8 x 16  | PH2             | 1,000          | 8                  | 384                |
| 216Z                            | 4.8 x 20  | PH2             | 1,000          | 8                  | 384                |
| 217Z                            | 4.8 x 25  | PH2             | 1,000          | 6                  | 288                |
| 218Z                            | 4.8 x 30  | PH2             | 1,000          | 8                  | 192                |
| <b>A2/Aust. Stainless Steel</b> |           |                 |                |                    |                    |
| 215SS                           | 4.8 x 16  | PH2             | 1,000          | 8                  | 384                |
| 216SS                           | 4.8 x 20  | PH2             | 1,000          | 8                  | 384                |
| 217SS                           | 4.8 x 25  | PH2             | 1,000          | 6                  | 288                |
| 218SS                           | 4.8 x 30  | PH2             | 1,000          | 8                  | 192                |

WSS02

## 211 Range

Zinc

A2/Aust. SS



PHILLIPS

FS

FRICTION STAY

- Shallow pan countersunk head
- Single thread
- Gimlet tip

For attaching friction stays with countersunk holes to PVCu frames. Stainless steel screws should be used where there is a corrosive environment.

| Product Code                    | Size (mm) | Driver Bit Size | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|---------------------------------|-----------|-----------------|----------------|--------------------|--------------------|
| <b>BOX</b>                      |           |                 |                |                    |                    |
| <b>Zinc</b>                     |           |                 |                |                    |                    |
| 213Z                            | 4.3 x 16  | PH2             | 1,000          | 15                 | 540                |
| 211Z                            | 4.3 x 20  | PH2             | 1,000          | 8                  | 384                |
| 212Z                            | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |
| <b>A2/Aust. Stainless Steel</b> |           |                 |                |                    |                    |
| 213SS                           | 4.3 x 16  | PH2             | 1,000          | 15                 | 540                |
| 211SS                           | 4.3 x 20  | PH2             | 1,000          | 8                  | 432                |
| 212SS                           | 4.3 x 25  | PH2             | 1,000          | 8                  | 384                |

WSS02



Merlin Accessories Ltd  
Unit G, Nickel Close  
Winnall Trading Estate  
Winchester  
SO23 7RJ

01962 842002

Opening Hours  
Monday to Thursday: 7:30 - 17:30  
Friday: 7:30 - 17:00